

AMAZ LIGHT



PROJECT LIGHTING SOLUTION PROVIDER



Indoor lighting collection

Love Life, Love Light

COMPANY PROFILE


Welcome to AMAZ LIGHT, where lighting meets innovation.

Founded by a visionary team with 14 years of experience in commercial lighting, we're experts in tailored solutions for international clients. The brand name AMAZ is derived from the word "amazing." We aim to provide our partners with a professional and extraordinary lighting experience.

As a China-based ODM/OEM LED fixtures supplier, AMAZ LIGHT specializes in high-end fixtures with rich export experience to Germany, Italy, Spain, France, the United Kingdom, Australia, Southeast Asia, and the Middle East. Our focus is on architectural lighting for commercial, hotel, residential, and office applications, promoting a sustainable, human-centric, connected lighting world.

Seamlessly integrating Western ideas with Chinese speed, AMAZ LIGHT excels in innovation and quality solutions for topclass brands and major projects. Our 'universal design' philosophy allows interchangeability across product families, delivering customized solutions with short lead times. Our core values—customer-centricity, quality excellence, professional collaboration, and pursuit of excellence—guide our approach. Embracing a spirit of collaboration and innovation, we prioritize continuous improvement, attention to detail, execution focus, and a people-centric approach. commercial, hotel, residential, and office applications, promoting a sustainable, human-centric, connected lighting world.

At AMAZ LIGHT, our mission is to elevate life quality through inclusive product design. Our operational philosophy, "Embrace All, Benefit All," underscores our commitment to being a top-tier, design-leading lighting enterprise. Committed to constant innovation, AMAZ LIGHT aims to design and manufacture the best quality LED lights for global partners and customers. Whether meeting standard requirements or crafting bespoke solutions, AMAZ LIGHT stands ready with unique offerings to illuminate and elevate spaces worldwide.

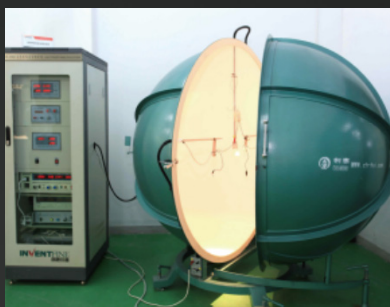

AMAZ LIGHT

Lighting Color Management ($\pm 50K$)

Color temperature is a method of measuring temperature which is used in physics and astronomy. In order to solve the problem of color space perception consistency, experts have carried out nonlinear transformation of light color system and formulated the specification of CIE 1931 XYZ color space. According to the position of the sun moving in the sky, we define the position of light color on the CIE gamut map.



CRI Management (>90)

The appear level of the LED to subject is called color rendering which is the realistic level of the color. The LED with high color rendering will reappear the color well that is close to the original color. The LED with low color rendering will make big deviation compared to the original color. Color rendering is the trueness percentage of the objects under LED and the sun.


CRI 75



CRI 80



CRI 90

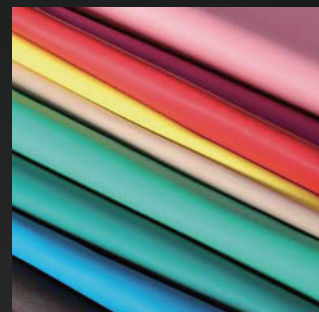



Color Temperature Consistency ($<3SDCM$)

Standard spectrum will be changed with color temperature and there is difference between standard spectrum and SDCM even for one chip.

AMAZ LIGHT

Comfortable Lighting Performance


Anti-glare reflector technology is to improve the quality of light in harmony with visual comfort. It helps to protect human eyes from glare coming out from bright light source and minimize visual stress every day.

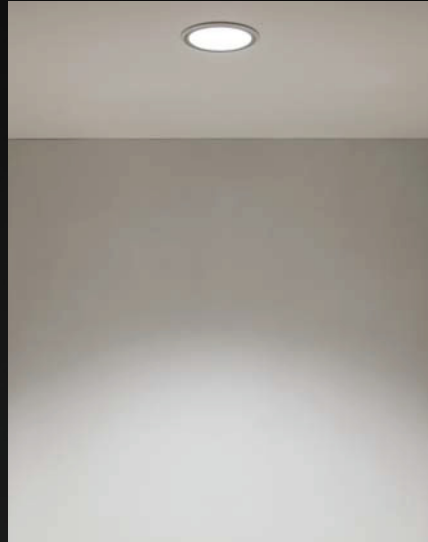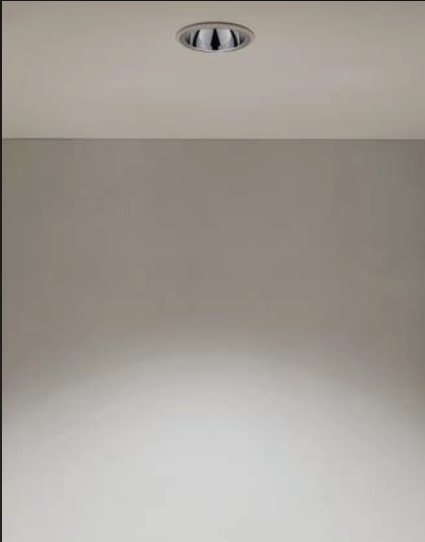


Advanced Optical Control

We developed by adopting world top-class optics technology and processed in scientific and strict techniques to guarantee the optical quality of this series. The lens can make the beam angle precisely with clean and even light spot without dark area, stray light and other defects. And the products are with precise lighting distribution and high efficient output, soft, even and clean light without dark area


Light Performance(Unit square: 500*500mm)




10°




15°




24°




36°




50°




10°




15°



24°



36°





50°





INDOOR INDEX


Skyfall for Recessed Module Downlight

A-DR11058	A-DR11058T	A-DR11075	A-DR11075A	A-DR11100	A-DR11125
					
9W 1-1	9W 1-2	15W 1-3	15W 1-4	20W 1-5	35W 1-6
A-DR12058	A-DR12058T	A-DR12075	A-DR12075B	A-DR12100	A-DR12125
					
9W 1-7	9W 1-8	15W 1-9	15W 1-10	20W 1-11	35W 1-12

Valo for Recessed Mini Downlight

A-DR21030	A-DR21040	A-DR21050	A-DR22030	A-DR22040	A-DR22050
					
1.5W 2-1	3W 2-2	5W 2-3	1.5W 2-4	3W 2-5	5W 2-6


Vali for Recessed Mini Downlight

A-DR23025	A-DR23050	A-DR23050T	A-DR24035	A-DR24050	A-DR24050T
					
6W 2-7	9W 2-8	9W 2-9	6W 2-10	9W 2-11	9W 2-12

INDOOR INDEX

Luna for Recessed Downlight & Wash Washer

A-FDR11055



7W

4-1


A-FDR11075



12W

4-2


A-FDR11095



18W

4-3


A-FDR11075W



12W

4-4

A-FDR11095W




18W

4-5

Flux for Recessed Downlight & Trimless Downlight

A-FDR22055



9W

4-6

A-FDR22075



12W

4-7

A-FDR22100



25W

4-8

Find/Focas for Recessed Spotlight


A-DR42052



7W

5-1

A-DR42052T



7W

5-2


A-DR42090-1



12W

5-3

A-DR42090-2



12W×2

5-4

A-DR42115-1



25W

5-5

A-DR42115-2



25W×2

5-6

Slimmer for Recessed Linear Downlight & Spotlight

A-DS1103S



4W

6-1

A-DS1106S



8W

6-2


A-DS1112S



15W

6-3

A-DS1102



4W

6-4

A-DS1105



10W

6-5

A-DS1110



20W

6-6


A-DS1115



30W

6-7

A-DS3202



4W

6-8


A-DS3205



10W

6-9

A-DS3210



20W

6-10



INDOOR INDEX

Moon for Linear Wall Washer

A-DS1105W



10W

7-1

A-DS1110W



20W

7-2


A-DS1115W



30W

7-3

A-LR3836WA



24W

7-4

A-LS2835WA




24W

7-5

Shadow for Spotlight


A-TL12038



7W

8-1


A-TL12063



12W

8-2

A-SP22038



7W

8-3

A-SP22063



12W

8-4

A-SS22038



7W

8-5

A-SS22063




12W

8-6

Skime/Skyme for Surface Mounted Downlight & Spotlight

A-SD11075



12W

9-1

A-SD11095



18W

9-2

A-SD11115



25W

9-3

A-SD51075-1



10W

9-4

A-SD51075-2



10W×2

9-5


A-SD51075-3



10W×3

9-6


A-SD32097-1



15W

9-7


A-SD32097-2



15W×2

9-8

A-SD42070



9W

9-9


A-SD42100



15W

9-10


A-SD42070S



9W

9-11

A-SD42100S




15W

9-12

Walat/Opton/Mars for Wall Light

A-RWL1087



3W

10-1

A-RWL2065



3W

10-2

A-RWL3070A



3W

10-3


A-RWL3080B



3W

10-4

A-RWL4115



3W

10-5

A-RWL4115S



3W

10-6



Skyfall for Recessed Module Downlight



Features

- 1.LED **Module** solution with easy replacement
- 2.Various lens(**10°/15°/24°/38°/50°**),reflector and accessories
- 3.MR16 solution and **trimless** solution available
- 4.Uniform light,**softer transition** and **no spill light** with **darklight** reflector
- 5.Pin hole and oval hole with **matt black reflector**
- 6.IP rating:IP20 and **IP44**
- 7.UGR<10 and **cut-off angle**>**40°**

Power: 9W/15W/20W/35W

CCT: 2700K/3000K/4000K/5000K/6500K/2700K-6000K Tunable

Beam angle: 10°/15°/24°/36°/50°

Lumen output: 525lm-2800lm@3000K

Driver: Non-dim/Triac/1-10V/DALI

Cut-out: Dia58/75/100/125mm


Finishing color: White/Black

IP rating: IP20/IP44


Accessories




Replacement

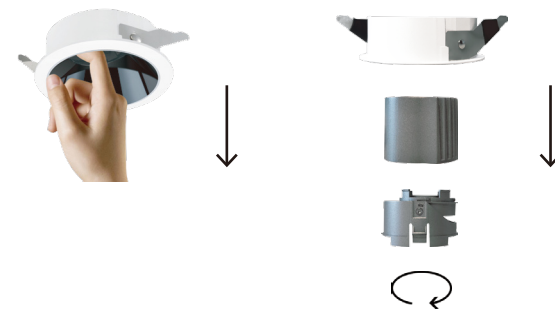

Light Performance(Unit square: 500*500mm)

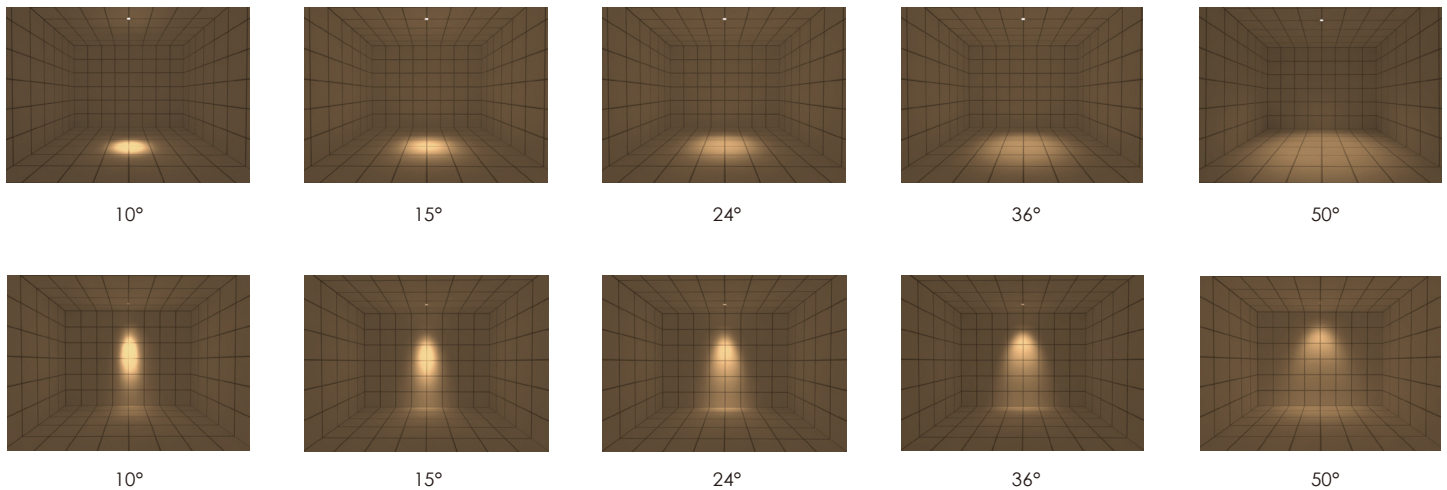

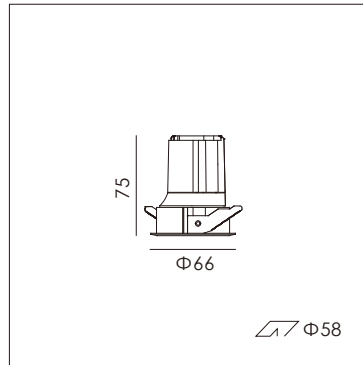

Power: 9W@36V/200mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°/50°

Lumen output: 525lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Silver/Mirror Black/Matt Black




Size: Dia66×H75mm

Cut-out: Dia58mm




IP rating: IP20/IP44



Photometric Data

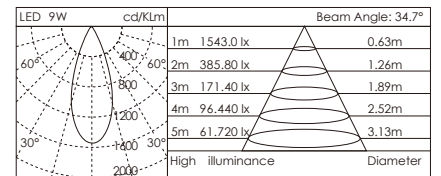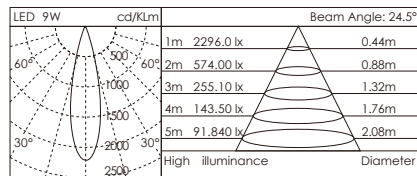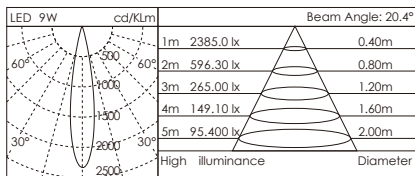


Light Performance

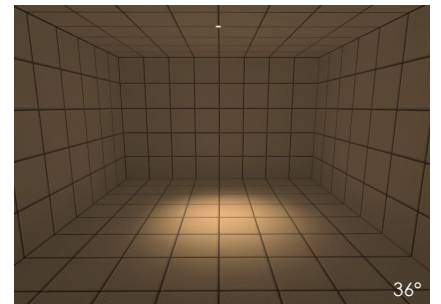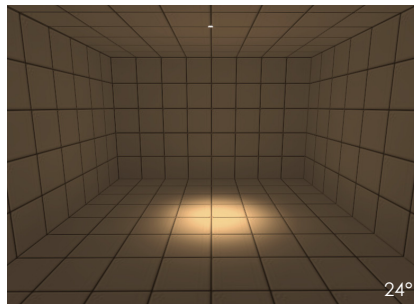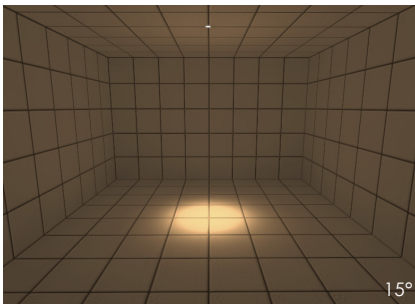

Ordering Part No.

A-DR11058-9W-ND-15D-930-WH-R1-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR11058	9W	ND Non Dim	15D 15°	930 90&3000K	WH White	R1 Mirror Silver	L1 Oval lens	IP44
A-DR11058T (Trimless)		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R2 Mirror Black	F1 Amber filter	IP20 blank
		VD 1-10V Dim	36D 36°	830 80&3000K		R3 Mirror Gold		
		DD DALI Dim	50D 50°	840 80&4000K				

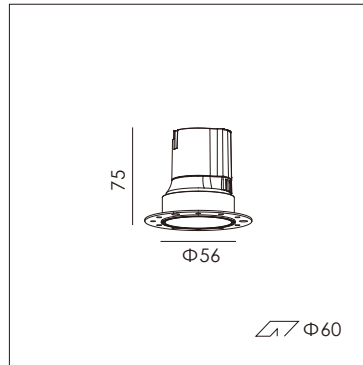

Power: 9W@36V/200mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°/50°

Lumen output: 525lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Silver/Mirror Black/Matt Black




Size: Dia56×H75mm

Cut-out: Dia60mm




IP rating: IP20/IP44



Photometric Data

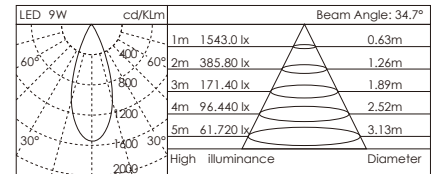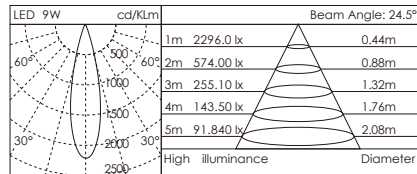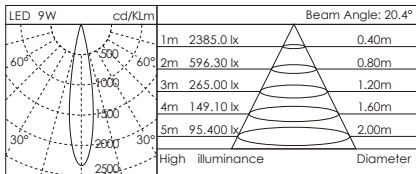


Light Performance

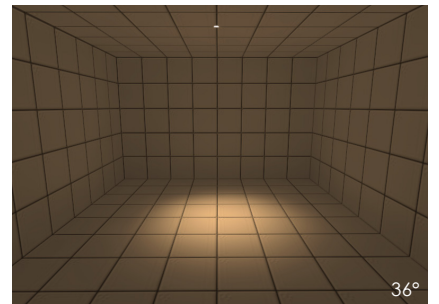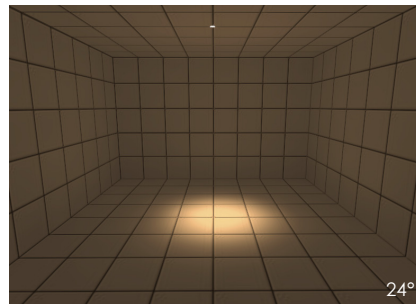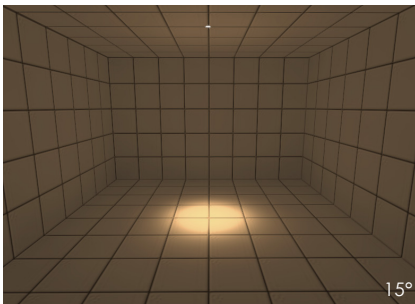

Ordering Part No.

A-DR11058T-9W-ND-15D-930-WH-R1-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR11058	9W	ND Non Dim	15D 15°	930 90&3000K	WH White	R1 Mirror Silver	L1 Oval lens	IP44
A-DR11058T (Trimless)		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R2 Mirror Black	F1 Amber filter	IP20 blank
		VD 1-10V Dim	36D 36°	830 80&3000K		R3 Mirror Gold		
		DD DALI Dim	50D 50°	840 80&4000K				

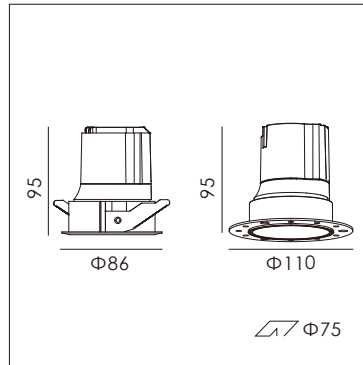

Power: 12W@36V/300mA / 15W@36V/350mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 10°/15°/24°/36°/50°

Lumen output: 1000lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Silver/Mirror Black/Matt Black




Size: Dia86×H95mm

Cut-out: Dia75mm




IP rating: IP20/IP44



Photometric Data

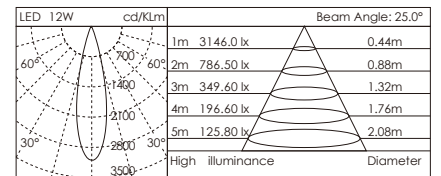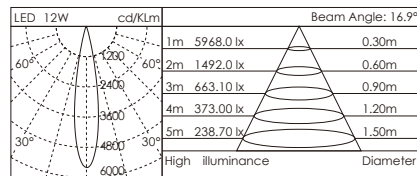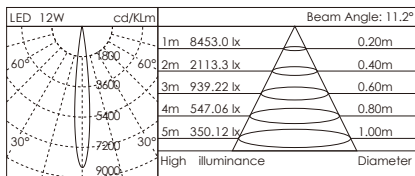


Light Performance

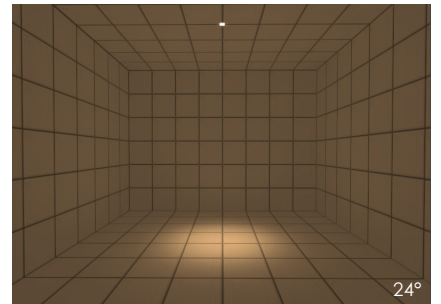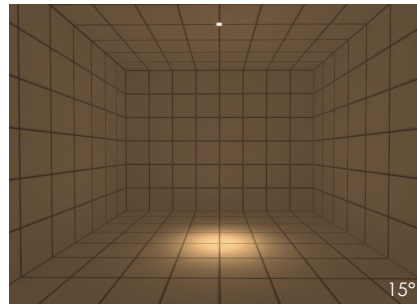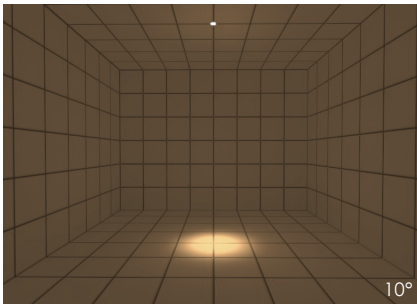

Ordering Part No.

A-DR11075-12W-ND-15D-930-WH-R1-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR11075	12W	ND Non Dim	15D 15°	930 90&3000K	WH White	R1 Mirror Silver	L1 Oval lens	IP44
A-DR11075M (MR16)	15W	TD Triac Dim	24D 24°	940 90&4000K	BK Black	R2 Mirror Black	F1 Amber filter	IP20 blank
A-DR11075T (Trimless)		VD 1-10V Dim	36D 36°	830 80&3000K		R3 Mirror Gold		
		DD DALI Dim	50D 50°	840 80&4000K				

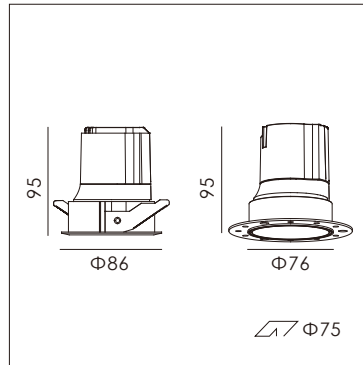

Power: 12W@36V/300mA / 15W@36V/350mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 10°/15°/24°/36°/50°

Lumen output: 810lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Matt Black (Pin Hole: Dia30mm)

Size: Dia86×H95mm

Cut-out: Dia75mm

IP rating: IP20/IP44



Oval lens
L1



Flood lens
L2



Honeycomb
L3



Amber filter
F1






Blue filter
F2






Red filter
F3

Photometric Data

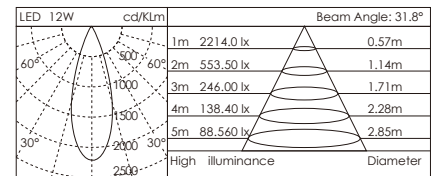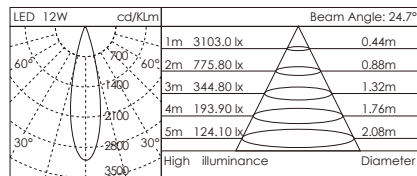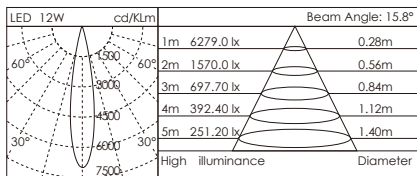


Light Performance

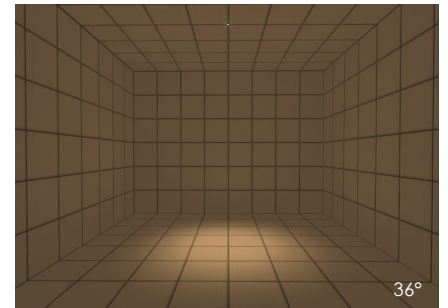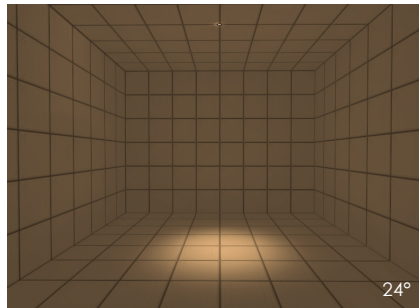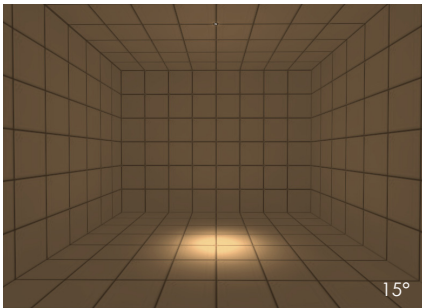

Ordering Part No.

A-DR11075A-12W-ND-15D-930-WH-R5-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR11075A	12W	ND Non Dim	15D 15°	930 90&3000K	WH White	R5 Matt Black	L1 Oval lens	IP44
A-DR11075AT (Trimless)	15W	TD Triac Dim	24D 24°	940 90&4000K	BK Black		F1 Amber filter	IP20 blank
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim	50D 50°	840 80&4000K				

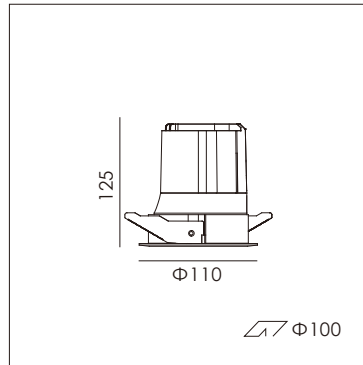

Power: 20W@36V/500mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°/50°

Lumen output: 1400lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Silver/Mirror Black/Matt Black




Size: Dia110×H125mm

Cut-out: Dia100mm




IP rating: IP20/IP44



Photometric Data

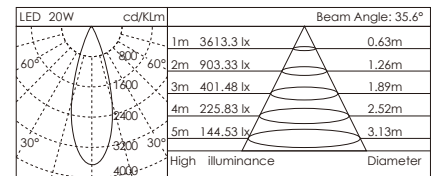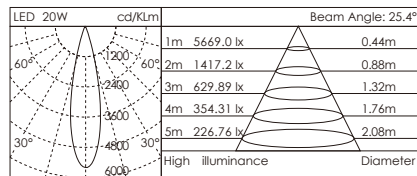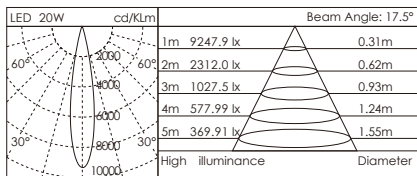


Light Performance

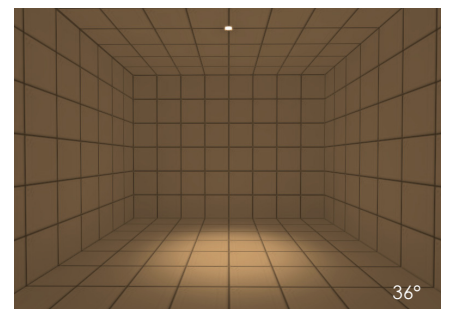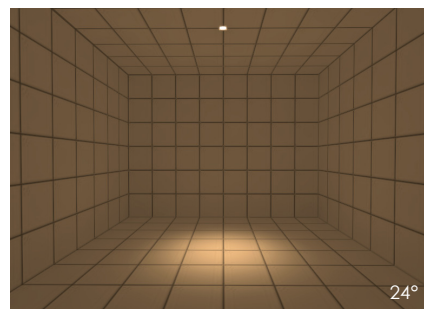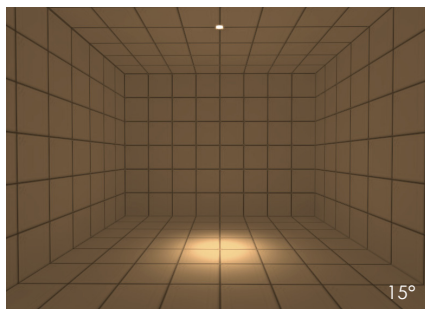

Ordering Part No.

A-DR11100-20W-ND-15D-930-WH-R1-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR11100	20W	ND Non Dim	15D 15°	930 90&3000K	WH White	R1 Mirror Silver	L1 Oval lens	IP44
A-DR11100T (Trimless)		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R2 Mirror Black	F1 Amber filter	IP20 blank
		VD 1-10V Dim	36D 36°	830 80&3000K		R3 Mirror Gold		
		DD DALI Dim	50D 50°	840 80&4000K				

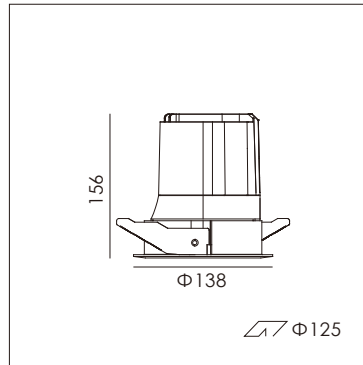

Power: 35W@36V/900mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°/50°

Lumen output: 2800lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Silver/Mirror Black/Matt Black




Size: Dia138×H156mm

Cut-out: Dia125mm




IP rating: IP20/IP44



Photometric Data

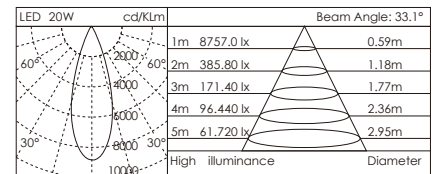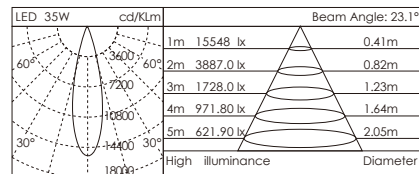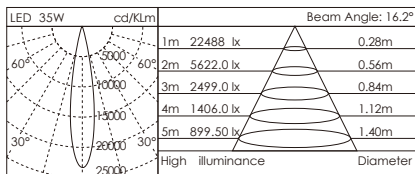

Light Performance

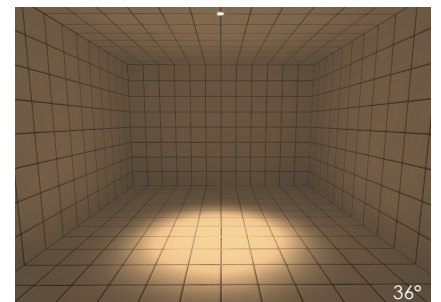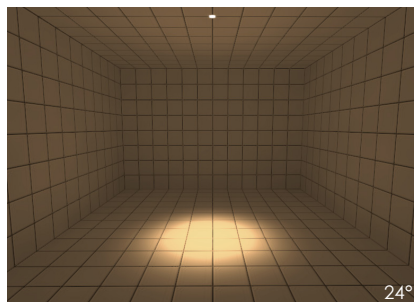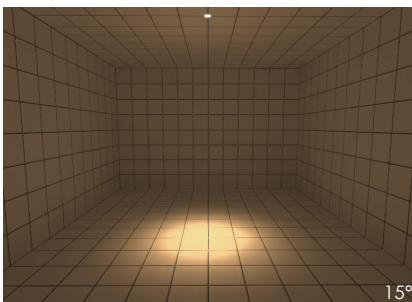


Ordering Part No.

A-DR1125-35W-ND-15D-930-WH-R1-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR11125	35W	ND Non Dim	15D 15°	930 90&3000K	WH White	R1 Mirror Silver	L1 Oval lens	IP44
A-DR11125T (Trimless)		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R2 Mirror Black	F1 Amber filter	IP20 blank
		VD 1-10V Dim	36D 36°	830 80&3000K		R3 Mirror Gold		
		DD DALI Dim	50D 50°	840 80&4000K				

Skyfall for Recessed Adjustable Downlight

A-DR12058

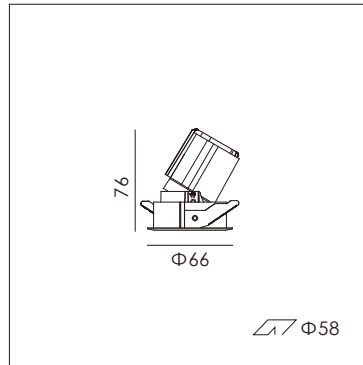

Power: 9W@36V/200mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°/50°

Lumen output: 525lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Silver/Mirror Black/Matt Black




Size: Dia66×H75mm

Cut-out: Dia58mm

IP rating: IP20/IP44





Photometric Data

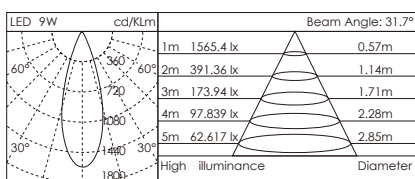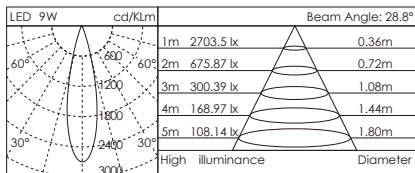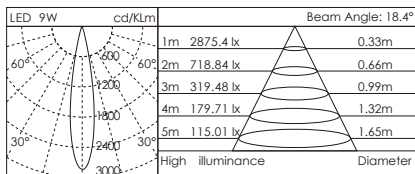

Ordering Part No.

A-DR12058-9W-ND-15D-930-WH-R1-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR12058	9W	ND Non Dim	15D 15°	930 90&3000K	WH White	R1 Mirror Silver	L1 Oval lens	IP44
A-DR12058T (Trimless)		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R2 Mirror Black	F1 Amber filter	IP20 blank
		VD 1-10V Dim	36D 36°	830 80&3000K		R3 Mirror Gold		
		DD DALI Dim	50D 50°	840 80&4000K				

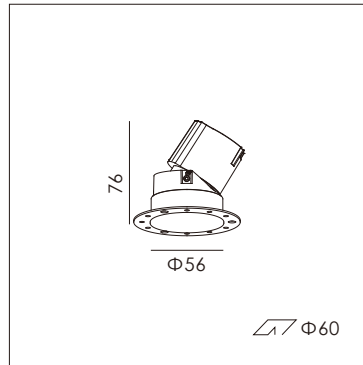

Power: 9W@36V/200mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°/50°

Lumen output: 525lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Silver/Mirror Black/Matt Black




Size: Dia56×H76mm

Cut-out: Dia60mm

IP rating: IP20/IP44





Photometric Data

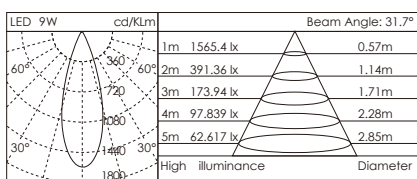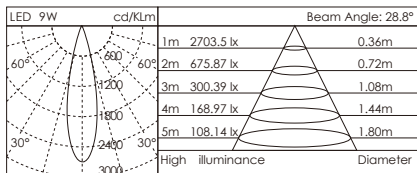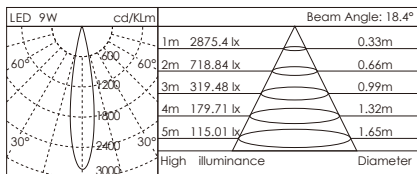

Ordering Part No.

A-DR12058T-9W-ND-15D-930-WH-R1-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR12058	9W	ND Non Dim	15D 15°	930 90&3000K	WH White	R1 Mirror Silver	L1 Oval lens	IP44
A-DR12058T (Trimless)		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R2 Mirror Black	F1 Amber filter	IP20 blank
		VD 1-10V Dim	36D 36°	830 80&3000K		R3 Mirror Gold		
		DD DALI Dim	50D 50°	840 80&4000K				

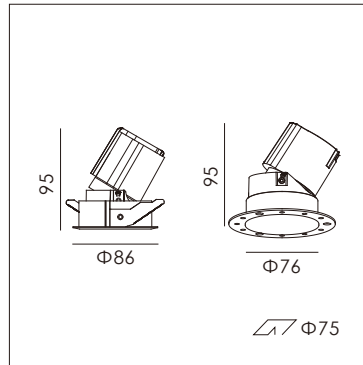

Power: 12W@36V/300mA / 15W@36V/350mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 10°/15°/24°/36°/50°

Lumen output: 1000lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Silver/Mirror Black/Matt Black

Size: Dia86×H95mm

Cut-out: Dia75mm

IP rating: IP20/IP44



Mirror Silver R1 Mirror Black R2 Mirror Gold R3



Oval lens L1 Flood lens L2 Honeycomb L3






Matt Silver R4 Matt Black R5 Matt White R6






Amber filter F1 Blue filter F2 MR16 solution SH-DR12075M

Photometric Data

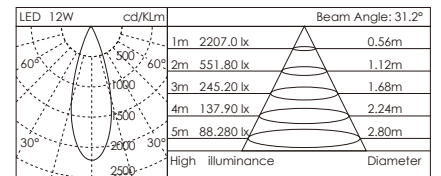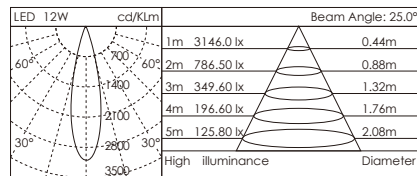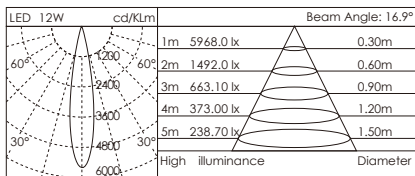



Light Performance

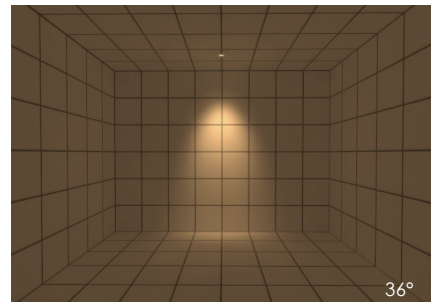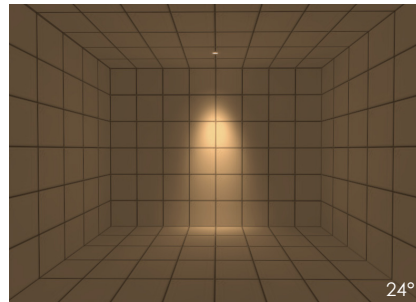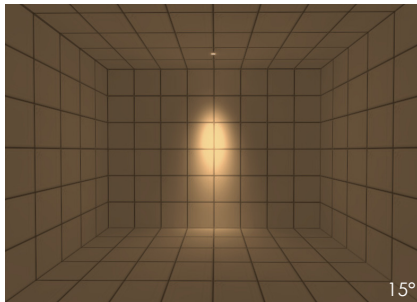

Ordering Part No.

A-DR12075-12W-ND-15D-930-WH-R1-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR12075	12W	ND Non Dim	15D 15°	930 90&3000K	WH White	R1 Mirror Silver	L1 Oval lens	IP44
A-DR12075M (MR16)	15W	TD Triac Dim	24D 24°	940 90&4000K	BK Black	R2 Mirror Black	F1 Amber filter	IP20 blank
A-DR12075T (Trimless)		VD 1-10V Dim	36D 36°	830 80&3000K		R3 Mirror Gold		
		DD DALI Dim	50D 50°	840 80&4000K				

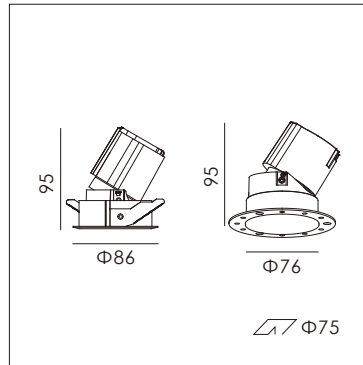

Power: 12W@36V/300mA / 15W@36V/350mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 10°/15°/24°/36°/50°

Lumen output: 810lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum


Finishing color: White/Black

Reflector color: Matt Black

Size: Dia86×H95mm

Cut-out: Dia75mm

IP rating: IP20/IP44






Oval lens L1 Flood lens L2 Honeycomb L3






Amber filter F1 Blue filter F2 Red filter F3

Photometric Data

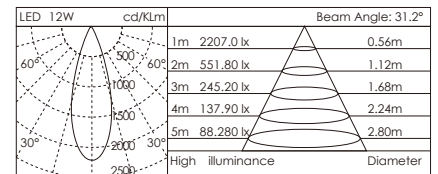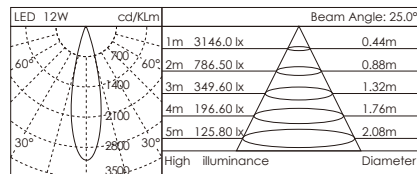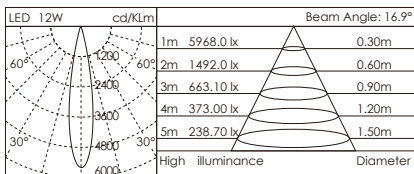



Light Performance

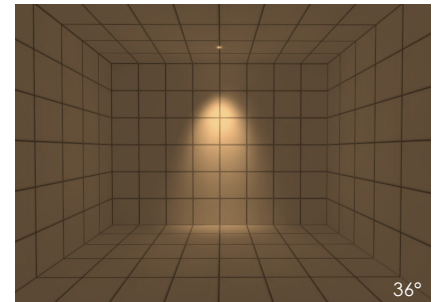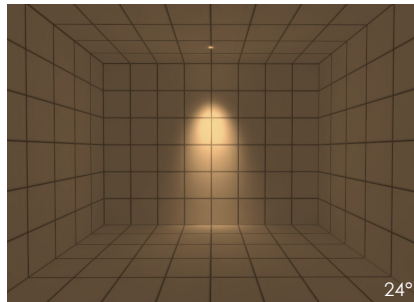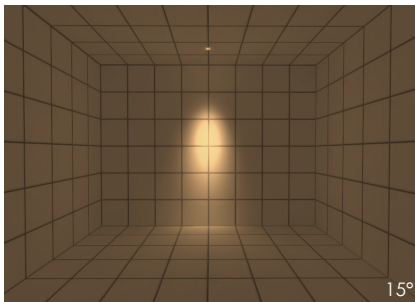

Ordering Part No.

A-DR12075B-12W-ND-15D-930-WH-R1-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR12075B	12W	ND Non Dim	15D 15°	930 90&3000K	WH White	R1 Mirror Silver	L1 Oval lens	IP44
A-DR12075BM (MR16)	15W	TD Triac Dim	24D 24°	940 90&4000K	BK Black	R2 Mirror Black	F1 Amber filter	IP20 blank
A-DR12075BT (Trimless)		VD 1-10V Dim	36D 36°	830 80&3000K		R3 Mirror Gold		
		DD DALI Dim	50D 50°	840 80&4000K				

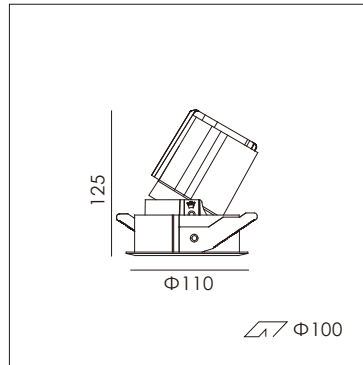

Power: 20W@36V/500mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°/50°

Lumen output: 1400lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Silver/Mirror Black/Matt Black




Size: Dia110×H125mm

Cut-out: Dia100mm




IP rating: IP20/IP44



Photometric Data

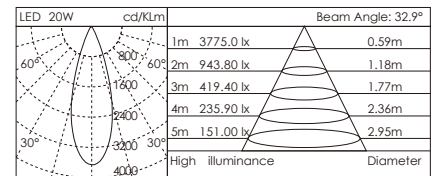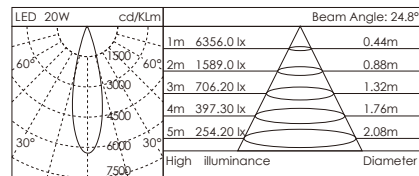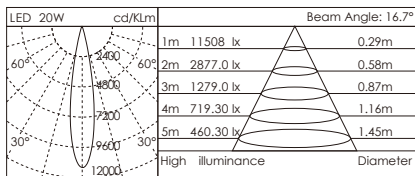



Light Performance

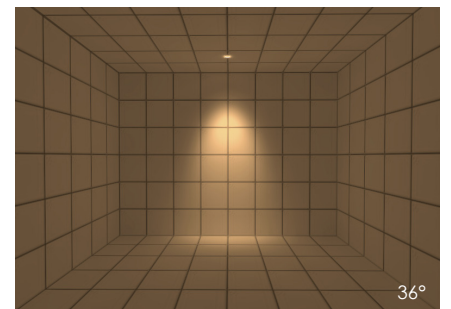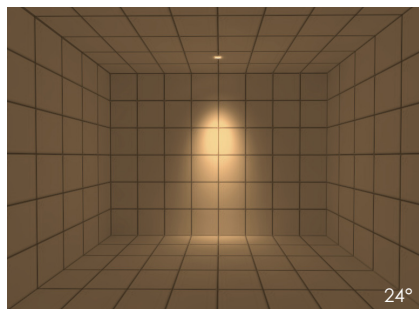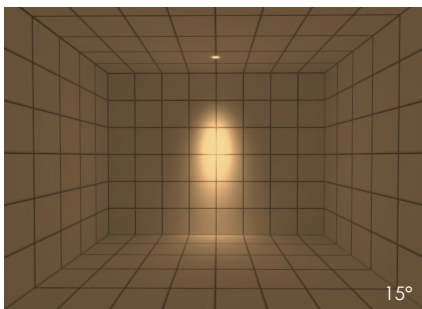

Ordering Part No.

A-DR12100-20W-ND-15D-930-WH-R1-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR12100	20W	ND Non Dim	15D 15°	930 90&3000K	WH White	R1 Mirror Silver	L1 Oval lens	IP44
A-DR12100T (Trimless)		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R2 Mirror Black	F1 Amber filter	IP20 blank
		VD 1-10V Dim	36D 36°	830 80&3000K		R3 Mirror Gold		
		DD DALI Dim	50D 50°	840 80&4000K				

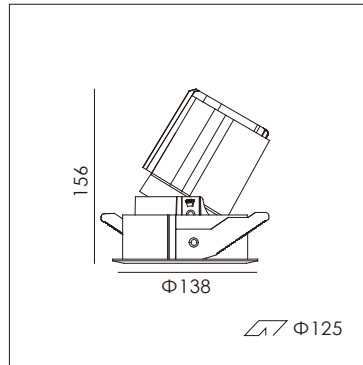

Power: 35W@36V/900mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°/50°

Lumen output: 2800lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Silver/Mirror Black/Matt Black




Size: Dia138×H153mm

Cut-out: Dia125mm




IP rating: IP20/IP44



Photometric Data

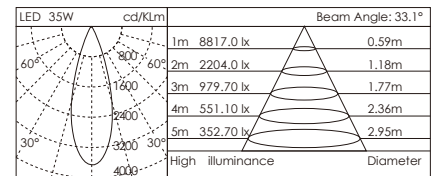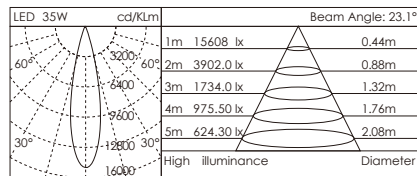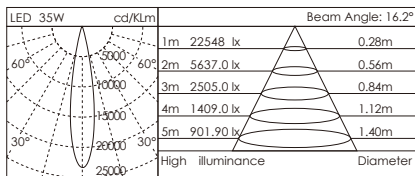

Light Performance

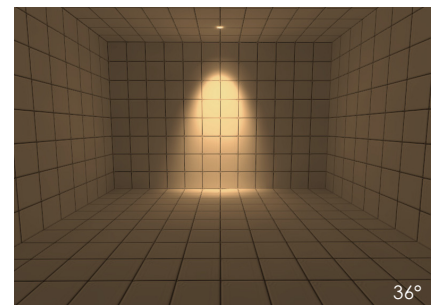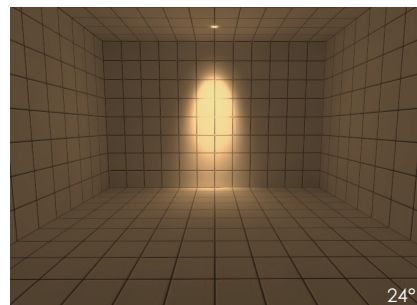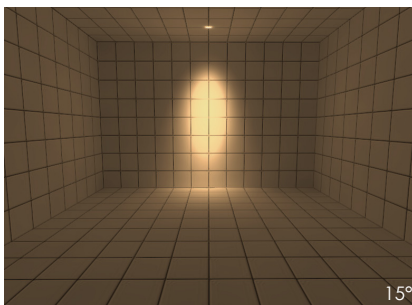


Ordering Part No.

A-DR12125-35W-ND-15D-930-WH-R1-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR12125	35W	ND Non Dim	15D 15°	930 90&3000K	WH White	R1 Mirror Silver	L1 Oval lens	IP44
A-DR12125T (Trimless)		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R2 Mirror Black	F1 Amber filter	IP20 blank
		VD 1-10V Dim	36D 36°	830 80&3000K		R3 Mirror Gold		
		DD DALI Dim	50D 50°	840 80&4000K				




Valo for Recessed Mini Downlight



Features


- 1. Mini size design
- 2. Various lens(8°/15°/24°/36°), reflectors and accessories
- 3. IP rating: IP20 and **IP44**
- 4. Uniform light performance


Accessories

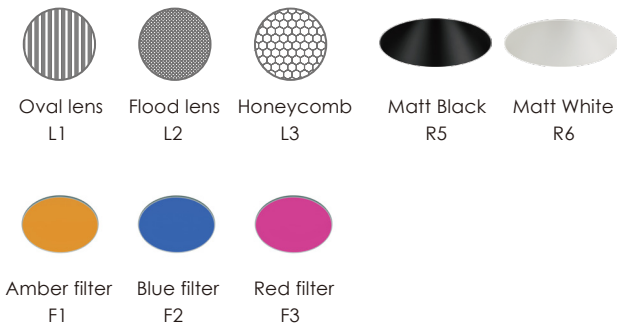

Power: 1.5W/3W/5W
CCT: 2700K/3000K/4000K/5000K/6500K
CRI: 80/90
Beam angle: 8°/15°/24°/36°
Lumen output: 90lm-330lm@3000K
Input voltage: AC 220-240V
Driver: Non-dim/Triac/1-10V/DALI
Cut-out: Dia30/40/50mm
Size: Dia36×H43/Dia46×H50mm/Dia56×H64mm
Finishing color: White/Black
Reflector color: Matt White/Matt Black
IP rating: IP20/IP44

Light Performance(Unit square: 500*500mm)

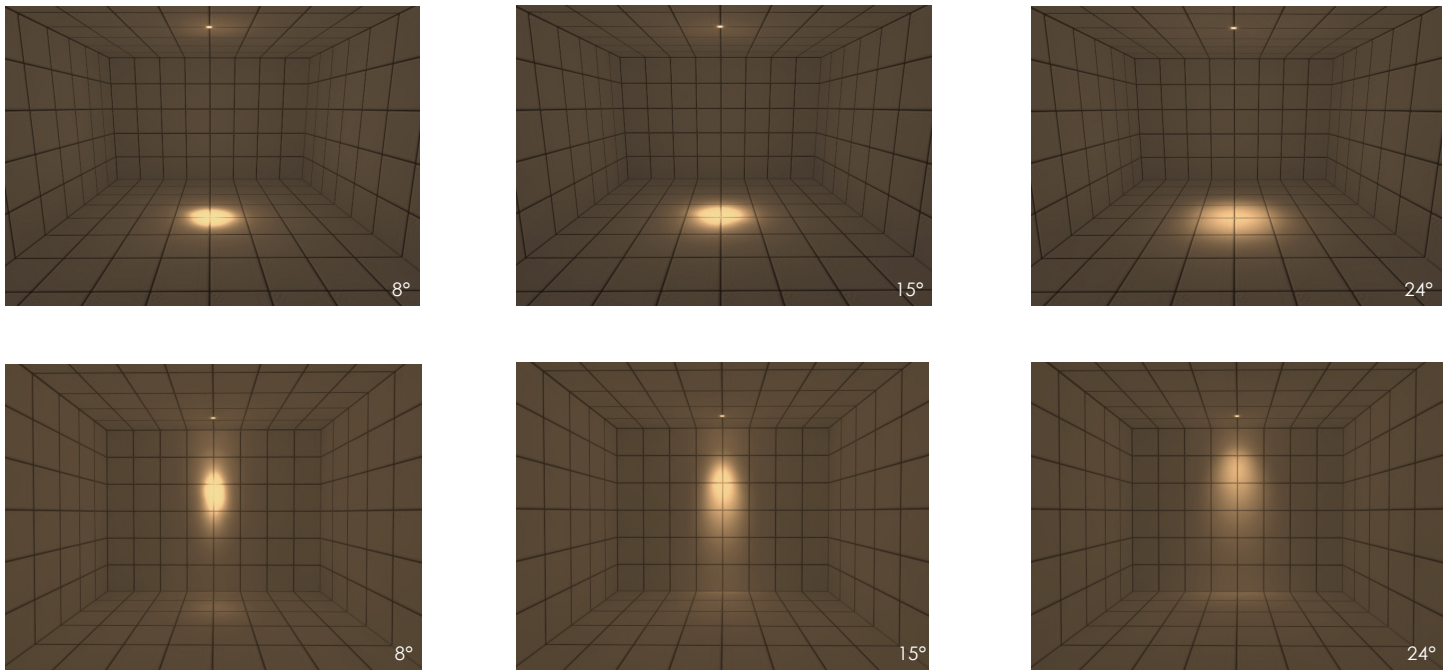

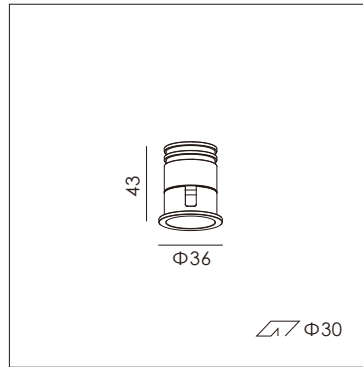

Power: 1.5W@3V/350mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 8/15/24°

Lumen output: 90lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Matt White/Matt Black


Size: Dia36×H43mm

Cut-out: Dia30mm

IP rating: IP20/IP44



Matt Black R5
Matt White R6






Oval lens L1
Flood lens L2
Honeycomb L3






Amber filter F1
Blue filter F2
Red filter F3

Photometric Data

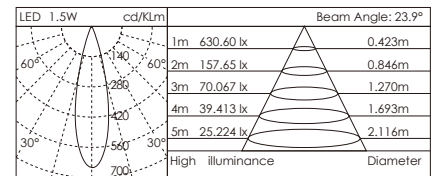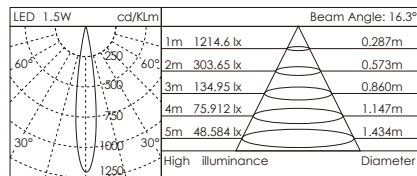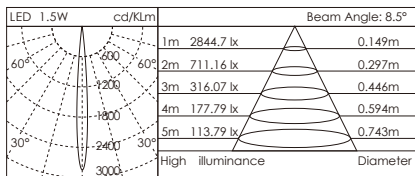


Light Performance

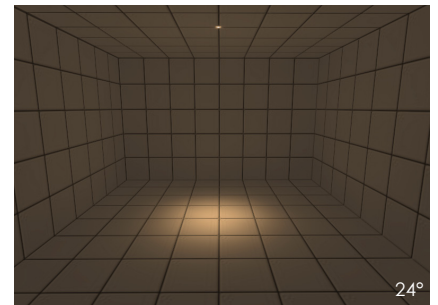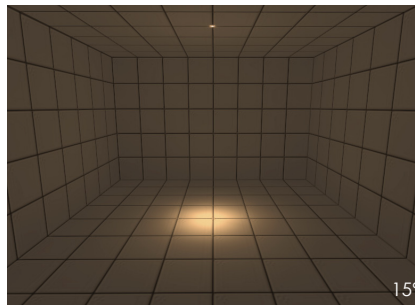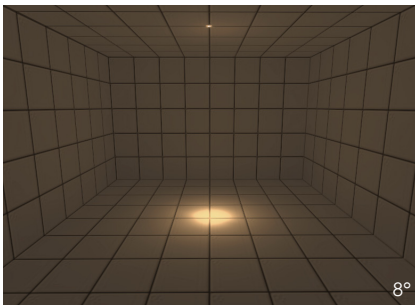

Ordering Part No.

A-DR21030-1.5W-ND-8D-930-WH-R5-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR21030	1.5W	ND Non Dim	8D 8°	930 90&3000K	WH White	R5 Matt Black	L1 Oval lens	IP44
		TD Triac Dim	15D 15°	940 90&4000K	BK Black	R6 Matt White	F1 Amber filter	IP20 blank
		VD 1-10V Dim	24D 24°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

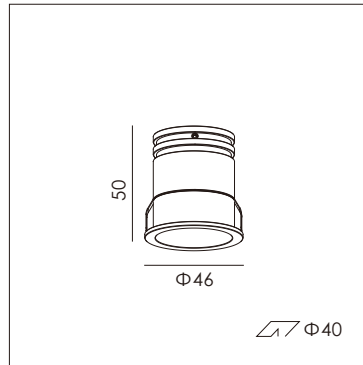

Power: 3W@3V/700mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 8/15/24/36°

Lumen output: 200lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Matt White/Matt Black


Size: Dia46×H50mm

Cut-out: Dia40mm

IP rating: IP20/IP44



Matt Black R5
Matt White R6






Oval lens L1
Flood lens L2
Honeycomb L3






Amber filter F1
Blue filter F2
Red filter F3

Photometric Data

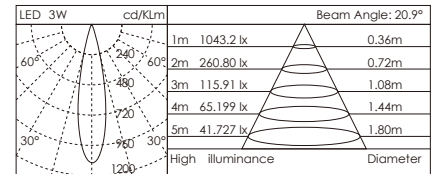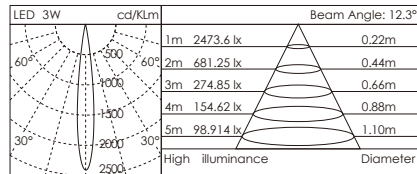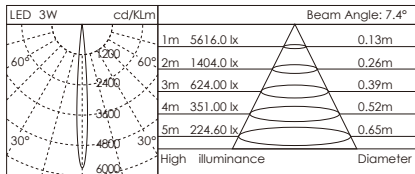

Light Performance

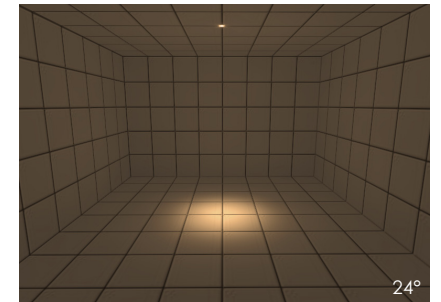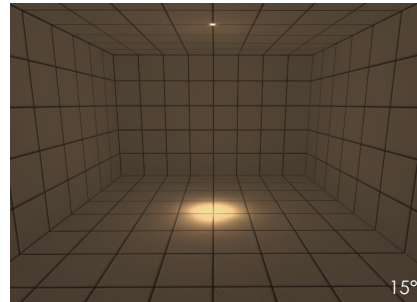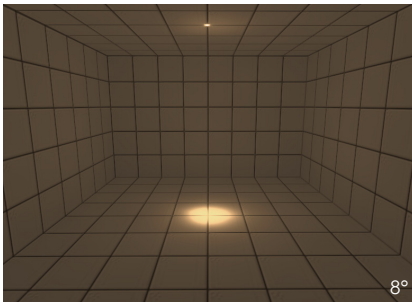


Ordering Part No.

A-DR21040-3W-ND-8D-930-WH-R5-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR21040	3W	ND Non Dim	8D 8°	930 90&3000K	WH White	R5 Matt Black	L1 Oval lens	IP44
		TD Triac Dim	15D 15°	940 90&4000K	BK Black	R6 Matt White	F1 Amber filter	IP20 blank
		VD 1-10V Dim	24D 24°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

Valo for Recessed Fixed Downlight

A-DR21050

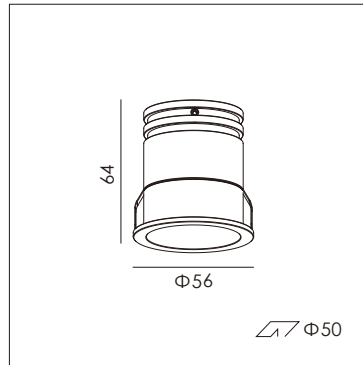

Power: 5W@3V/1050mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 8/15/24/36°

Lumen output: 330lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Matt White/Matt Black

Size: Dia56×H64mm

Cut-out: Dia50mm

IP rating: IP20/IP44



Matt Black
R5

Matt White
R6



Oval lens
L1



Flood lens
L2



Honeycomb
L3



Amber filter
F1






Blue filter
F2






Red filter
F3

Photometric Data

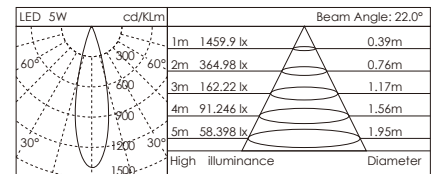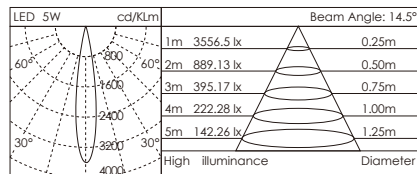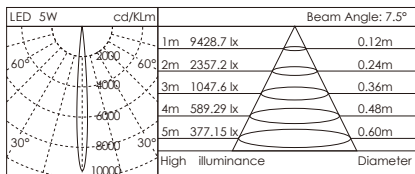

Light Performance

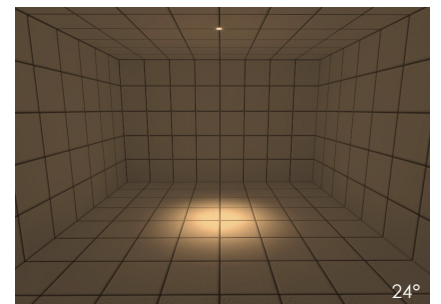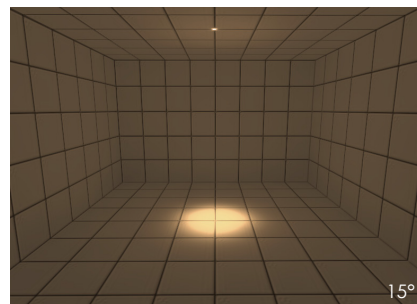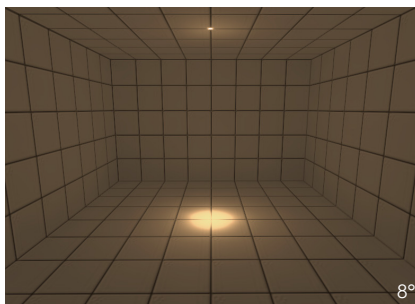

Ordering Part No.

A-DR21050-5W-ND-8D-930-WH-R5-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR21050	5W	ND Non Dim	8D 8°	930 90&3000K	WH White	R5 Matt Black	L1 Oval lens	IP44
		TD Triac Dim	15D 15°	940 90&4000K	BK Black	R6 Matt White	F1 Amber filter	IP20 blank
		VD 1-10V Dim	24D 24°	830 80&3000K				
		DD DALI Dim		840 80&4000K				



Power: 1.5W@3V/350mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15/24°

Lumen output: 90lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Matt White/Matt Black


Size: Dia36×H45mm

Cut-out: Dia30mm

IP rating: IP20/IP44



Matt Black R5
Matt White R6





Oval lens L1
Flood lens L2
Honeycomb L3





Amber filter F1
Blue filter F2
Red filter F3

Photometric Data

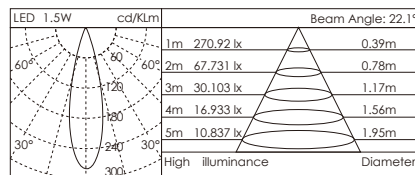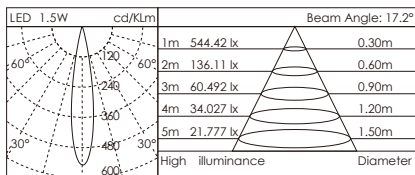

Light Performance

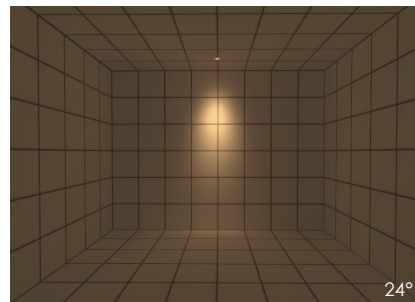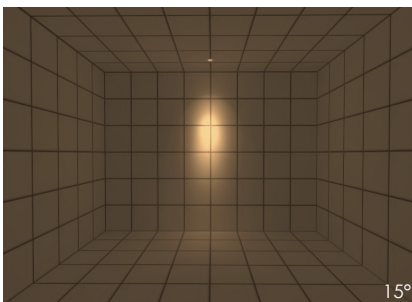


Ordering Part No.

A-DR22030-1.5W-ND-15D-930-WH-R5-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR22030	1.5W	ND Non Dim	15D 15°	930 90&3000K	WH White	R5 Matt Black	L1 Oval lens	IP44
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R6 Matt White	F1 Amber filter	IP20 blank
		VD 1-10V Dim		830 80&3000K				
		DD DALI Dim		840 80&4000K				

Valo for Recessed Adjustable Downlight

A-DR22040

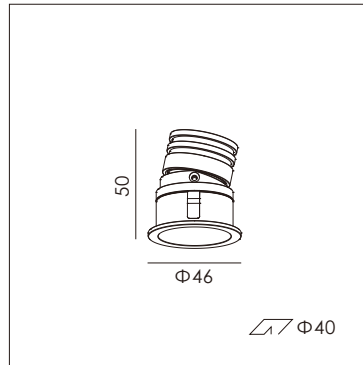

Power: 3W@3V/700mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 8/15/24°

Lumen output: 200lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Matt White/Matt Black


Size: Dia46×H50mm

Cut-out: Dia40mm

IP rating: IP20/IP44



Matt Black R5
Matt White R6






Oval lens L1
Flood lens L2
Honeycomb L3






Amber filter F1
Blue filter F2
Red filter F3

Photometric Data

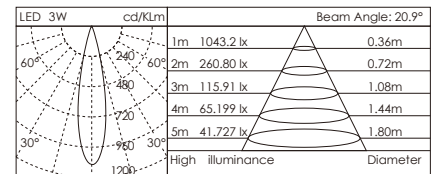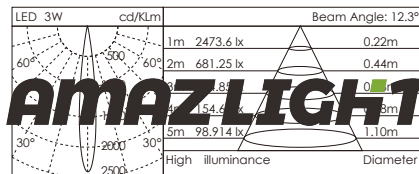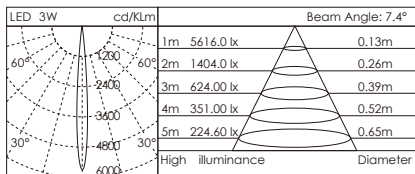


Light Performance

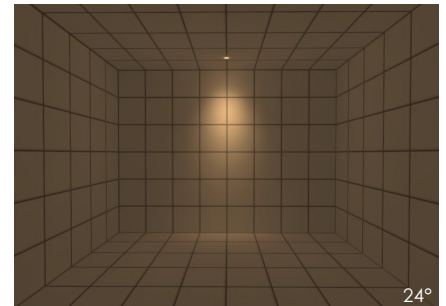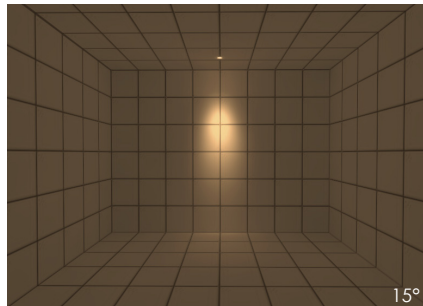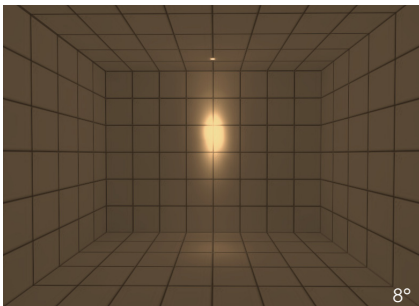

Ordering Part No.

A-DR22040-3W-ND-8D-930-WH-R5-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR22040	3W	ND Non Dim	8D 8°	930 90&3000K	WH White	R5 Matt Black	L1 Oval lens	IP44
		TD Triac Dim	15D 15°	940 90&4000K	BK Black	R6 Matt White	F1 Amber filter	IP20 blank
		VD 1-10V Dim	24D 24°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

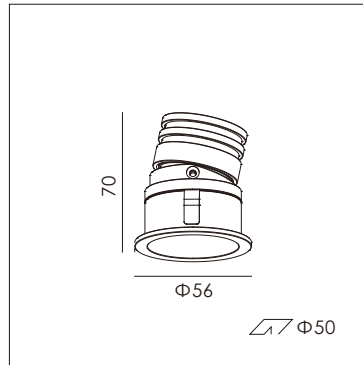

Power: 5W@3V/1050mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 8/15/24/36°

Lumen output: 330lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Matt White/Matt Black


Size: Dia56×H70mm

Cut-out: Dia50mm

IP rating: IP20/IP44



Matt Black R5
Matt White R6






Oval lens L1
Flood lens L2
Honeycomb L3






Amber filter F1
Blue filter F2
Red filter F3

Photometric Data

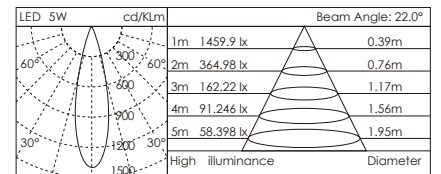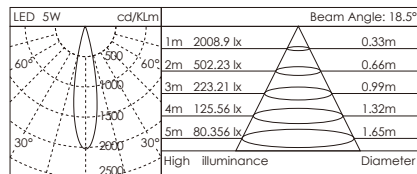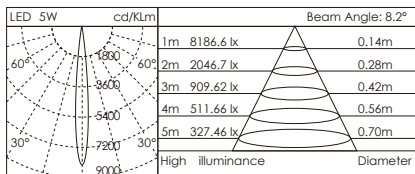

Light Performance

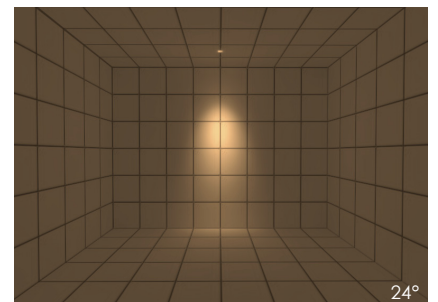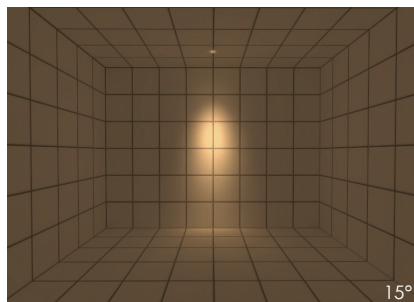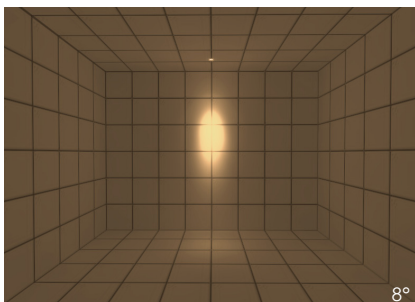


Ordering Part No.

A-DR22050-5W-ND-8D-930-WH-R5-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR22050	5W	ND Non Dim	8D 8°	930 90&3000K	WH White	R5 Matt Black	L1 Oval lens	IP44
		TD Triac Dim	15D 15°	940 90&4000K	BK Black	R6 Matt White	F1 Amber filter	IP20 blank
		VD 1-10V Dim	24D 24°	830 80&3000K				
		DD DALI Dim		840 80&4000K				




Vali for Recessed Mini Downlight

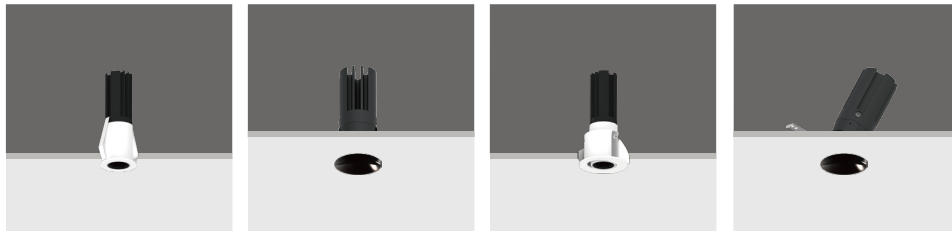

Features

1. Mini size design and high power
2. Various lens(10°/15°/24°/36°), reflectors and accessories
3. **Trimless** solution
4. Uniform light performance

Accessories

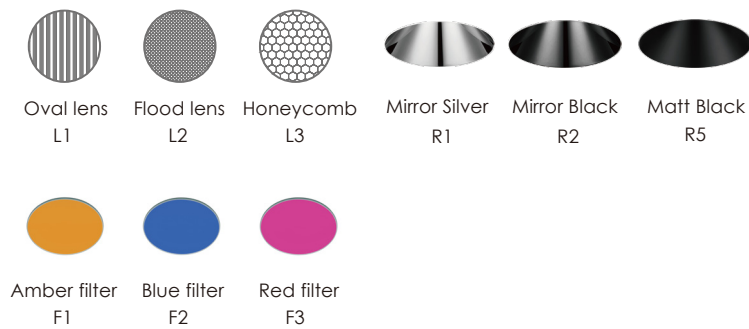

Power: 6W/9W

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 8°/15°/24°/36°

Lumen output: 360lm-540lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Cut-out: Dia25/35/50mm







Size: Dia30×H80mm/Dia40×H80mm/Dia56×H100mm



Finishing color: White/Black

Reflector color: Mirror Silver/Mirror Black/Matt Black

IP rating: IP20

Light Performance(Unit square: 500*500mm)

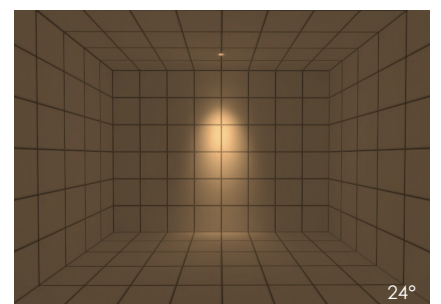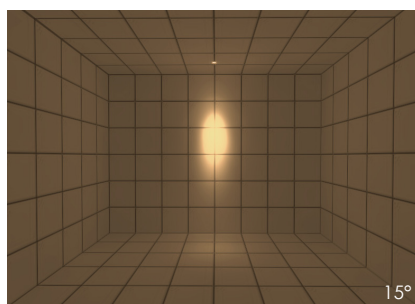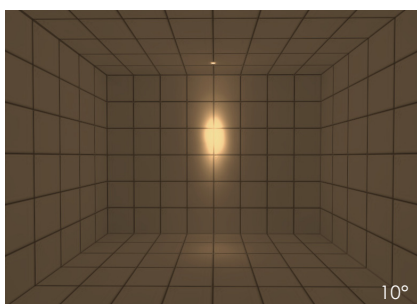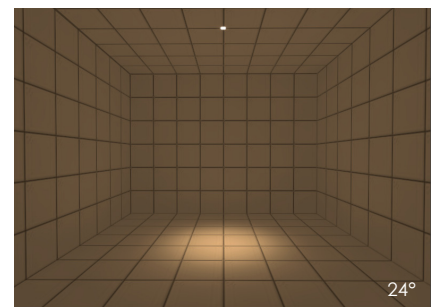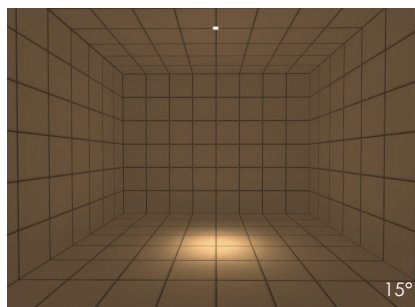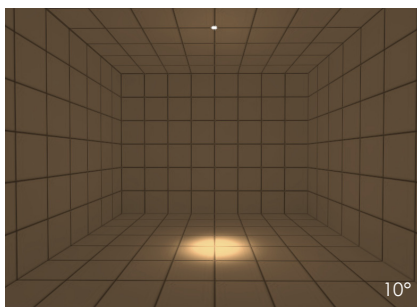

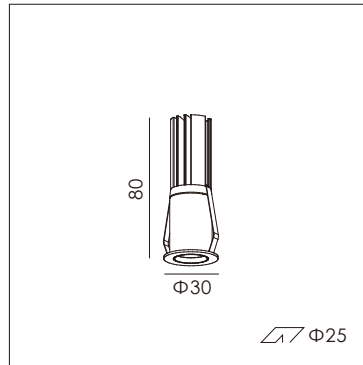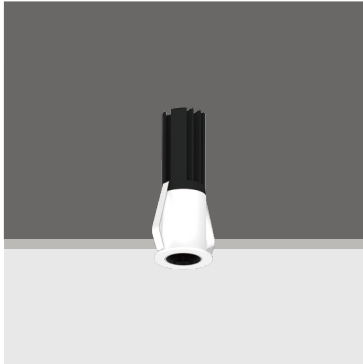

Power: 6W@3V/1350mA

CCT: 2700K/3000K/3500K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 10°/15°/24°

Lumen output: 360lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Black/Matt Black


Size: Dia30×H80mm

Cut-out: Dia25mm

IP rating: IP20/IP44



Mirror Black R2
Matt Black R5






Oval lens L1
Flood lens L2
Honeycomb L3






Amber filter F1
Blue filter F2
Red filter F3

Photometric Data

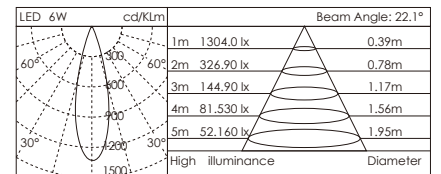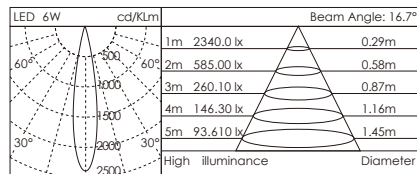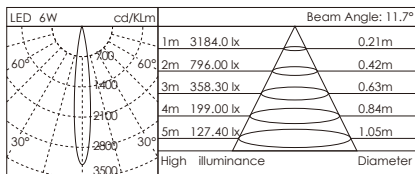


Light Performance

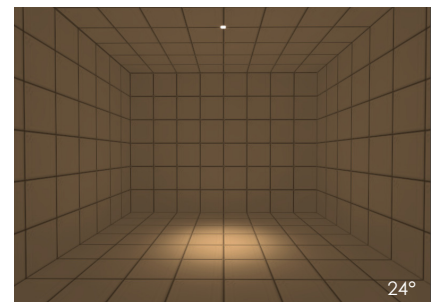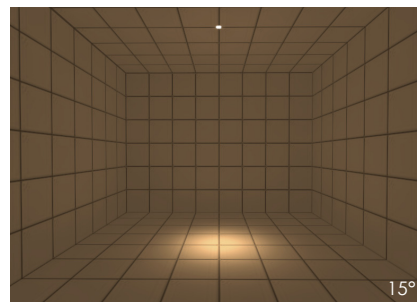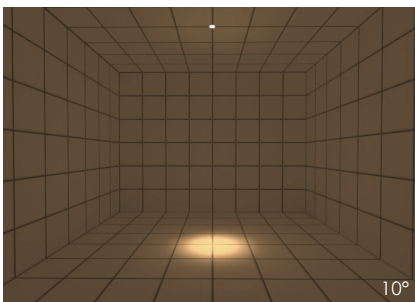

Ordering Part No.

A-DR23025-6W-ND-15D-930-WH-R1-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR23025	6W	ND Non Dim	10D 10°	930 90&3000K	WH White	R2 Mirror Black	L1 Oval lens	IP20 blank
		TD Triac Dim	15D 15°	940 90&4000K	BK Black	R5 Matt Black	F1 Amber filter	IP44
		VD 1-10V Dim	24D 24°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

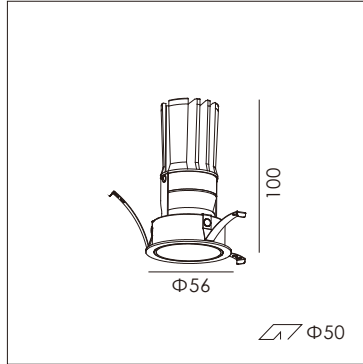

Power: 9W@36V/200mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 540lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Black/Matt Black




Size: Dia56×H100mm

Cut-out: Dia50mm




IP rating: IP20/IP44



Photometric Data

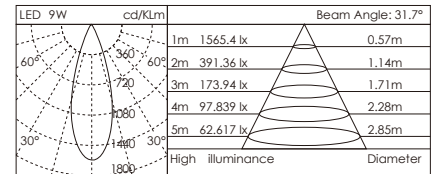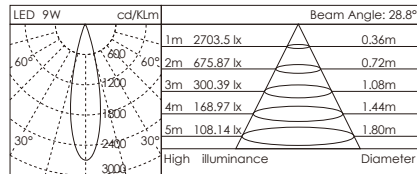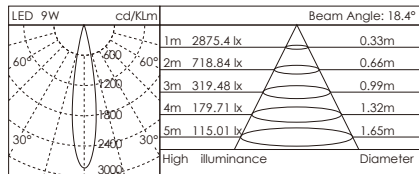


Light Performance

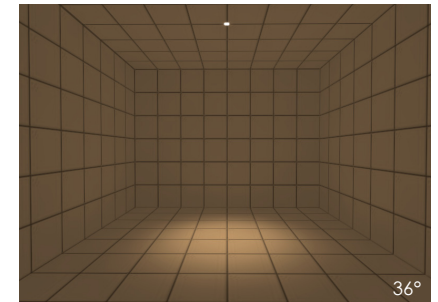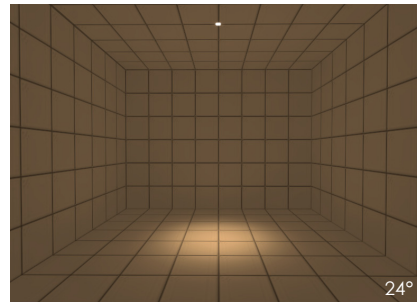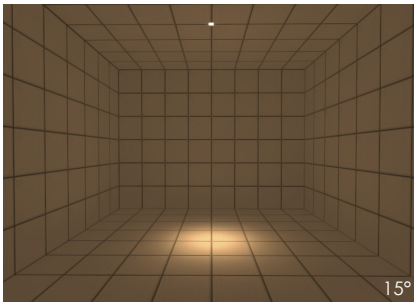

Ordering Part No.

A-DR23050-9W-ND-15D-930-WH-R1-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR23050	9W	ND Non Dim	15D 15°	930 90&3000K	WH White	R2 Mirror Black	L1 Oval lens	IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R5 Matt Black	F1 Amber filter	IP44
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

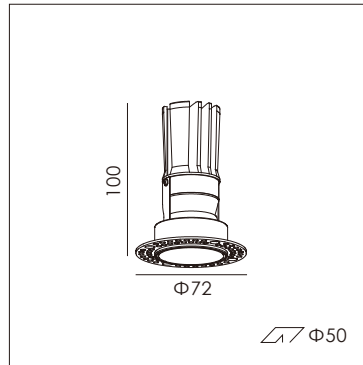

Power: 9W@36V/200mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 540lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Black/Matt Black


Size: Dia72×H100mm

Cut-out: Dia50mm

IP rating: IP20/IP44



Mirror Black R2
Matt Black R5






Oval lens L1
Flood lens L2
Honeycomb L3






Amber filter F1
Blue filter F2
Red filter F3

Photometric Data

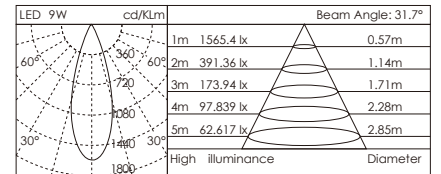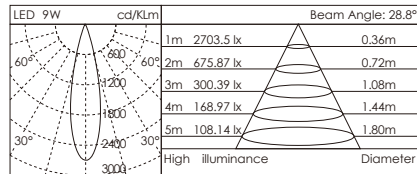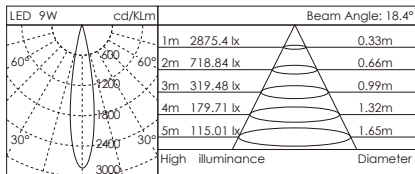



Light Performance

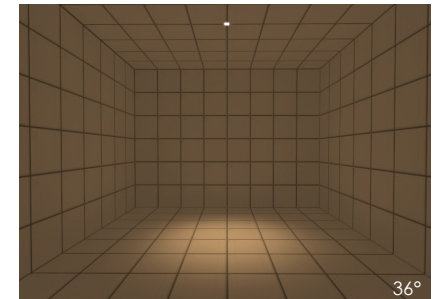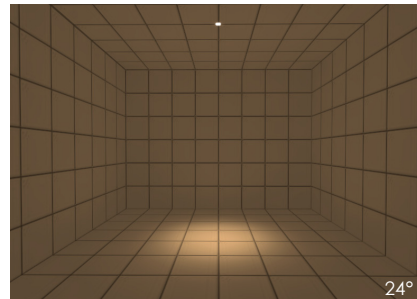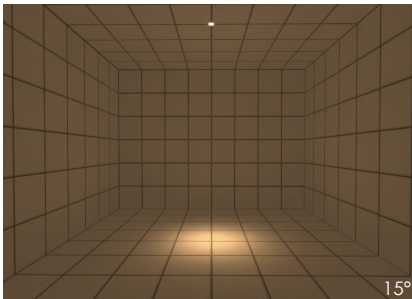

Ordering Part No.

A-DR23050T-9W-ND-15D-930-WH-R1-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR23050T	9W	ND Non Dim	15D 15°	930 90&3000K	WH White	R2 Mirror Black	L1 Oval lens	IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R5 Matt Black	F1 Amber filter	IP44
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

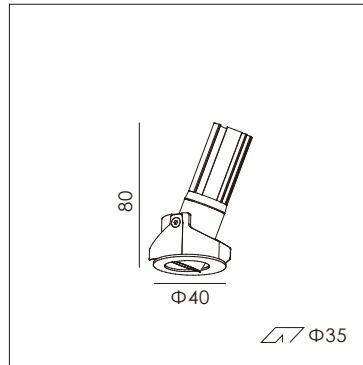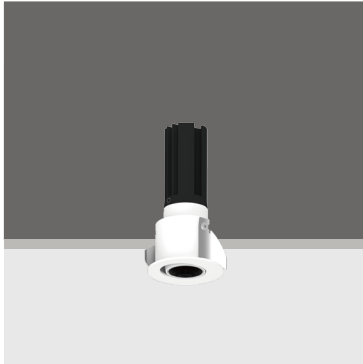

Power: 6W@3V/1350mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 10°/15°/24°

Lumen output: 360lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Black/Matt Black


Size: Dia40×H80mm

Cut-out: Dia35mm

IP rating: IP20



Mirror Black R2
Matt Black R5






Oval lens L1
Flood lens L2
Honeycomb L3






Amber filter F1
Blue filter F2
Red filter F3

Photometric Data

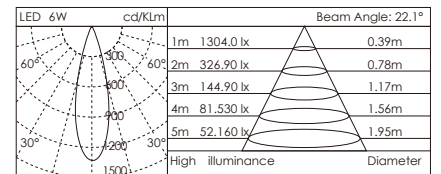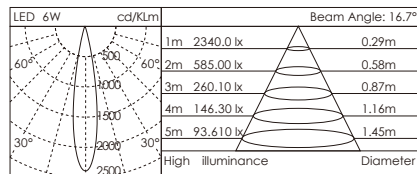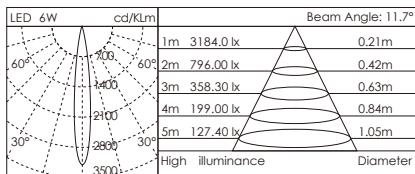

Light Performance

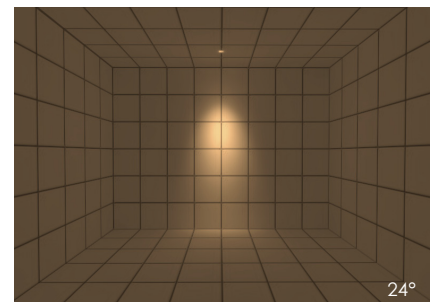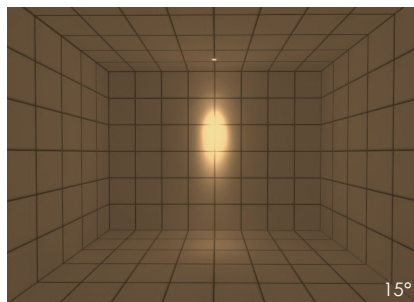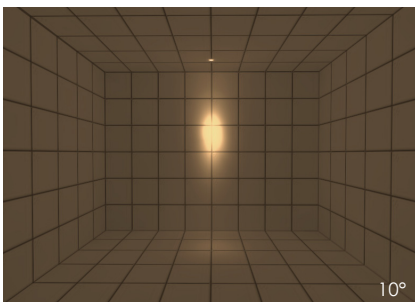



Ordering Part No.

A-DR24035-6W-ND-10D-930-WH-R1-L1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR24035	6W	ND Non Dim	10D 10°	930 90&3000K	WH White	R2 Mirror Black	L1 Oval lens	IP20 blank
		TD Triac Dim	15D 15°	940 90&4000K	BK Black	R5 Matt Black	F1 Amber filter	
		VD 1-10V Dim	24D 24°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

Vali for Recessed Adjustable Downlight

A-DR24050

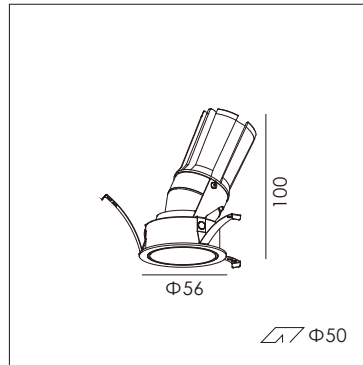

Power: 9W@36V/200mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 540lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Black/Matt Black


Size: Dia56×H100mm

Cut-out: Dia50mm

IP rating: IP20



Mirror Black R2 Matt Black R5






Oval lens L1 Flood lens L2 Honeycomb L3






Amber filter F1 Blue filter F2 Red filter F3

Photometric Data

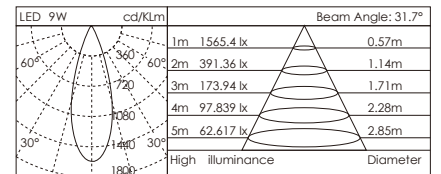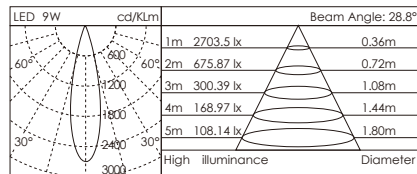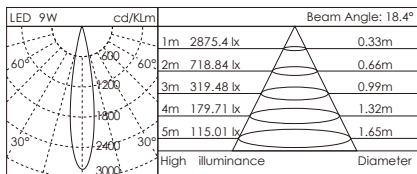



Light Performance

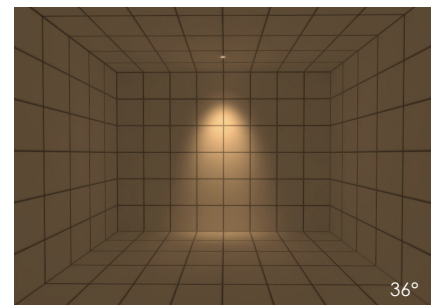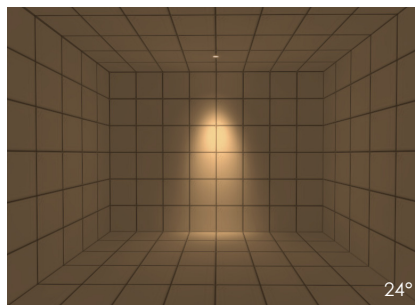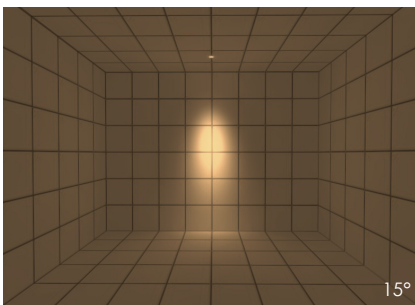

Ordering Part No.

A-DR24050-9W-ND-15D-930-WH-R1-L1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR24050	9W	ND Non Dim	15D 15°	930 90&3000K	WH White	R2 Mirror Black	L1 Oval lens	IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R5 Matt Black	F1 Amber filter	
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

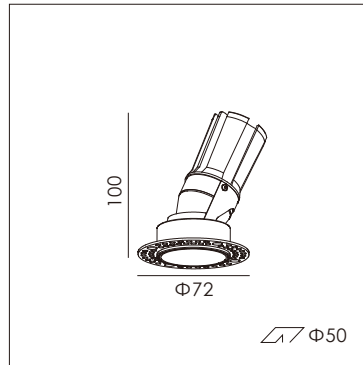

Power: 9W@36V/200mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 540lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Black/Matt Black


Size: Dia72×H100mm

Cut-out: Dia50mm

IP rating: IP20



Mirror Black R2
Matt Black R5






Oval lens L1
Flood lens L2
Honeycomb L3






Amber filter F1
Blue filter F2
Red filter F3

Photometric Data

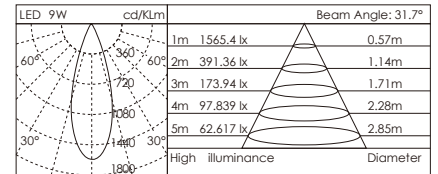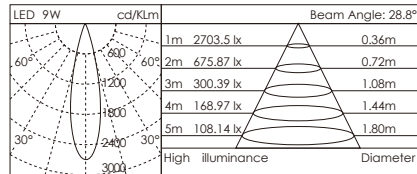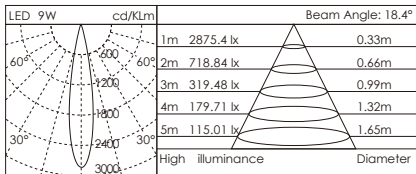

Light Performance

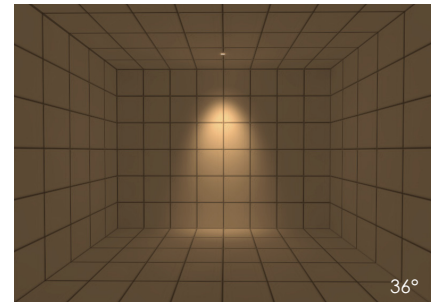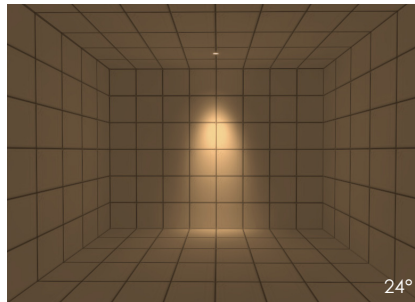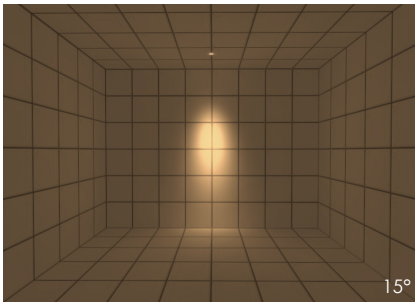


Ordering Part No.

A-DR24050-9W-ND-15D-930-WH-R1-L1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR24050T	9W	ND Non Dim	15D 15°	930 90&3000K	WH White	R2 Mirror Black	L1 Oval lens	IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R5 Matt Black	F1 Amber filter	
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				



Luna for Recessed Downlight & Wall Washer

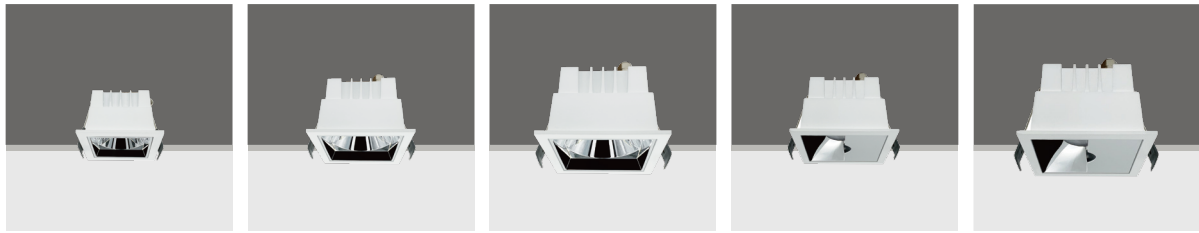

Features


- 1.Integrated structure design for better heat radiation
- 2.Various beam angle **15°/24°/36°/Asymmetric** wall wash
- 3.Cut-off angle >30°
- 4.Uniform light performance

Accessories




Power: 7W/12W/18W
CCT: 2700K/3000K/4000K/5000K/6500K
CRI: 80/90
Beam angle: 15°/24°/36°/WW
Lumen output: 550lm-1500lm@3000K
Input voltage: AC 220-240V
Driver: Non-dim/Triac/1-10V/DALI
Cut-out: 55×55mm/75×75mm/95×95mm
Size: 66×66×H55mm/86×86×H72mm/110×110×H81mm
Finishing color: White/Black
Reflector color: Mirror Silver/Mirror Black
IP rating: IP20

Light Performance(Unit square: 500*500mm)

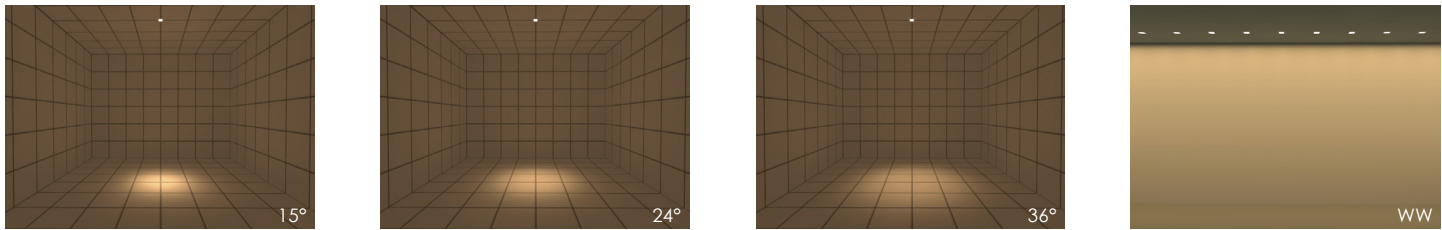




Light Arrangement for wall washer

SH-FDR11075W Power:12W

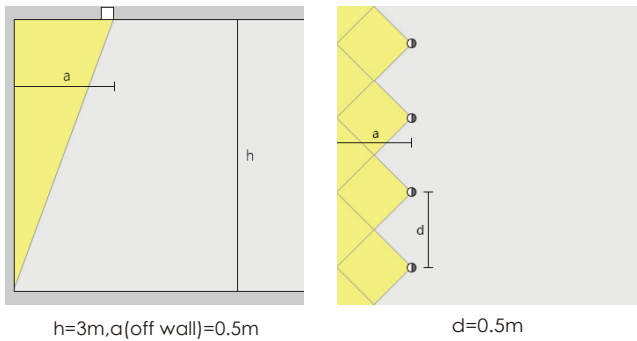

SH-FDR11095W Power:18W

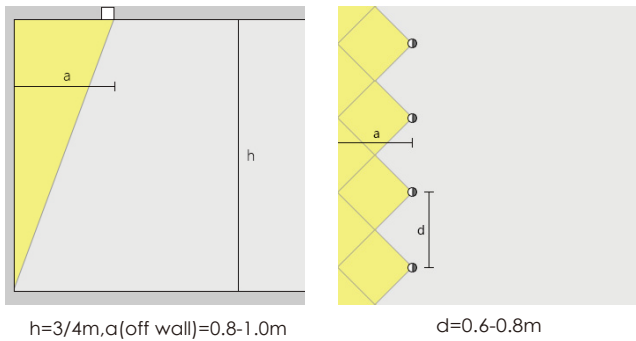

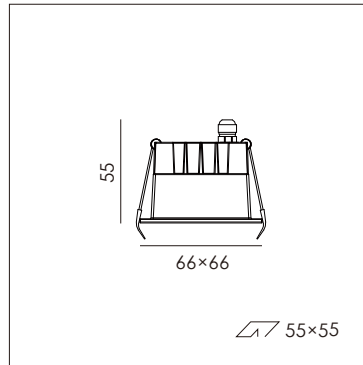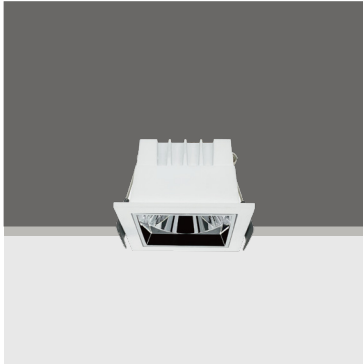

Power: 7W@36V/160mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 680lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Silver/Mirror Black

Size: 66×66×H55mm

Cut-out: 55×55mm




IP rating: IP20






Mirror Silver
R1

Mirror Black
R2

Photometric Data

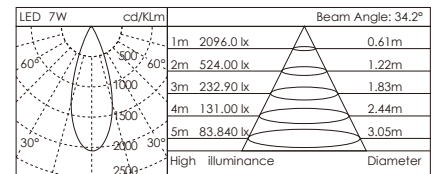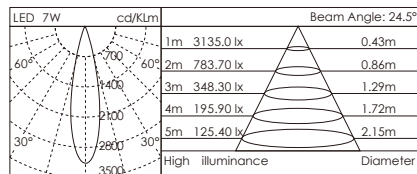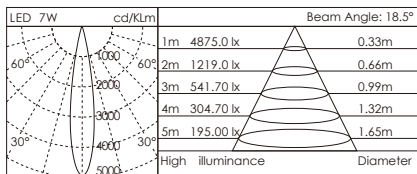



Light Performance

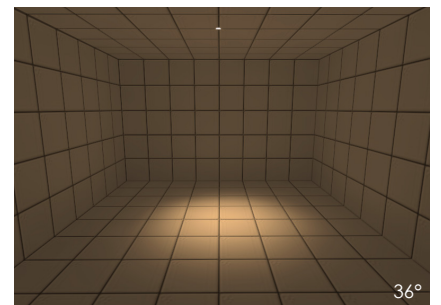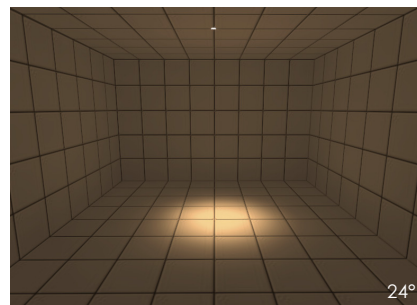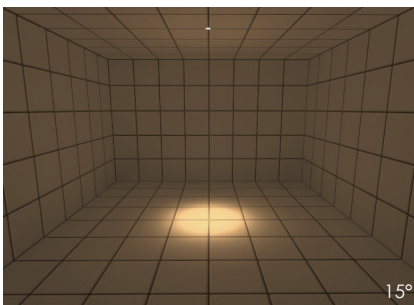

Ordering Part No.

A-FDR11055-7W-ND-15D-930-WH-R1-L1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-FDR11055	7W	ND Non Dim	15D 15°	930 90&3000K	WH White	R1 Mirror Silver	L1 Oval lens	IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R2 Mirror Black	F1 Amber filter	
		VD 1-10V Dim	36D 36°	830 80&3000K		R3 Mirror Gold		
		DD DALI Dim		840 80&4000K				

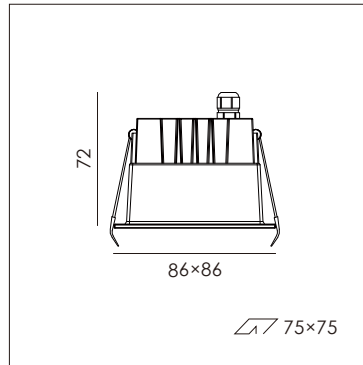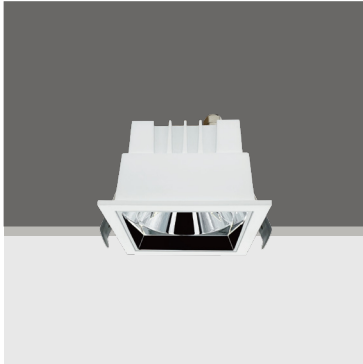

Power: 12W@36V/300mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 1100lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Silver/Mirror Black

Size: 86×86×H72mm

Cut-out: 75×75mm




IP rating: IP20






Mirror Silver
R1

Mirror Black
R2

Photometric Data

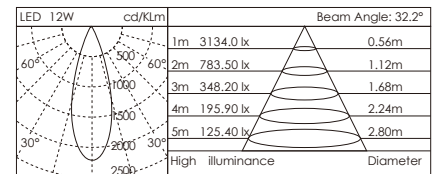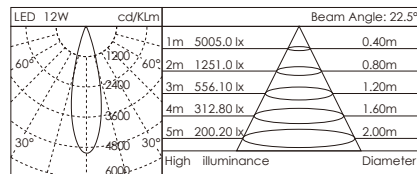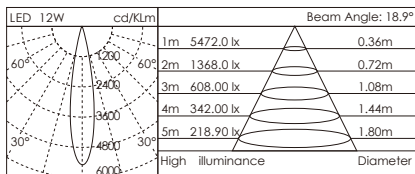


Light Performance

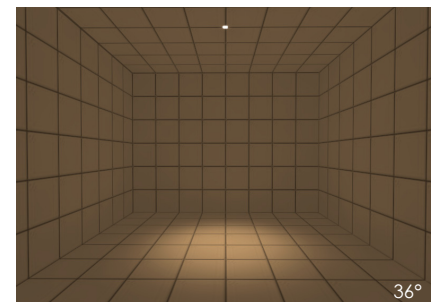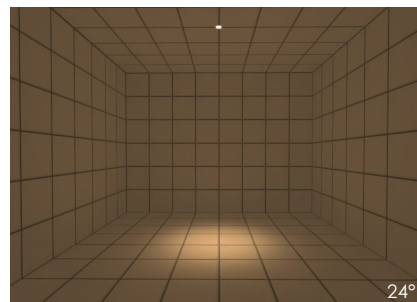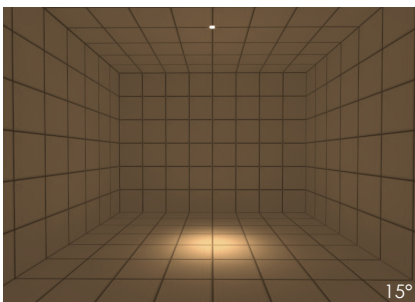

Ordering Part No.

A-FDR11075-12W-ND-15D-930-WH-R1-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-FDR11075	12W	ND Non Dim	15D 15°	930 90&3000K	WH White	R1 Mirror Silver	L1 Oval lens	IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R2 Mirror Black	F1 Amber filter	
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

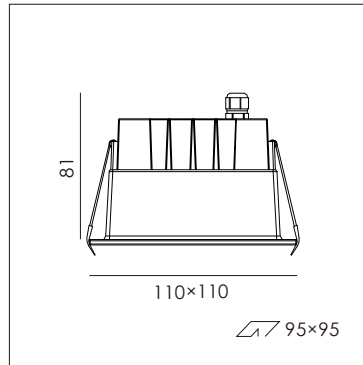

Power: 18W@36V/450mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 1500lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Silver/Mirror Black

Size: 110×110×H81mm




Cut-out: 95×95mm

IP rating: IP20






Mirror Silver R1 Mirror Black R2

Photometric Data

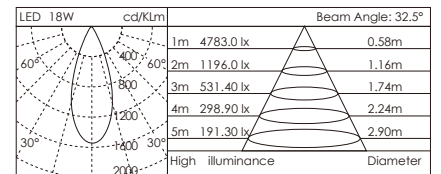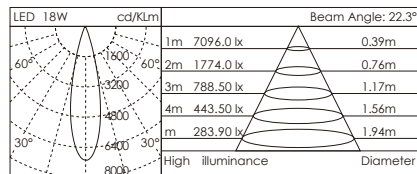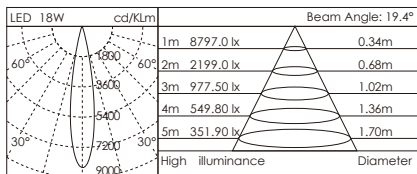



Light Performance

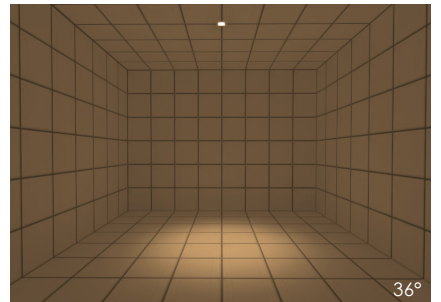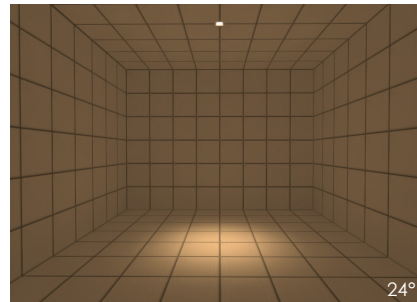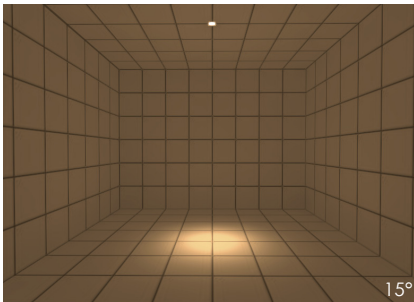

Ordering Part No.

A-FDR11095-18W-ND-15D-930-WH-R1-L1-IP44

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-FDR11095	18W	ND Non Dim	15D 15°	930 90&3000K	WH White	R1 Mirror Silver	L1 Oval lens	IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R2 Mirror Black	F1 Amber filter	
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

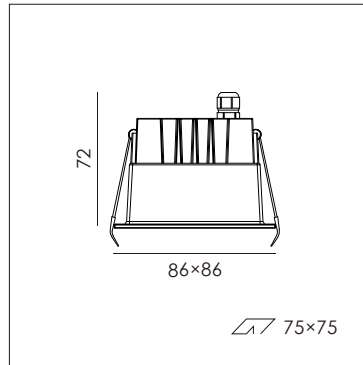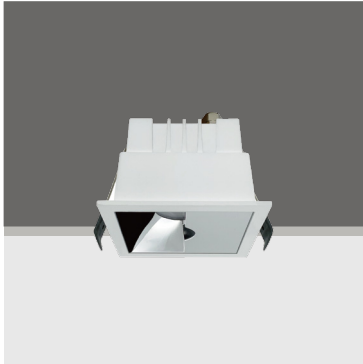

Power: 12W@36V/300mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: Asymmetric wall wash

Lumen output: 550lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Silver/Mirror Black

Size: 86×86×H72mm


Cut-out: 75×75mm

IP rating: IP20





Mirror Silver R1 Mirror Black R2


Photometric Data

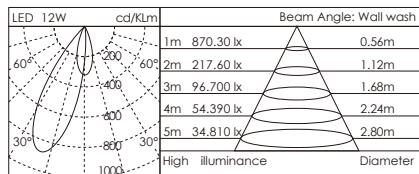

Light Performance

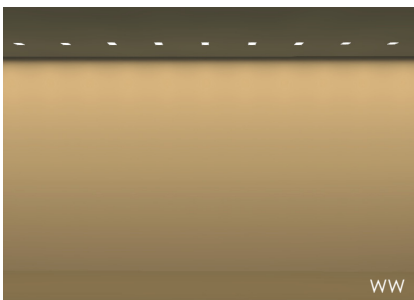

h=3m,a(off wall)=0.5m




d=0.5m

Ordering Part No.

A-FDR11075W-12W-ND-15D-930-WH-R1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-FDR11075W	12W	ND Non Dim	WW Wall wash	930 90&3000K	WH White	R1 Mirror Silver		IP20 blank
		TD Triac Dim		940 90&4000K	BK Black	R2 Mirror Black		
		VD 1-10V Dim		830 80&3000K				
		DD DALI Dim		840 80&4000K				

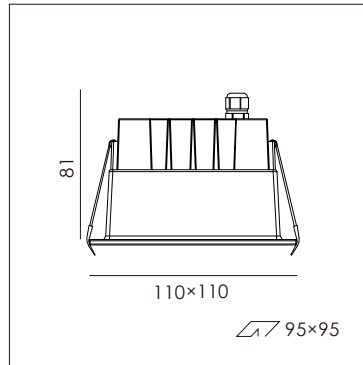

Power: 18W@36V/450mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: Asymmetric wall wash

Lumen output: 850lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Silver/Mirror Black

Size: 110x110xH81mm

Cut-out: 95x95mm

IP rating: IP20





Mirror Silver R1 Mirror Black R2


Photometric Data

LED 18W	cd/Klm	Beam Angle: Asymmetric	
60°	1079.0 lx	0.63m	
60°	269.60 lx	1.26m	
48°	119.80 lx	1.89m	
30°	67.410 lx	2.52m	
30°	43.140 lx	3.15m	
120°	High illuminance	Diameter	

Light Performance

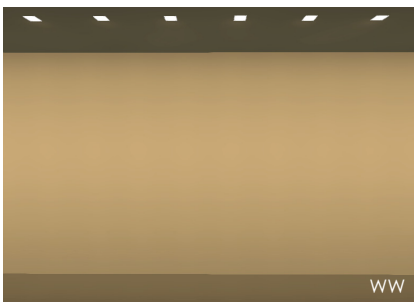

$h=3/4m, a(\text{off wall})=0.8-1.0m$



$d=0.6-0.8m$



Ordering Part No.

A-FDR11095W-18W-ND-WW-930-WH-R1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-FDR11095W	18W	ND Non Dim	WW Wall wash	930 90&3000K	WH White	R1 Mirror Silver		IP20 blank
		TD Triac Dim		940 90&4000K	BK Black	R2 Mirror Black		
		VD 1-10V Dim		830 80&3000K				
		DD DALI Dim		840 80&4000K				

Flux for Recessed Downlight

A-FDR22055

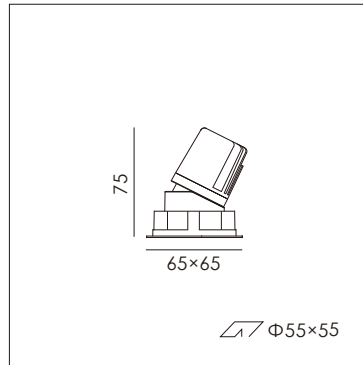

Power: 9W@36V/200mA

CCT: 2700K/3000K/3500K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 525lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Silver/Mirror Black/Matt Black


Size: 65×65×H75mm

Cut-out: Dia55×55mm

IP rating: IP20



Mirror Silver R1 Mirror Black R2 Mirror Gold R3






Oval lens L1 Flood lens L2 Honeycomb L3



Amber filter F1 Blue filter F2 Red filter F3

Photometric Data

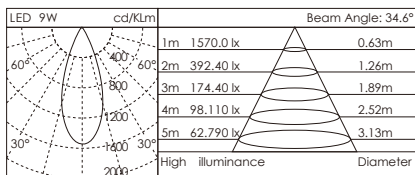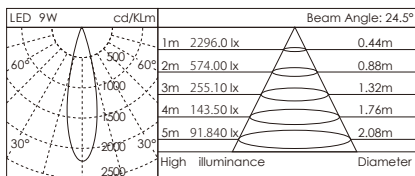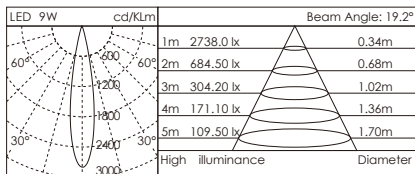



Light Performance



Ordering Part No.

A-FDR22055-9W-ND-15D-930-WH-R1-L1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-FDR22055	9W	ND Non Dim	15D 15°	930 90&3000K	WH White	R1 Mirror Silver	L1 Oval lens	IP20 blank
A-FDR22055T (Trimless)		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R2 Mirror Black	F1 Amber filter	
		VD 1-10V Dim	36D 36°	830 80&3000K		R3 Mirror Gold		
		DD DALI Dim		840 80&4000K				

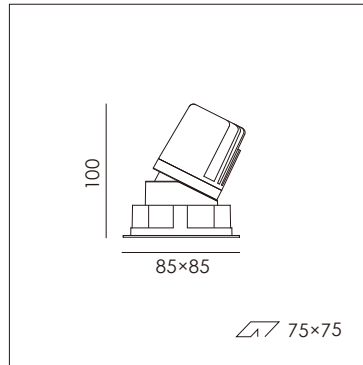

Power: 12W@36V/300mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 900lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Silver/Mirror Black/Matt Black


Size: 85×85×H100mm

Cut-out: 75×75mm

IP rating: IP20



Mirror Silver R1 Mirror Black R2 Mirror Gold R3






Oval lens L1 Flood lens L2 Honeycomb L3






Amber filter F1 Blue filter F2 Red filter F3

Photometric Data

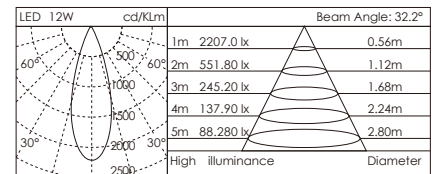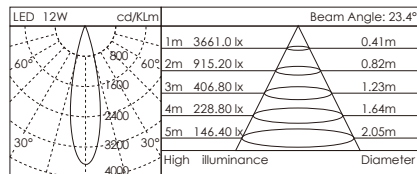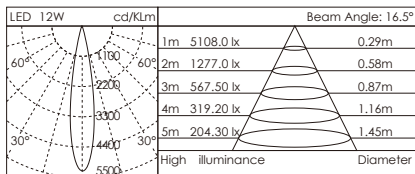



Light Performance

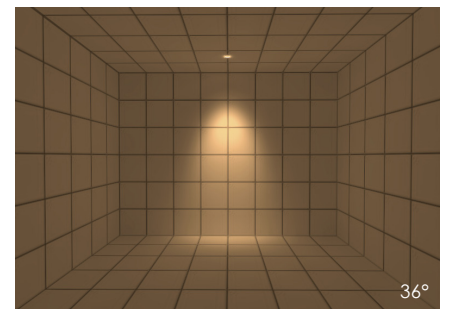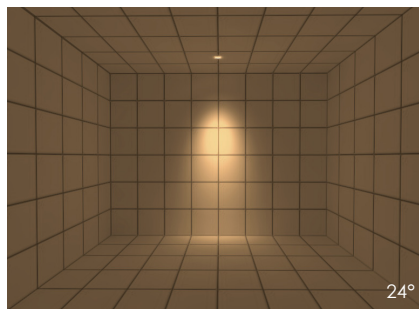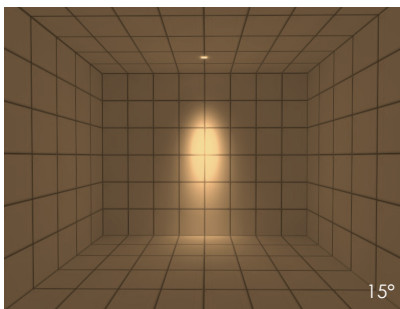

Ordering Part No.

A-FDR22075-12W-ND-15D-930-WH-R1-L1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-FDR22075	12W	ND Non Dim	15D 15°	930 90&3000K	WH White	R1 Mirror Silver	L1 Oval lens	IP20 blank
A-FDR22075T (Trimless)		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R2 Mirror Black	F1 Amber filter	
		VD 1-10V Dim	36D 36°	830 80&3000K		R3 Mirror Gold		
		DD DALI Dim		840 80&4000K				

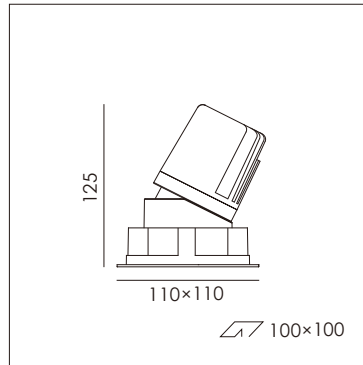

Power: 25W@36V/650mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 1875lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Silver/Mirror Black/Matt Black


Size: 110×110×H125mm

Cut-out: 100×100mm

IP rating: IP20



Mirror Silver R1 Mirror Black R2 Mirror Gold R3






Oval lens L1 Flood lens L2 Honeycomb L3






Amber filter F1 Blue filter F2 Red filter F3

Photometric Data

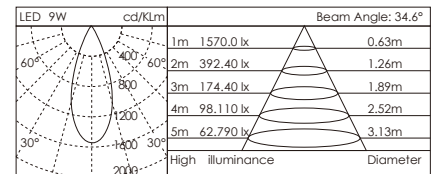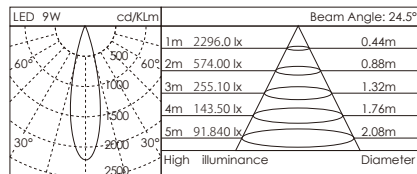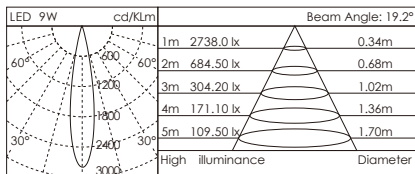



Light Performance

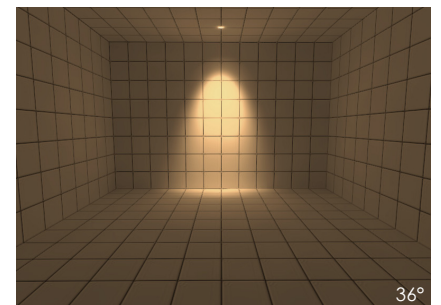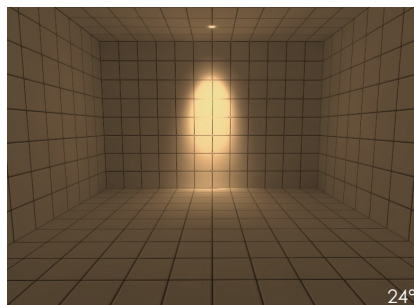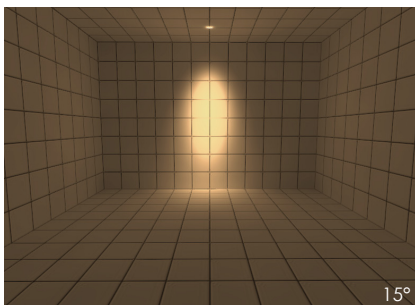

Ordering Part No.

A-FDR22100-25W-ND-15D-930-WH-R1-L1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-FDR22100	25W	ND Non Dim	15D 15°	930 90&3000K	WH White	R1 Mirror Silver	L1 Oval lens	IP20 blank
A-FDR22100T (Trimless)		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R2 Mirror Black	F1 Amber filter	
		VD 1-10V Dim	36D 36°	830 80&3000K		R3 Mirror Gold		
		DD DALI Dim		840 80&4000K				

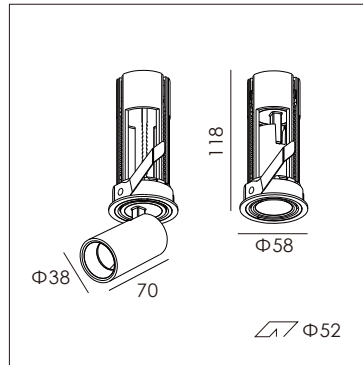

Power: 7W@36V/150mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 360lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Matt Black/Matt White




Size: Dia58×H118mm

Cut-out: Dia52mm




IP rating: IP20

Matt Black
R5Matt White
R6Oval lens
L1Flood lens
L2Honeycomb
L3Amber filter
F1Blue filter
F2Red filter
F3

Photometric Data

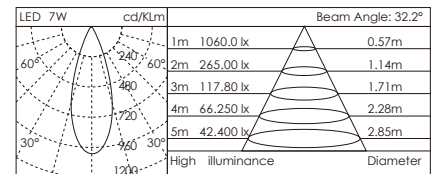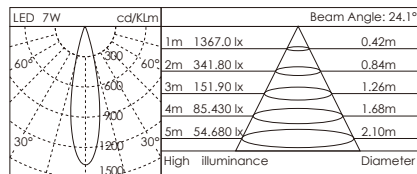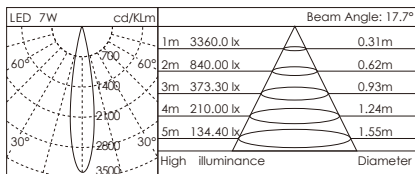

Light Performance

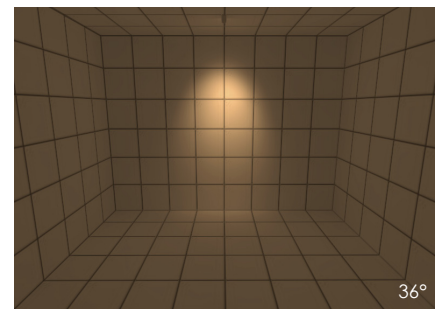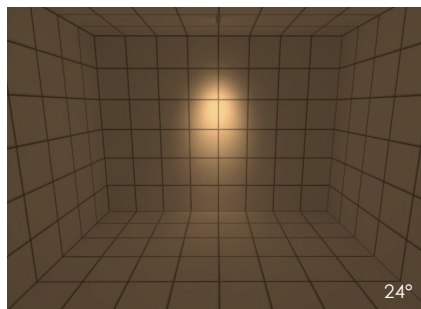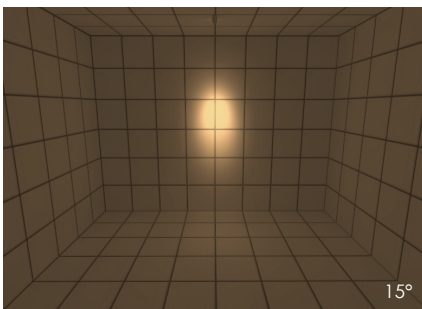


Ordering Part No.

A-DR42052-7W-ND-15D-930-WH-R1-L1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR42052	7W	ND Non Dim	15D 15°	930 90&3000K	WH White	R5 Matt Black	L1 Oval lens	IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R6 Matt White	F1 Amber filter	
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

Find for Recessed Trimless Spotlight

A-DR42052T

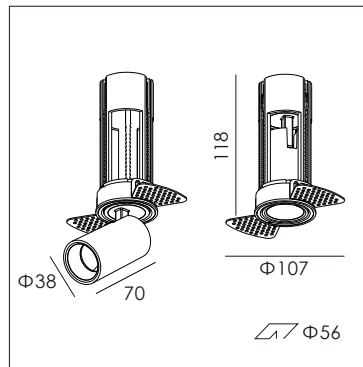

Power: 7W@36V/150mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 360lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Matt Black/Matt White


Size: Dia107×H118mm

Cut-out: Dia56mm

IP rating: IP20



Matt Black R5
Matt White R6






Oval lens L1
Flood lens L2
Honeycomb L3



Amber filter F1
Blue filter F2
Red filter F3

Photometric Data

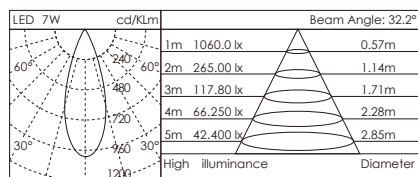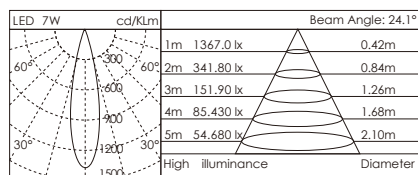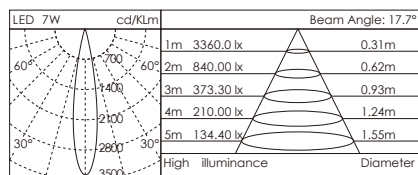



Light Performance



Ordering Part No.

A-DR42052T-7W-ND-15D-930-WH-R1-L1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR42052T	7W	ND Non Dim	15D 15°	930 90&3000K	WH White	R5 Matt Black	L1 Oval lens	IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R6 Matt White	F1 Amber filter	
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

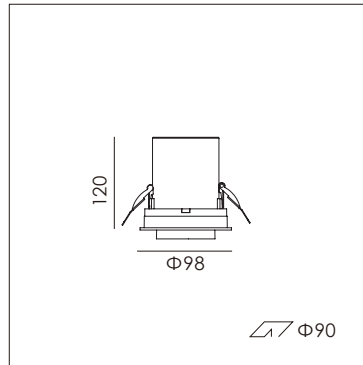

Power: 12W@36V/300mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 750lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum


Finishing color: White/Black

Reflector color: Matt Black/Matt White




Size: Dia98×H120mm

Cut-out: Dia90mm




IP rating: IP20



Photometric Data

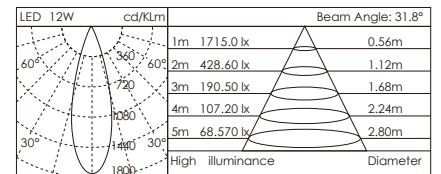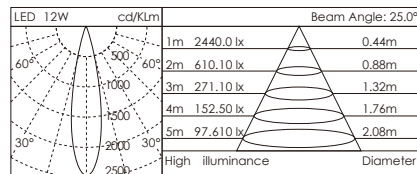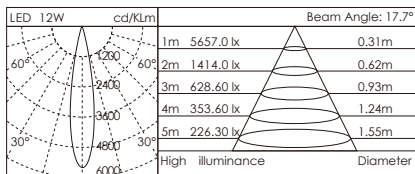



Light Performance

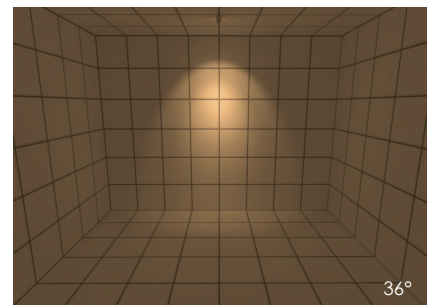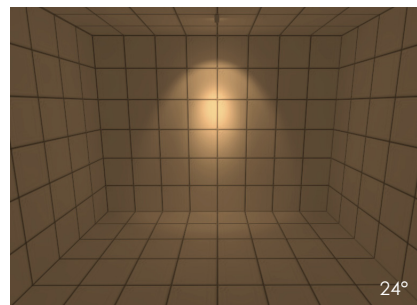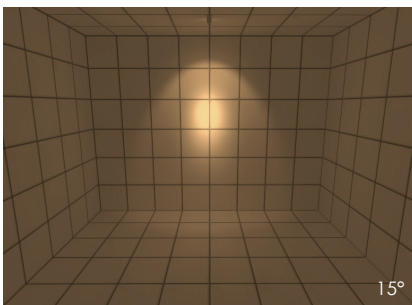

Ordering Part No.

A-DR42090-1 12W-ND-15D-930-WH-R5-L1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR42090-1	12W	ND Non Dim	15D 15°	930 90&3000K	WH White	R5 Matt Black	L1 Oval lens	IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R6 Matt White	F1 Amber filter	
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

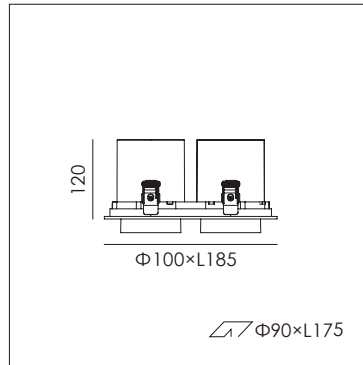

Power: 12W×2@36V/300mA×2

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 1500lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum


Finishing color: White/Black

Reflector color: Matt Black/Matt White




Size: Dia100×L185×H120mm

Cut-out: Dia90×L175mm




IP rating: IP20



Photometric Data

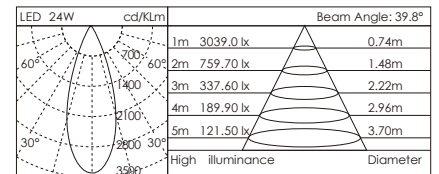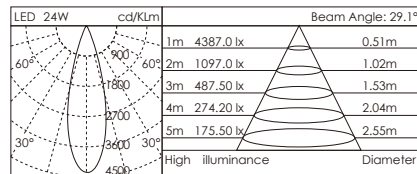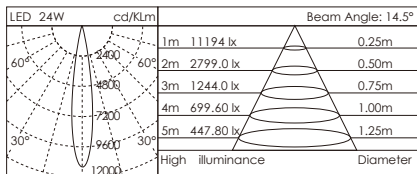

Light Performance

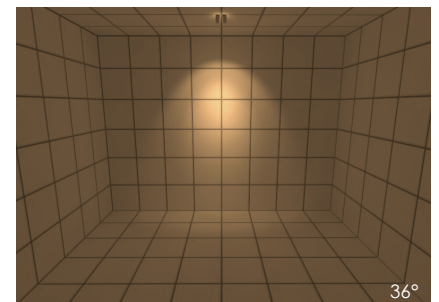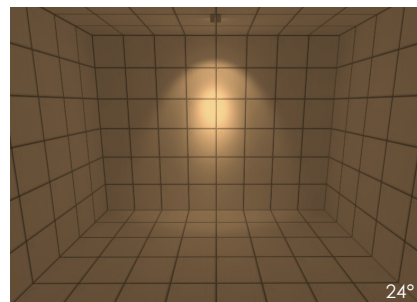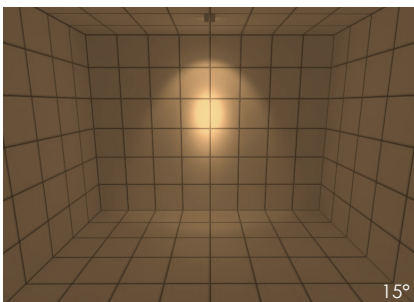



Ordering Part No.

A-DR42090-2 12W×2-ND-15D-930-WH-R5-L1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR42090-2	12W×2	ND Non Dim	15D 15°	930 90&3000K	WH White	R5 Matt Black	L1 Oval lens	IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R6 Matt White	F1 Amber filter	
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

Find for Recessed Spotlight

A-DR42115-1

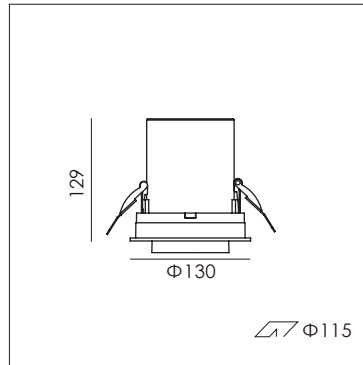

Power: 25W@36V/650mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 1800lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum


Finishing color: White/Black

Reflector color: Matt Black/Matt White




Size: Dia130×H129mm

Cut-out: Dia115mm




IP rating: IP20



Photometric Data

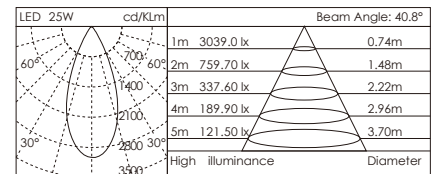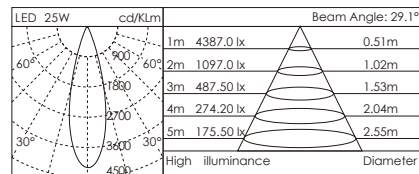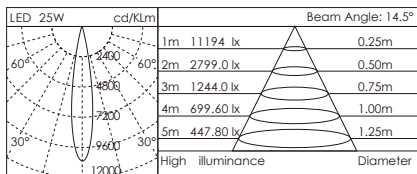

Light Performance

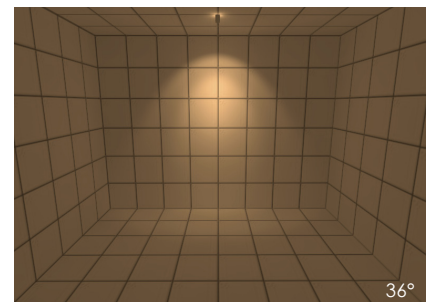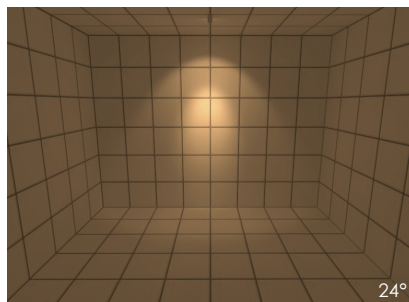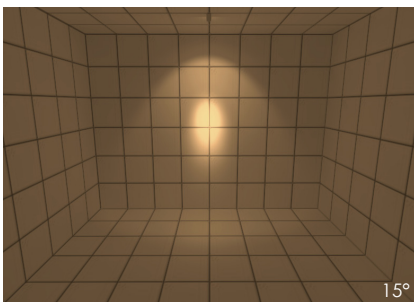



Ordering Part No.

A-DR42115-1 25W-ND-15D-930-WH-R5-L1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR42115-1	25W	ND Non Dim	15D 15°	930 90&3000K	WH White	R5 Matt Black	L1 Oval lens	IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R6 Matt White	F1 Amber filter	
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

Find for Recessed Spotlight

A-DR42115-2

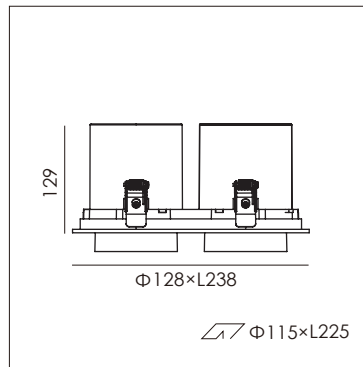

Power: 25W×2@36V/650mA×2

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 3600lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum


Finishing color: White/Black

Reflector color: Matt Black/Matt White




Size: Dia128×L238×H129mm

Cut-out: Dia115×L225mm




IP rating: IP20



Photometric Data

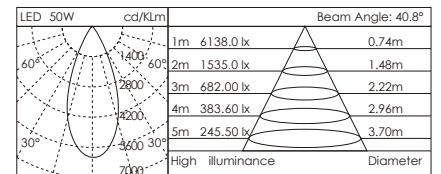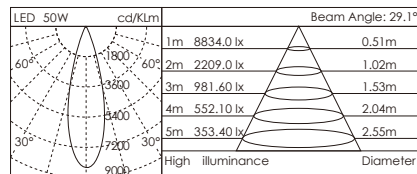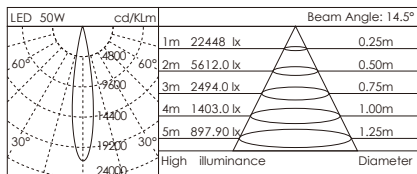


Light Performance

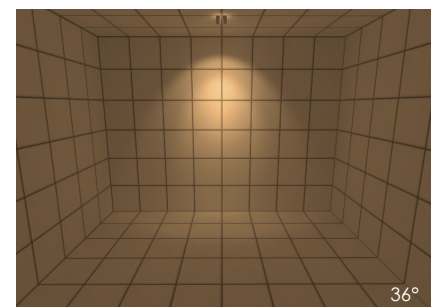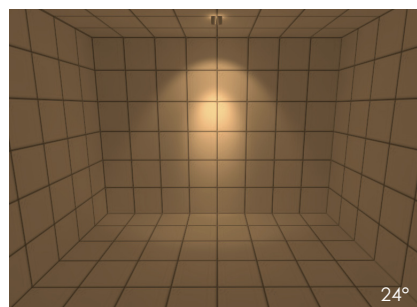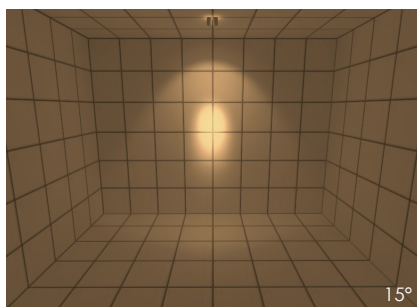

Ordering Part No.

A-DR42115-2 25W*2-ND-15D-930-WH-R5-L1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DR42115-2	25W*2	ND Non Dim	15D 15°	930 90&3000K	WH White	R5 Matt Black	L1 Oval lens	IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R6 Matt White	F1 Amber filter	
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

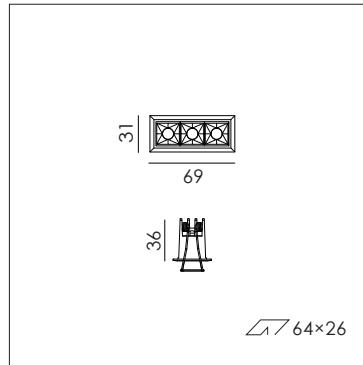

Power: 4W@9V/350mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 280lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black




Reflector color: White/Black

Size: 69×31×H36mm




Cut-out: 64×26mm

IP rating: IP20

Photometric Data

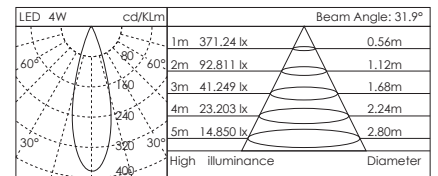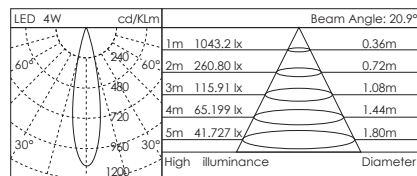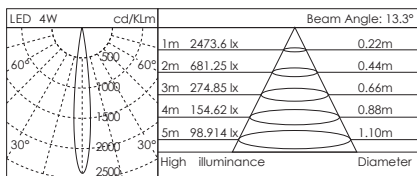


Light Performance

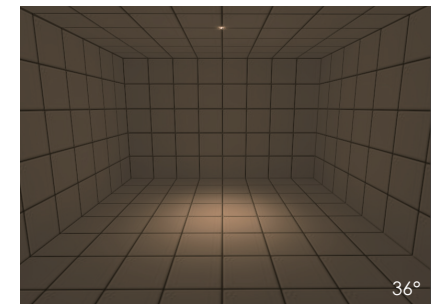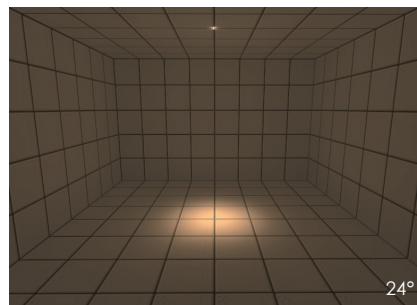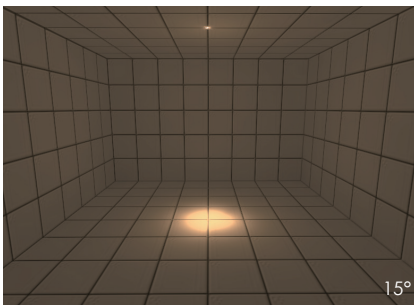

Ordering Part No.

A-DS1103S-4W-ND-15D-930-WH-R1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DS1103S	4W	ND Non Dim	15D 15°	930 90&3000K	WH White	R1 Black		IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R2 White		
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

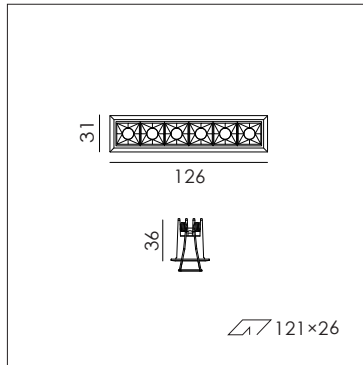

Power: 8W@18V/350mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 560lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black




Reflector color: White/Black

Size: 126×31×H36mm




Cut-out: 121×26mm

IP rating: IP20

Photometric Data

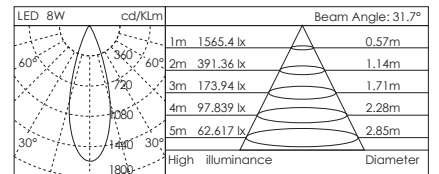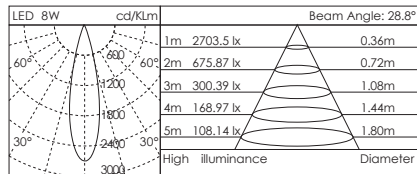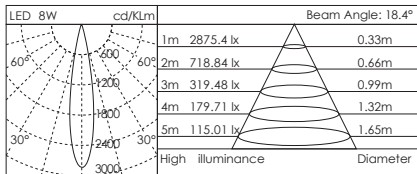


Light Performance

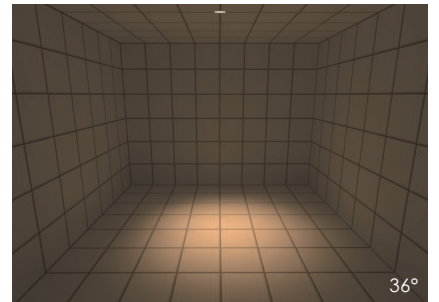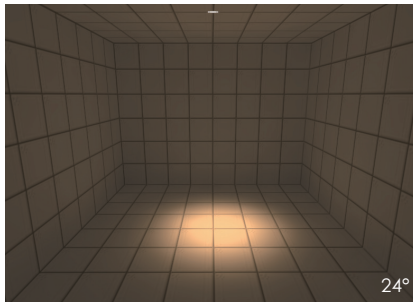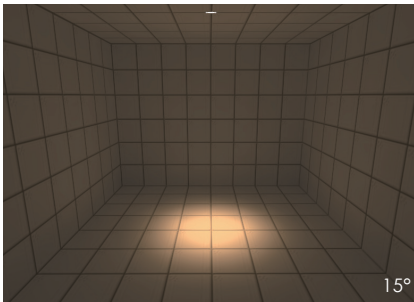

Ordering Part No.

A-DS1106S-8W-ND-15D-930-WH-R1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DS1106S	8W	ND Non Dim	15D 15°	930 90&3000K	WH White	R1 Black		IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R2 White		
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

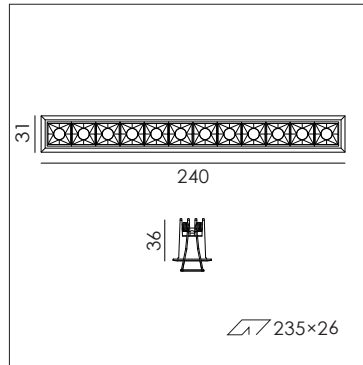

Power: 15W@36V/350mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 1050lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black




Reflector color: White/Black

Size: 240×31×H36mm




Cut-out: 235×26mm

IP rating: IP20

Photometric Data

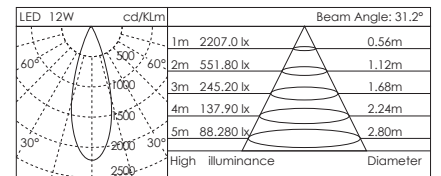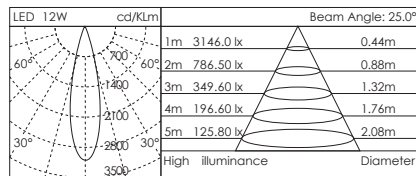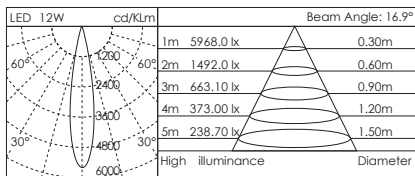



Light Performance

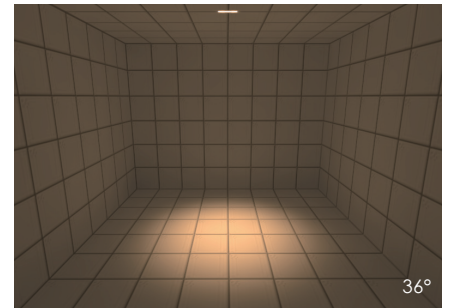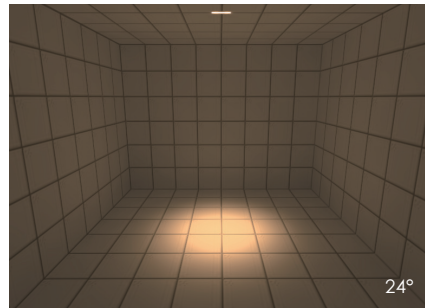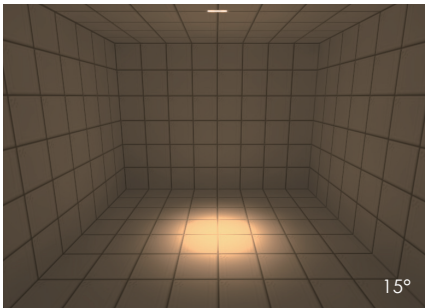

Ordering Part No.

A-DS1112S-15W-ND-15D-930-WH-R1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DS1112S	15W	ND Non Dim	15D 15°	930 90&3000K	WH White	R1 Black		IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R2 White		
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

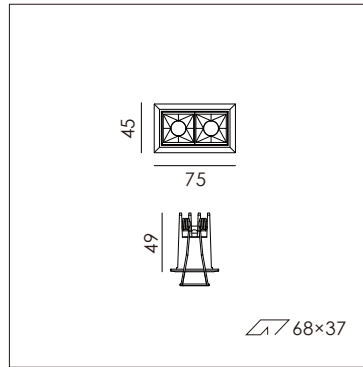

Power: 4W@6V/700mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 12°/30°/45°

Lumen output: 280lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black




Reflector color: White/Black

Size: 75×45×H49mm

Cut-out: 68×37mm

IP rating: IP20/IP65

Photometric Data

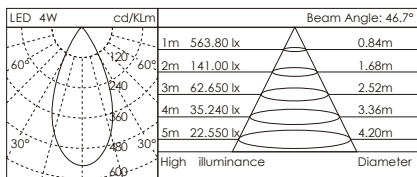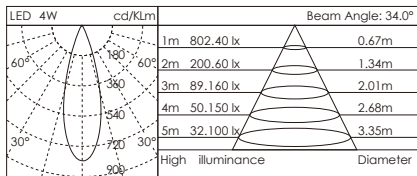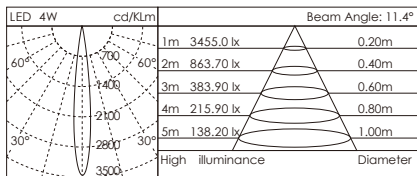



Light Performance



Ordering Part No.

A-DS1102-4W-ND-12D-930-WH-L1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DS1102	4W	ND Non Dim	12D 12°	930 90&3000K	WH White	R1 Black		IP20 blank
A-DS1102-65 (IP65 solution)		TD Triac Dim	30D 30°	940 90&4000K	BK Black	R2 White		IP65
A-DS1102T (Trimless)		VD 1-10V Dim	45D 45°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

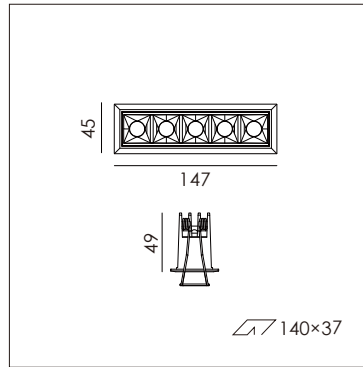

Power: 10W@15V/700mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 12°/30°/45°

Lumen output: 650lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black




Reflector color: White/Black

Size: 147×45×H49mm




Cut-out: 140×37mm

IP rating: IP20/IP65

Photometric Data

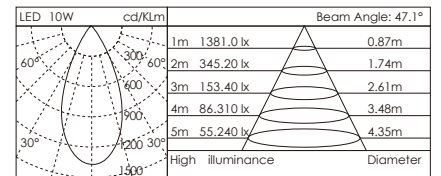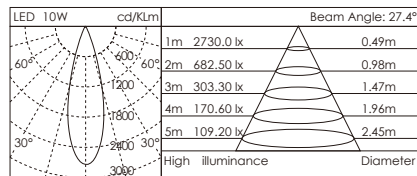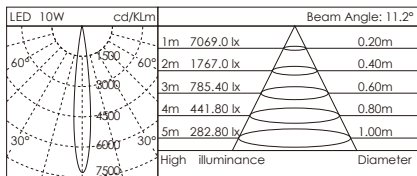


Light Performance

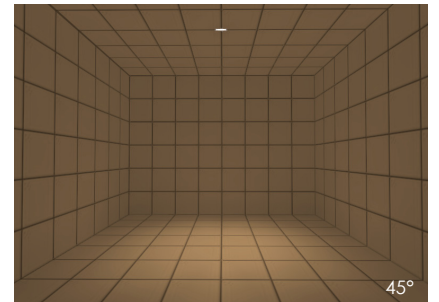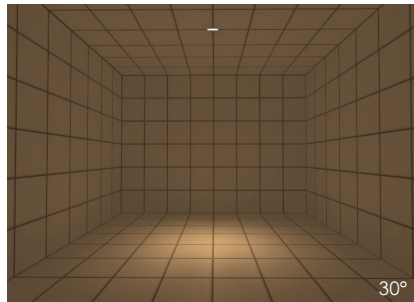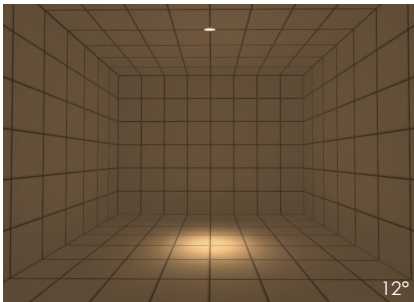

Ordering Part No.

A-DS1105-10W-ND-12D-930-WH-R1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DS1105	10W	ND Non Dim	12D 12°	930 90&3000K	WH White	R1 Black		IP20 blank
A-DS1105-65 (IP65 solution)		TD Triac Dim	30D 30°	940 90&4000K	BK Black	R2 White		IP65
A-DS1105T (Trimless)		VD 1-10V Dim	45D 45°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

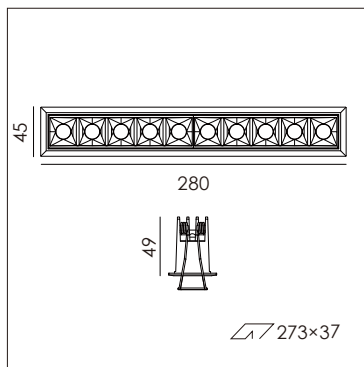

Power: 20W@30V/700mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 12°/30°/45°

Lumen output: 1400lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black




Reflector color: White/Black

Size: 280×45×H49mm




Cut-out: 273×37mm

IP rating: IP20

Photometric Data

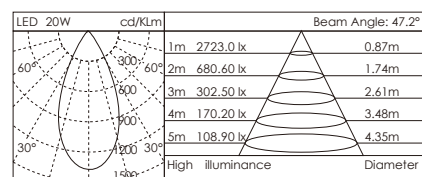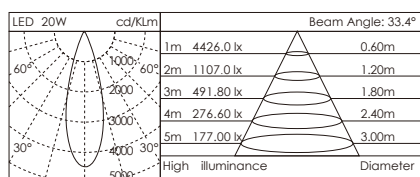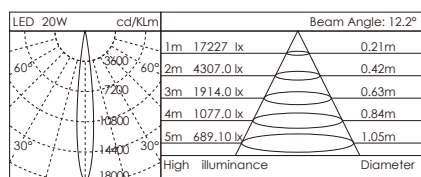


Light Performance

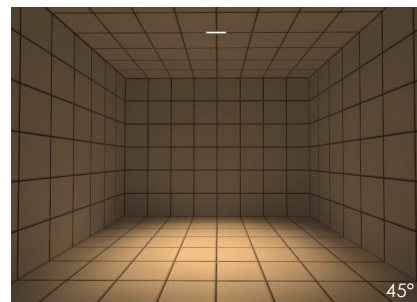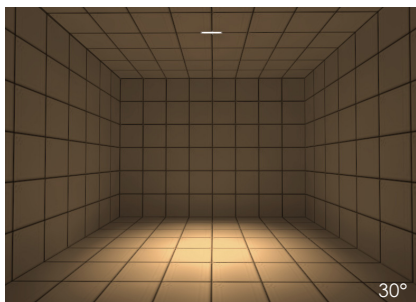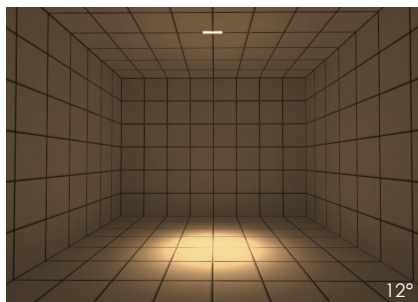

Ordering Part No.

A-DS1110-20W-ND-12D-930-WH-R1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DS1110	20W	ND Non Dim	12D 12°	930 90&3000K	WH White	R1 Black		IP20 blank
		TD Triac Dim	30D 30°	940 90&4000K	BK Black	R2 White		
		VD 1-10V Dim	45D 45°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

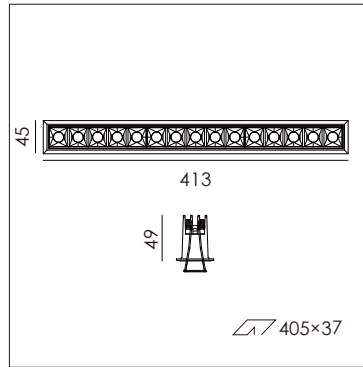

Power: 30W@45V/700mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 12°/30°/45°

Lumen output: 2300lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black




Reflector color: White/Black

Size: 413×45×H49mm




Cut-out: 405×37mm

IP rating: IP20

Photometric Data

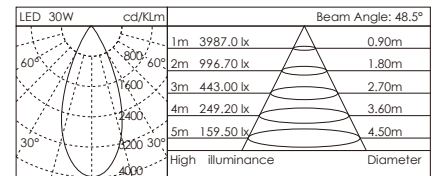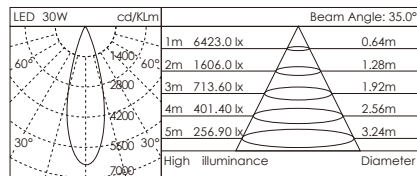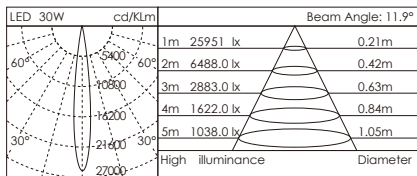

Light Performance

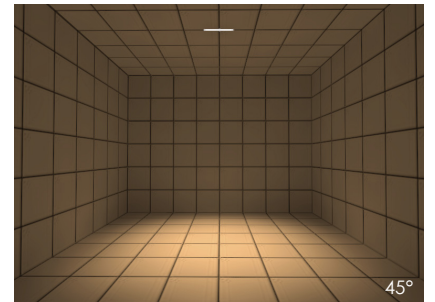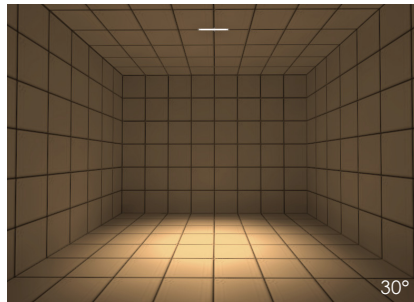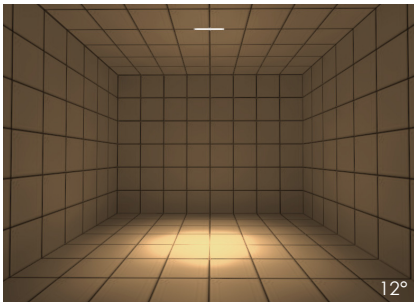


Ordering Part No.

A-DS1115-30W-ND-12D-930-WH-R1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DS1115	30W	ND Non Dim	12D 12°	930 90&3000K	WH White	R1 Black		IP20 blank
		TD Triac Dim	30D 30°	940 90&4000K	BK Black	R2 White		
		VD 1-10V Dim	45D 45°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

Slimmer for Recessed Spotlight

A-DS3202

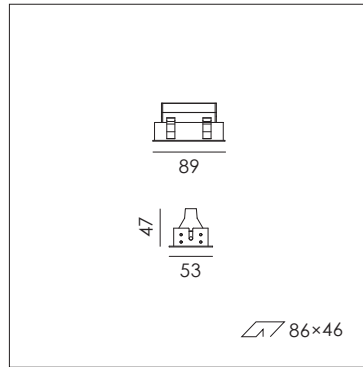

Power: 4W@6V/700mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°/50°/10°×60°/15°×30°

Lumen output: 360lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Matt Black/Matt White




Size: 89×53×H47mm

Cut-out: 86×46mm




IP rating: IP20



Photometric Data

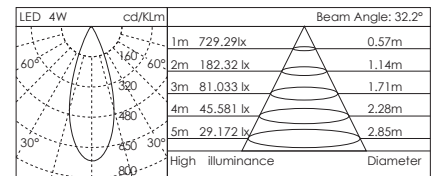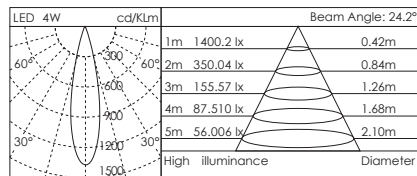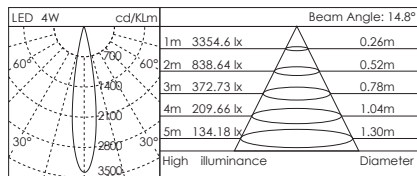

Light Performance

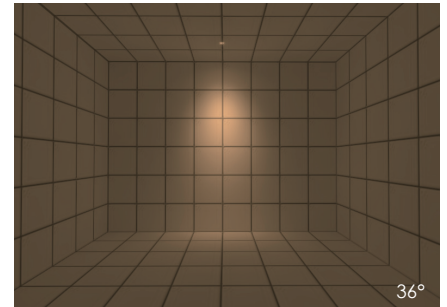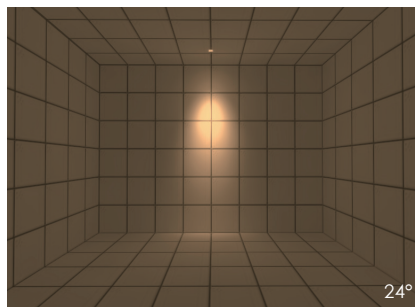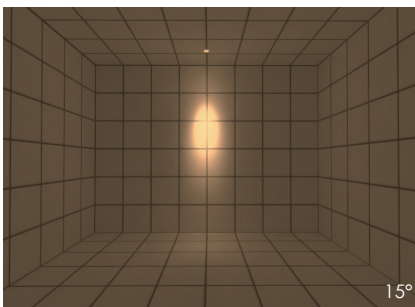


Ordering Part No.

A-DS3202-4W-ND-15D-930-WH-R1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DS3202	4W	ND Non Dim	15D 15°	930 90&3000K	WH White	R5 Matt Black		IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R6 Matt White		
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

Slimmer for Recessed Spotlight

A-DS3205

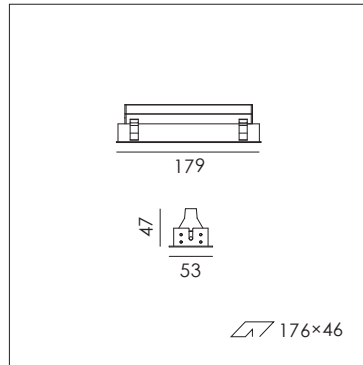

Power: 10W@15V/700mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°/50°/10°×60°/15°×30°

Lumen output: 820lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Matt Black/Matt White




Size: 179×53×H47mm

Cut-out: 176×46mm




IP rating: IP20



Photometric Data

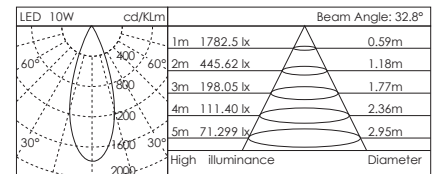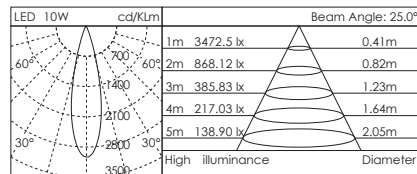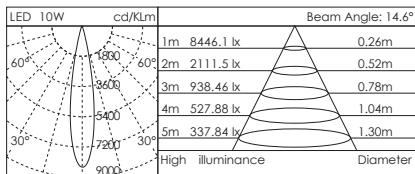

Light Performance

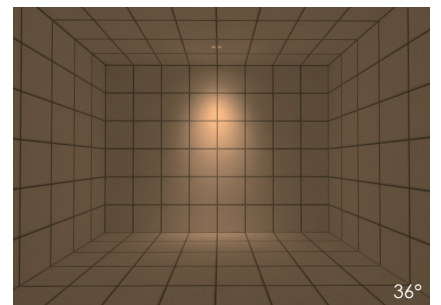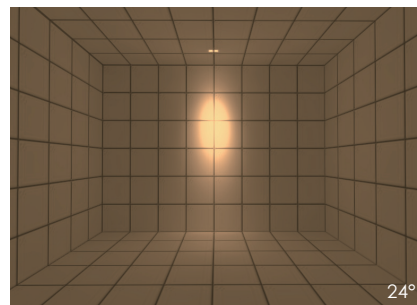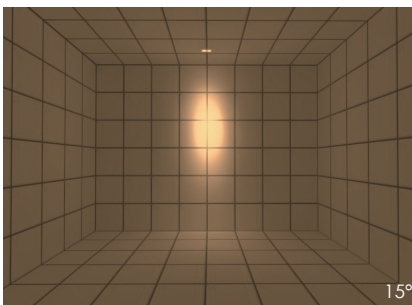


Ordering Part No.

A-DS3205-10W-ND-15D-930-WH-R1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DS3205	10W	ND Non Dim	15D 15°	930 90&3000K	WH White	R5 Matt Black		IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R6 Matt White		
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

Slimmer for Recessed Spotlight

A-DS3210

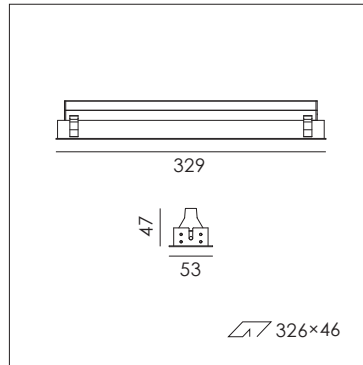

Power: 20W@30V/700mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°/50°/10°×60°/15°×30°

Lumen output: 1600lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Matt Black/Matt White




Size: 329×53×H47mm

Cut-out: 326×46mm




IP rating: IP20



Photometric Data

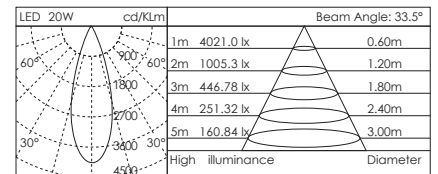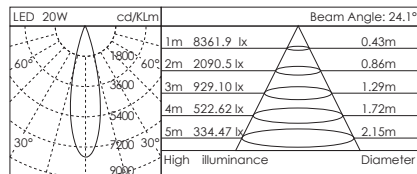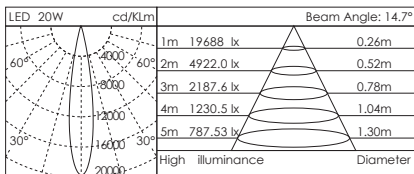



Light Performance

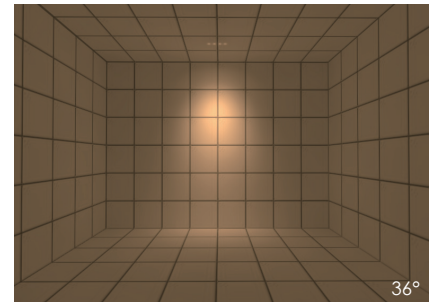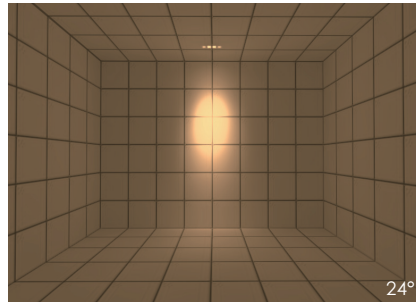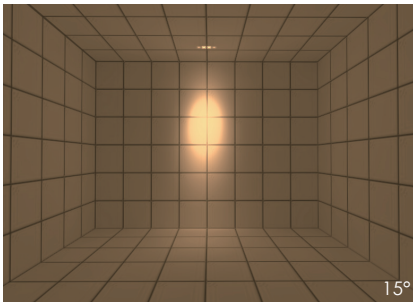

Ordering Part No.

A-DS3210-20W-ND-15D-930-WH-R5

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DS3210	20W	ND Non Dim	15D 15°	930 90&3000K	WH White	R5 Matt Black		IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R6 Matt White		
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

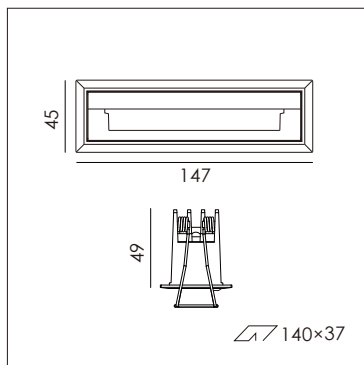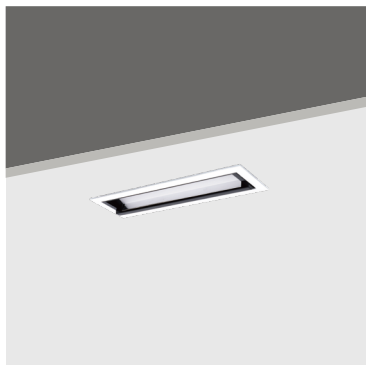

Power: 10W@15V/700mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: Asymmetric wall washing

Lumen output: 400lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black


Reflector color: White/Black

Size: 147×45×H49mm



Cut-out: 140×37mm

IP rating: IP20


Photometric Data

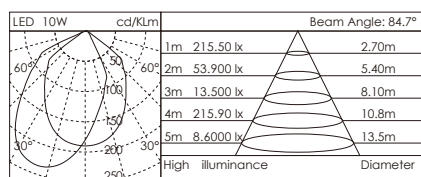

Light Performance

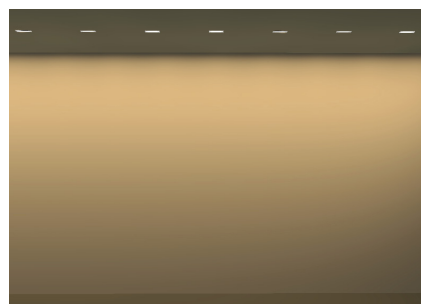

$h=3.0m, a(\text{off wall})=1.0m$




$d=1.0m$



Ordering Part No.

A-DS1105W-10W-ND-WW-930-WH

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DS1105W	10W	ND Non Dim	WW Wash	930 90&3000K	WH White			IP20 blank
		TD Triac Dim		940 90&4000K	BK Black			
		VD 1-10V Dim		830 80&3000K				
		DD DALI Dim		840 80&4000K				

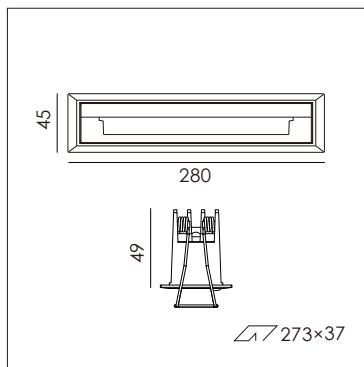

Power: 20W@30V/700mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: Asymmetric wall washing

Lumen output: 800lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black


Reflector color: White/Black

Size: 280×45×H49mm


Cut-out: 273×37mm

IP rating: IP20



Photometric Data

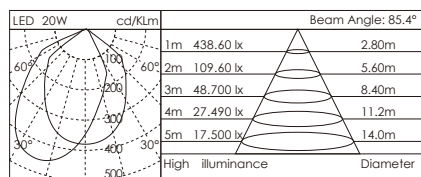

Light Performance

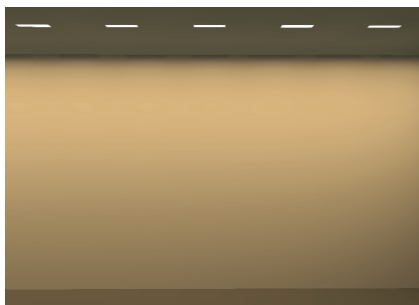


Light Arrangement



Ordering Part No.

A-DS1110W-20W-ND-WW-930-WH

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DS1110W	20W	ND Non Dim	WW Wash	930 90&3000K	WH White			IP20 blank
		TD Triac Dim		940 90&4000K	BK Black			
		VD 1-10V Dim		830 80&3000K				
		DD DALI Dim		840 80&4000K				

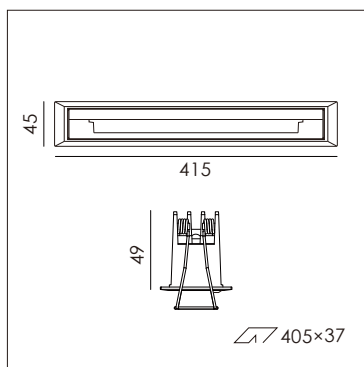

Power: 30W@30V/700mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: Asymmetric wall washing

Lumen output: 1200lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black


Reflector color: White/Black

Size: 415×45×H49mm




Cut-out: 405×37mm

IP rating: IP20

Photometric Data

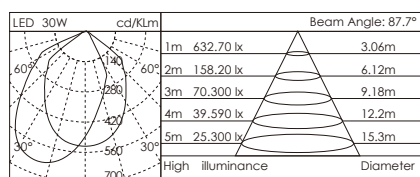


Light Performance

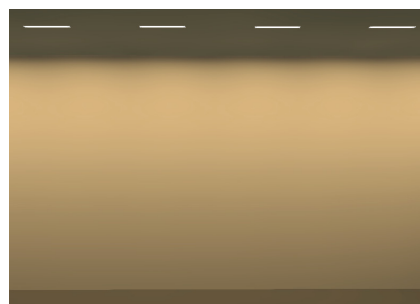

Ordering Part No.

A-DS1115W-30W-ND-WW-930-WH

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-DS1115W	30W	ND Non Dim	WW Wash	930 90&3000K	WH White			IP20 blank
		TD Triac Dim		940 90&4000K	BK Black			
		VD 1-10V Dim		830 80&3000K				
		DD DALI Dim		840 80&4000K				

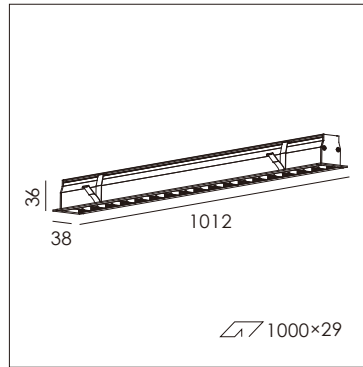

Power: 24W@1012mm/12W@512mm/4W@172mm

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/30°/45°/60°/10°×60°/25°×45°

Lumen output: 630lm@12W/3000K

Input voltage: DC 24V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: White/Black

Size: 1012×38×H36mm


Cut-out: 1000×29mm

IP rating: IP20

Photometric Data

LED 24W	cd/Klm	Beam Angle: 24×39°	
60°	800	1m 3841.0 lx	0.37m
60°	1600	2m 960.20 lx	0.74m
30°	2400	3m 426.80 lx	1.11m
30°	3200	4m 240.10 lx	1.48m
30°	4000	5m 153.60 lx	1.85m
High illuminance		Diameter	

Light Performance



$h=3.0m, a(\text{off wall})=0.15m$

Ordering Part No.

A-LR3836WA-24W-ND-15D-930-WH-1012

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Length	Accessory	IP rating
A-LR3836WA	24W	ND Non Dim	15D 15°	930 90&3000K	WH White	1000 1012mm		IP20 blank
	12W	TD Triac Dim	30D 30°	940 90&4000K	BK Black	512 512mm		
	4W	VD 1-10V Dim	45D 45°	830 80&3000K		172 172mm		
		DD DALI Dim		840 80&4000K				



Power: 24W@1000mm/12W@500mm/4W@160mm

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/30°/45°/60°/10°×60°/25°×45°

Lumen output: 1060lm@3000K

Input voltage: DC 24V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: Black



Reflector color: Black

Size: 1000×28×H35mm(H46mm with holder)

Cut-out: None







IP rating: IP20

Photometric Data

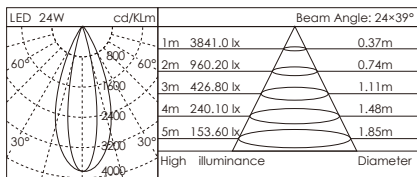

Light Performance



Distance from wall:50-300mm

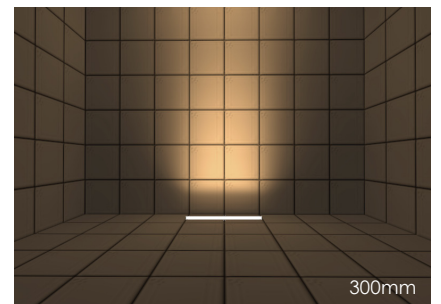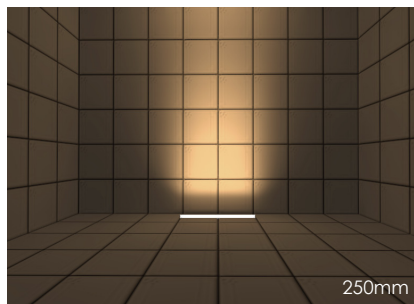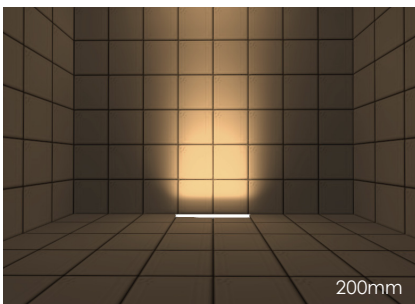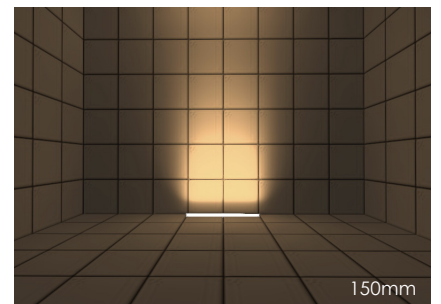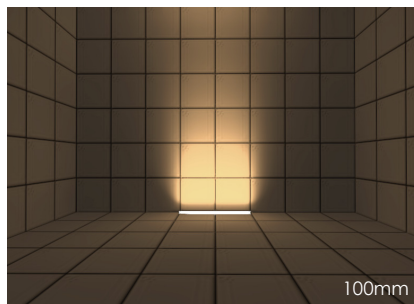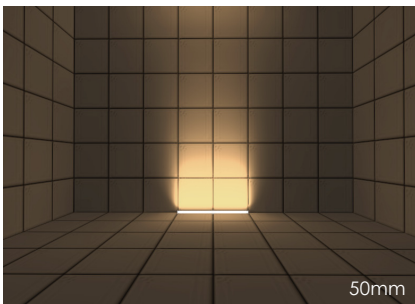

Ordering Part No.

A-LS2835WA-24W-ND-15D-930-WH-1000

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Length
A-LS2835WA	24W	ND Non Dim	15D 15°	930 90&3000K	BK Black	1000 1000mm
	12W	TD Triac Dim	30D 30°	940 90&4000K		500 500mm
	4W	VD 1-10V Dim	45D 45°	830 80&3000K		160 160mm
		DD DALI Dim		840 80&4000K		

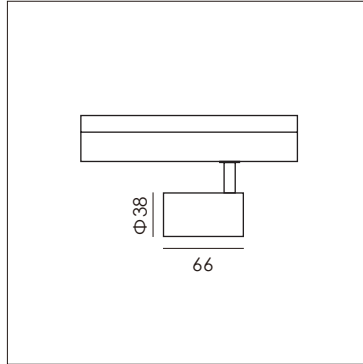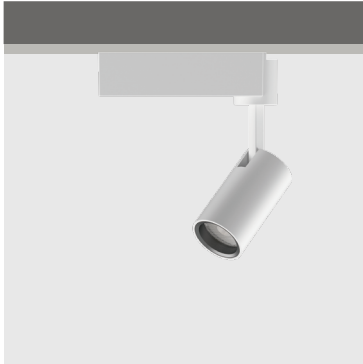

Power: 7W@36V/150mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 360lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Matt Black/Matt White




Size: Dia38×H66mm

Cut-out: None




IP rating: IP20



Photometric Data

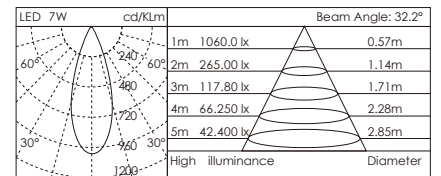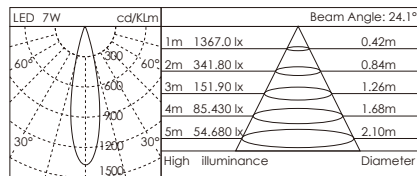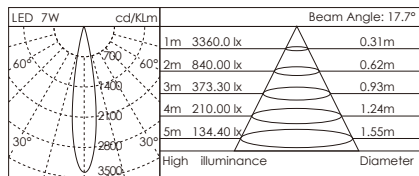



Light Performance

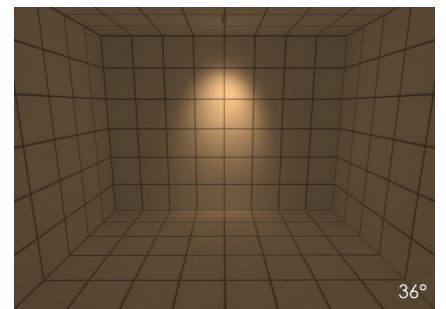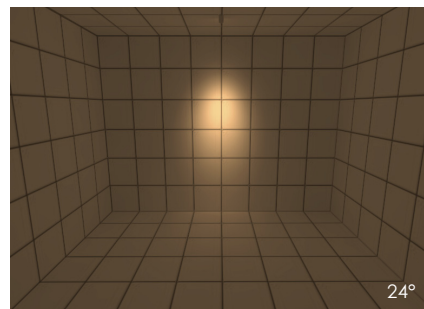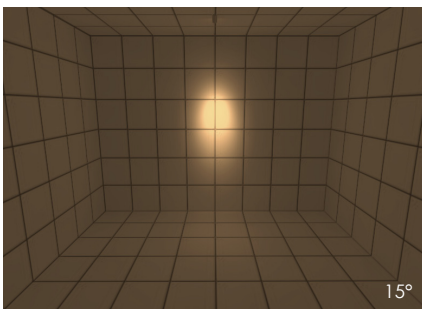

Ordering Part No.

A-TL12038-7W-ND-15D-930-WH-R5-L1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-TL12038	7W	ND Non Dim	15D 15°	930 90&3000K	WH White	R5 Matt Black	L1 Oval lens	IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R6 Matt White	F1 Amber filter	
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

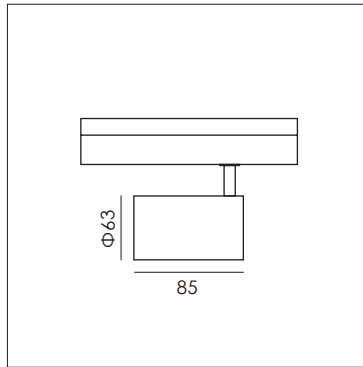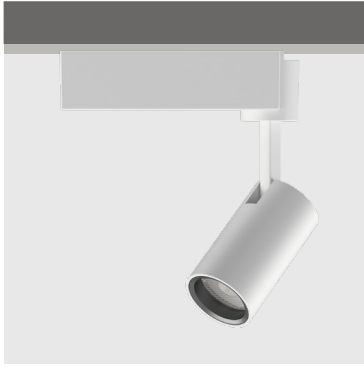

Power: 12W@36V/300mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 840lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Matt Black/Matt White


Size: Dia63×H85mm

Cut-out: None

IP rating: IP20



Matt Black R5
Matt White R6






Oval lens L1
Flood lens L2
Honeycomb L3






Amber filter F1
Blue filter F2
Red filter F3

Photometric Data

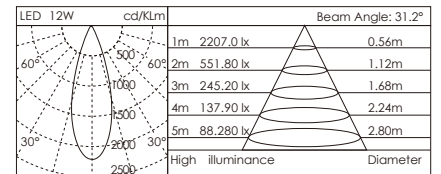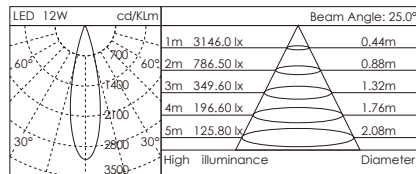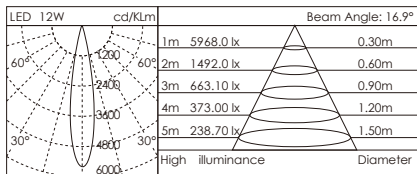



Light Performance

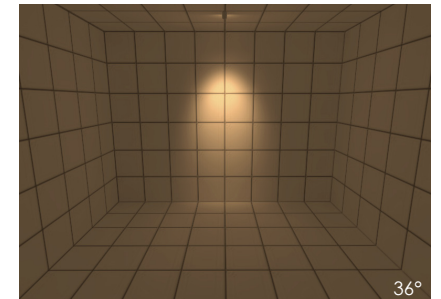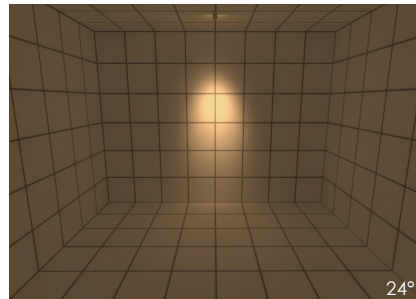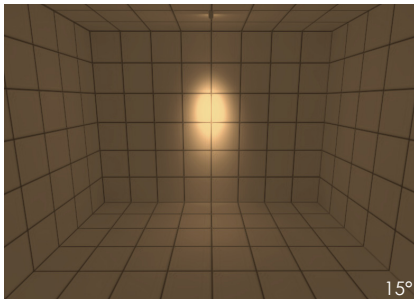

Ordering Part No.

A-TL12063-12W-ND-15D-930-WH-R5-L1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-TL12063	12W	ND Non Dim	15D 15°	930 90&3000K	WH White	R5 Matt Black	L1 Oval lens	IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R6 Matt White	F1 Amber filter	
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

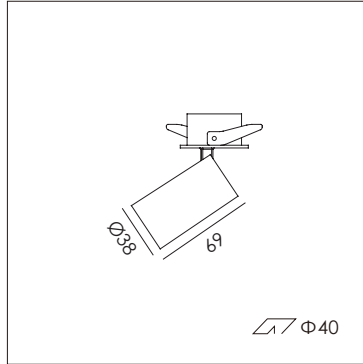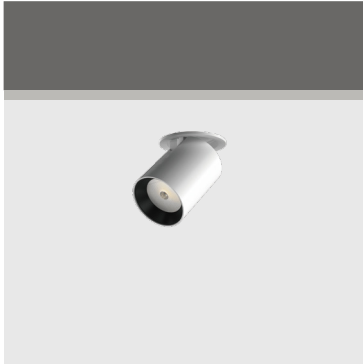

Power: 7W@36V/150mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 360lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum



Finishing color: White/Black

Reflector color: Matt Black/Matt White




Size: Dia38×H69mm

Cut-out: Dia40mm




IP rating: IP20



Photometric Data

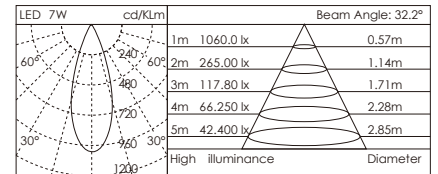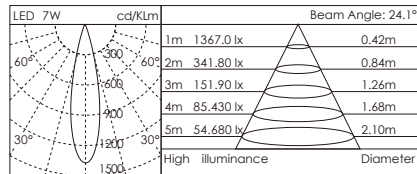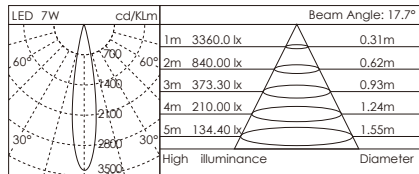



Light Performance

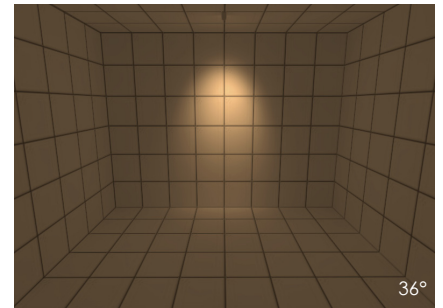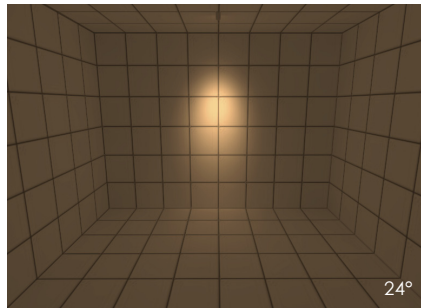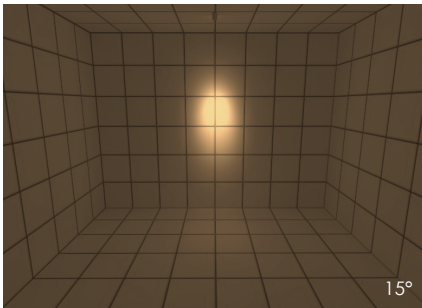

Ordering Part No.

A-SH-SP22038-7W-ND-15D-930-WH-R1-L1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-SP22038	7W	ND Non Dim	15D 15°	930 90&3000K	WH White	R5 Matt Black	L1 Oval lens	IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R6 Matt White	F1 Amber filter	
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

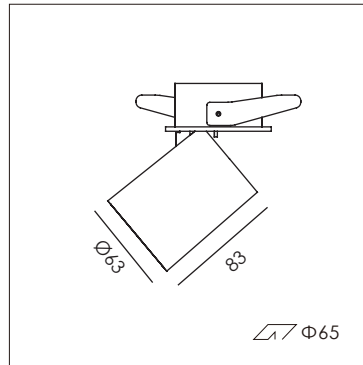

Power: 12W@36V/300mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 840lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum


Finishing color: White/Black

Reflector color: Matt Black/Matt White




Size: Dia63×H83mm

Cut-out: Dia65mm




IP rating: IP20



Photometric Data

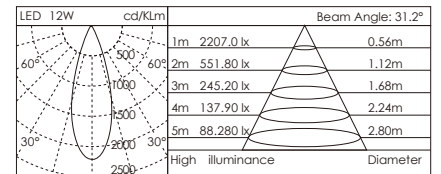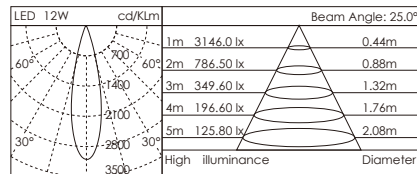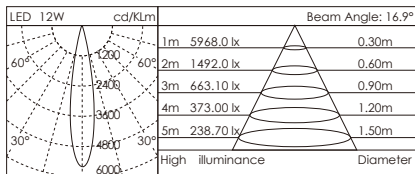


Light Performance

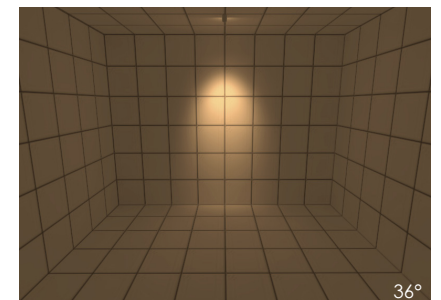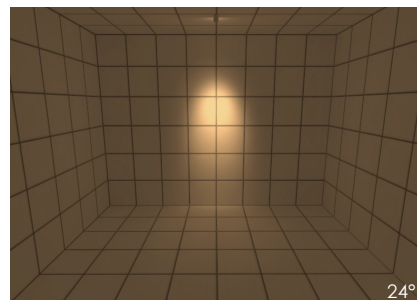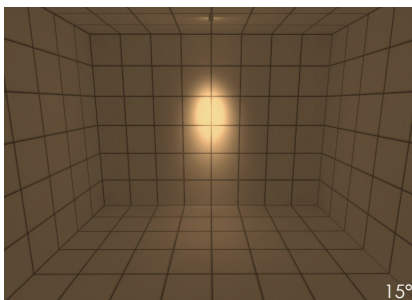

Ordering Part No.

A-SP22063-12W-ND-15D-930-WH-R5-L1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-SP22063	12W	ND Non Dim	15D 15°	930 90&3000K	WH White	R5 Matt Black	L1 Oval lens	IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R6 Matt White	F1 Amber filter	
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

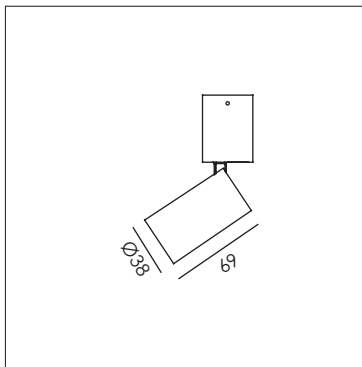

Power: 7W@36V/150mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 360lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Matt Black/Matt White

Size: Dia38×H69mm

Cut-out: None

IP rating: IP20



Matt Black
R5

Matt White
R6



Oval lens
L1



Flood lens
L2



Honeycomb
L3



Amber filter
F1






Blue filter
F2






Red filter
F3

Photometric Data

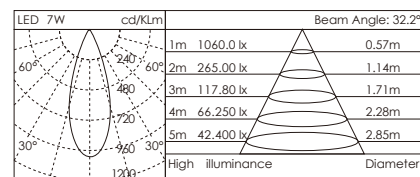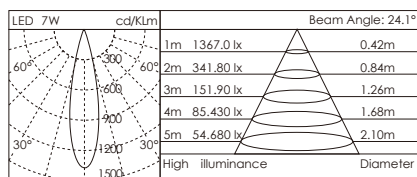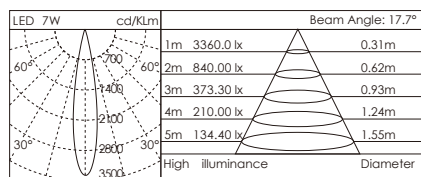


Light Performance

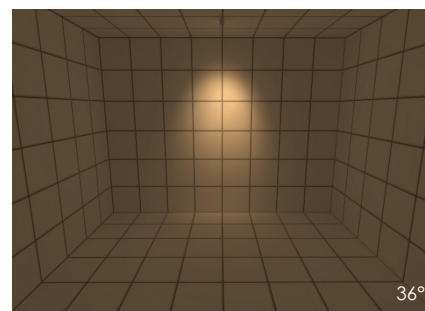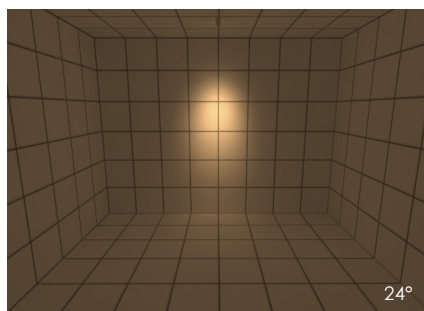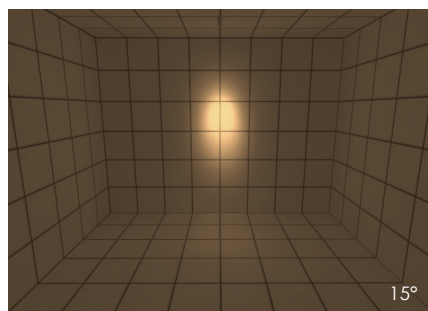

Ordering Part No.

A-SS22038-7W-ND-15D-930-WH-R5-L1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-SS22038	7W	ND Non Dim	15D 15°	930 90&3000K	WH White	R5 Matt Black	L1 Oval lens	IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R6 Matt White	F1 Amber filter	
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

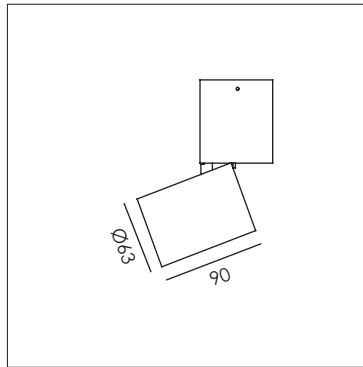

Power: 12W@36V/300mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 840lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum


Finishing color: White/Black

Reflector color: Matt Black/Matt White




Size: Dia63×H90mm

Cut-out: None




IP rating: IP20



Photometric Data

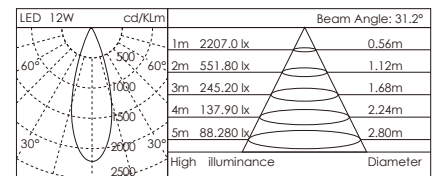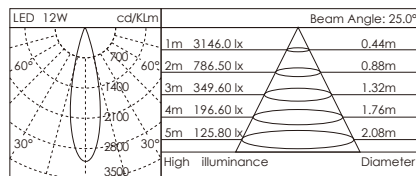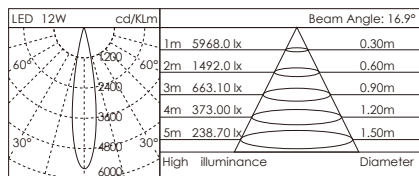


Light Performance

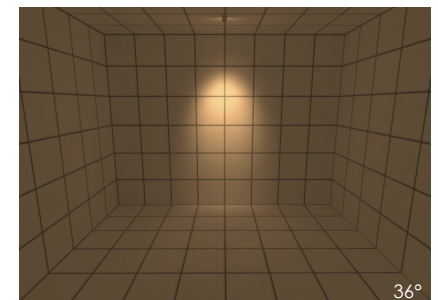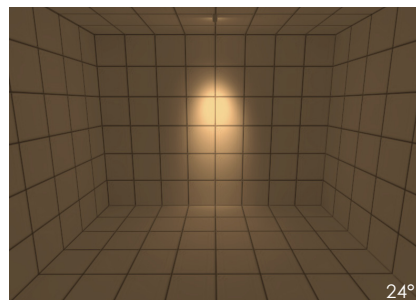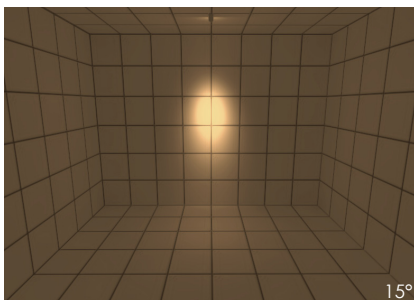

Ordering Part No.

A-SS22063-12W-ND-15D-930-WH-R5-L1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-SS22063	12W	ND Non Dim	15D 15°	930 90&3000K	WH White	R5 Matt Black	L1 Oval lens	IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black	R6 Matt White	F1 Amber filter	
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

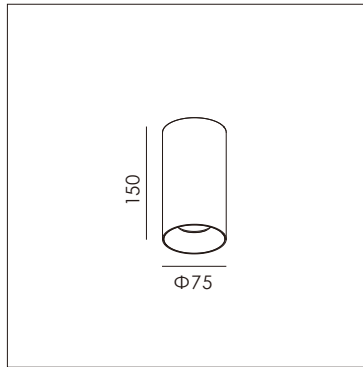

Power: 12W@36V/300mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 20°/40°

Lumen output: 840lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Silver/Mirror Black

Size: Dia75×H150mm



Cut-out: None

IP rating: IP20/IP65



Mirror Silver R1 Mirror Black R2

Photometric Data

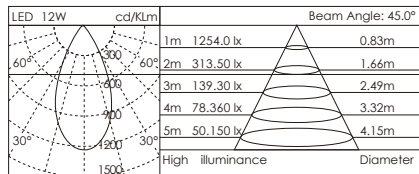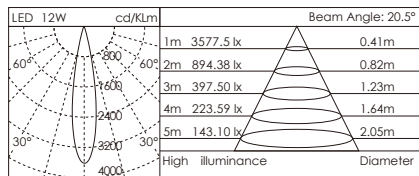


Light Performance



Ordering Part No.

A-SD11075-12W-ND-20D-930-WH-R1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-SD11075	12W	ND Non Dim	20D 20°	930 90&3000K	WH White	R1 Mirror Silver		IP20 blank
A-SD11075-65 (IP65 solution)		TD Triac Dim	40D 40°	940 90&4000K	BK Black	R2 Mirror Black		IP65
		VD 1-10V Dim		830 80&3000K				
		DD DALI Dim		840 80&4000K				

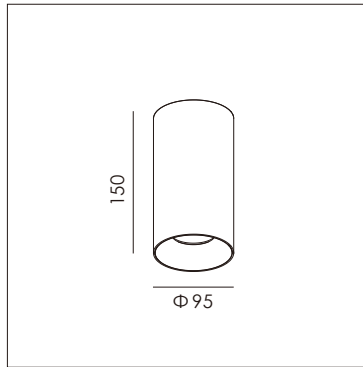

Power: 18W@36V/450mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 20°/40°

Lumen output: 1250lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Silver/Mirror Black

Size: Dia95×H150mm



Cut-out: None

IP rating: IP20/IP65





Mirror Silver R1 Mirror Black R2

Photometric Data

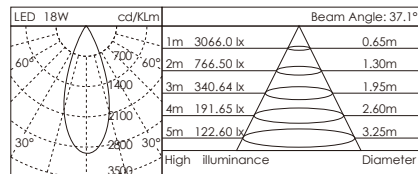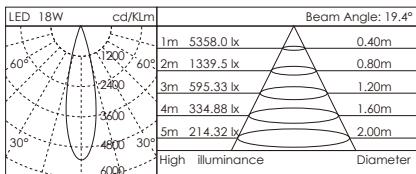


Light Performance

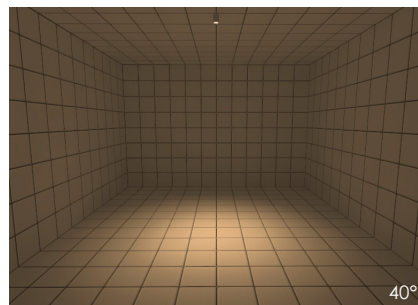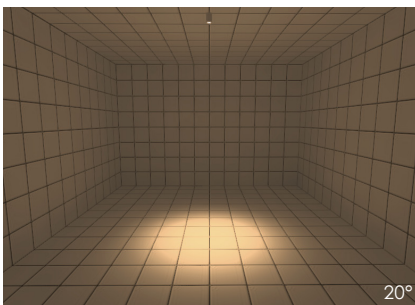

Ordering Part No.

A-SD11095-18W-ND-20D-930-WH-R1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-SD11095	18W	ND Non Dim	20D 20°	930 90&3000K	WH White	R1 Mirror Silver		IP20 blank
A-SD11095-65 (IP65 solution)		TD Triac Dim	40D 40°	940 90&4000K	BK Black	R2 Mirror Black		IP65
		VD 1-10V Dim		830 80&3000K		R3 Mirror Gold		
		DD DALI Dim		840 80&4000K				

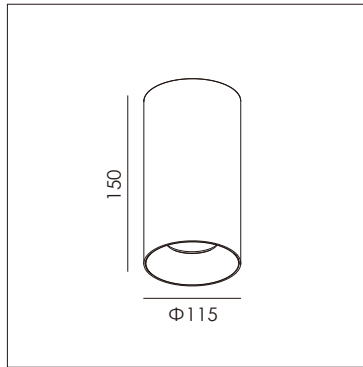

Power: 25W@36V/650mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 20°/40°

Lumen output: 1750lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black

Reflector color: Mirror Silver/Mirror Black

Size: Dia115×H150mm



Cut-out: None

IP rating: IP20/IP65





Mirror Silver R1 Mirror Black R2

Photometric Data

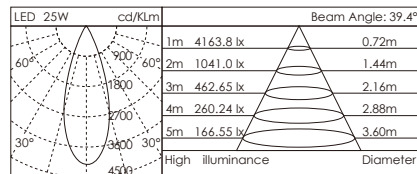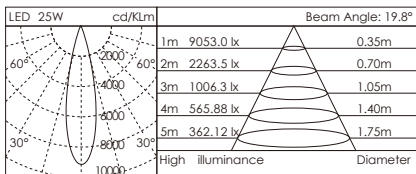


Light Performance

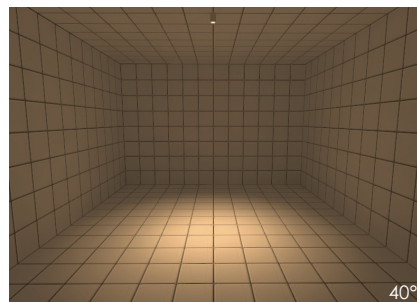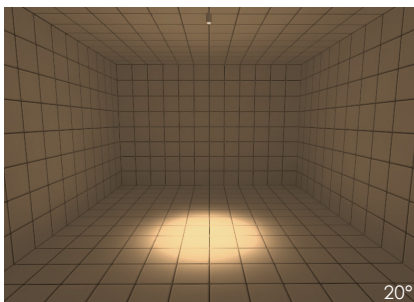

Ordering Part No.

A-SD11115-25W-ND-20D-930-WH-R1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-SD11115	25W	ND Non Dim	20D 20°	930 90&3000K	WH White	R1 Mirror Silver		IP20 blank
A-SD11115-65 (IP65 solution)		TD Triac Dim	40D 40°	940 90&4000K	BK Black	R2 Mirror Black		IP65
		VD 1-10V Dim		830 80&3000K		R3 Mirror Gold		
		DD DALI Dim		840 80&4000K				

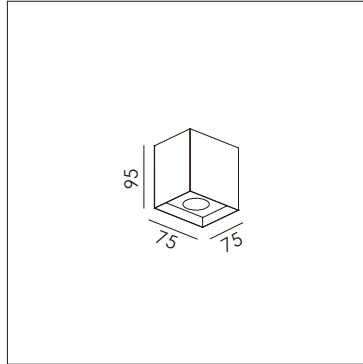

Power: 10W@36V/250mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 20°/40°

Lumen output: 700lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black



Reflector color: White/ Black

Size: 75×75×H95mm



Cut-out: None

IP rating: IP20

Photometric Data

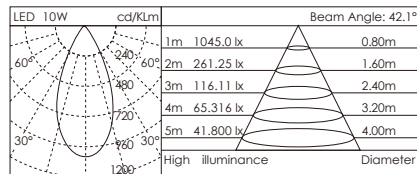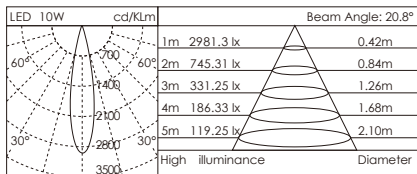


Light Performance

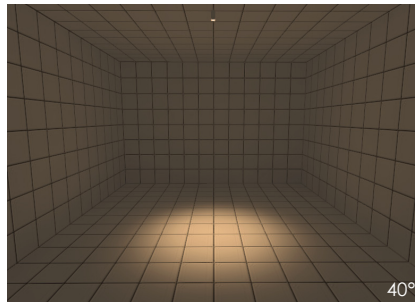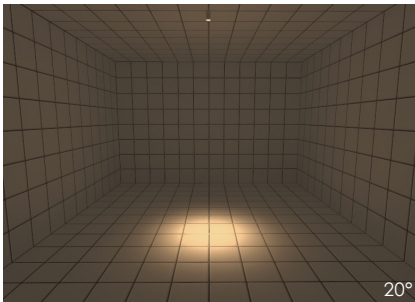

Ordering Part No.

A-SD51075-1-10W-ND-20D-930-WH-R1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-SD51075-1	10W	ND Non Dim	20D 20°	930 90&3000K	WH White	R1 Mirror Silver		IP20 blank
		TD Triac Dim	40D 40°	940 90&4000K	BK Black	R2 Mirror Black		
		VD 1-10V Dim		830 80&3000K				
		DD DALI Dim		840 80&4000K				

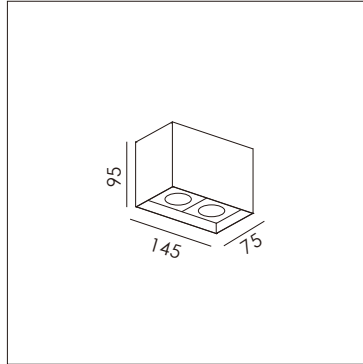

Power: 10W×2@36V/250mA×2

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 20°/40°

Lumen output: 1400lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black



Reflector color: White/ Black

Size: 145×75×H95mm



Cut-out: None

IP rating: IP20

Photometric Data

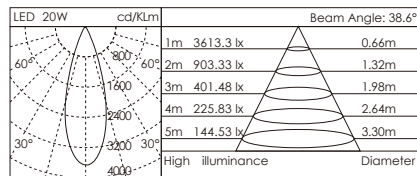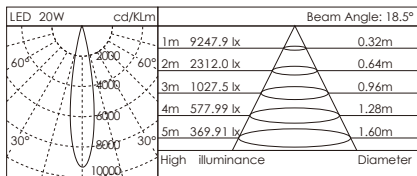


Light Performance

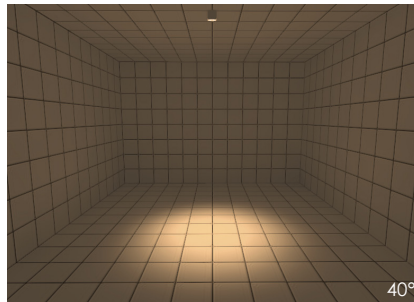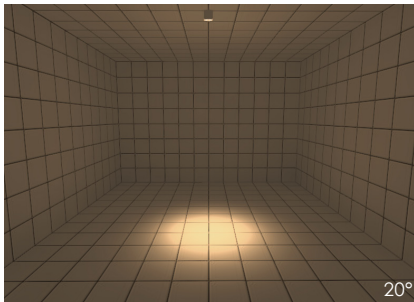

Ordering Part No.

A-SD51075-2-10W×2-ND-20D-930-WH-R1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-SD51075-2	10W×2	ND Non Dim	20D 20°	930 90&3000K	WH White	R1 Mirror Silver		IP20 blank
		TD Triac Dim	40D 40°	940 90&4000K	BK Black	R2 Mirror Black		
		VD 1-10V Dim		830 80&3000K				
		DD DALI Dim		840 80&4000K				

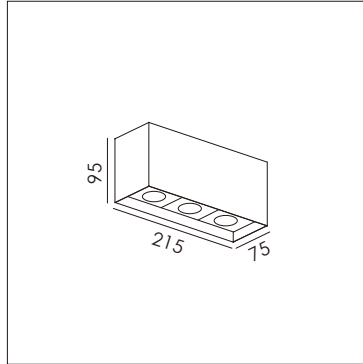

Power: 10W×3@36V/250mA×3

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 20°/40°

Lumen output: 2100lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black



Reflector color: White/ Black

Size: 215×75×H95mm



Cut-out: None

IP rating: IP20

Photometric Data

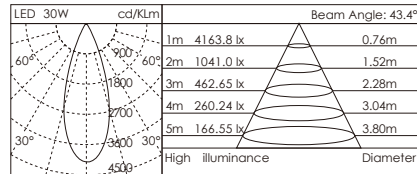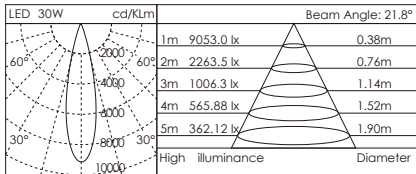


Light Performance

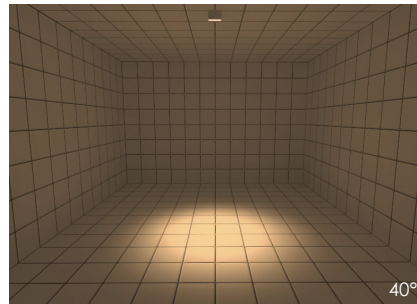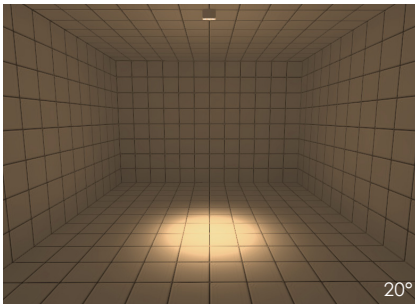

Ordering Part No.

A-SD51075-3-10W×3-ND-15D-930-WH-R1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-SD51075-3	10W×3	ND Non Dim	20D 20°	930 90&3000K	WH White	R1 Mirror Silver		IP20 blank
		TD Triac Dim	40D 40°	940 90&4000K	BK Black	R2 Mirror Black		
		VD 1-10V Dim		830 80&3000K				
		DD DALI Dim		840 80&4000K				

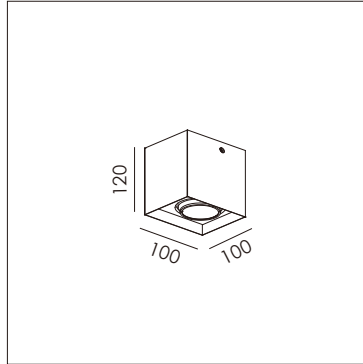

Power: 9W/15W@36V/200mA / 36V/350mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°/50°

Lumen output: 720lm/1200lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black




Reflector color: Black

Size: 100×100×H120mm




Cut-out: None

IP rating: IP20

Photometric Data

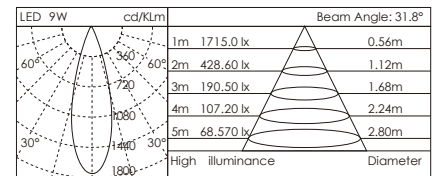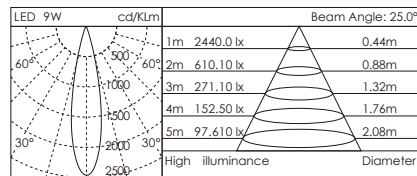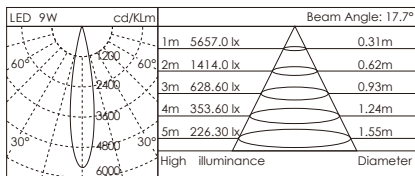


Light Performance

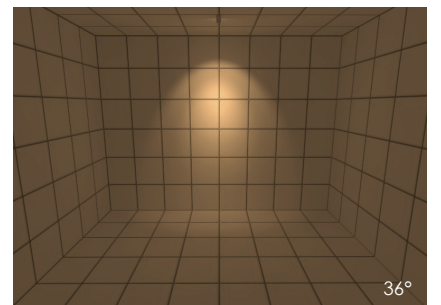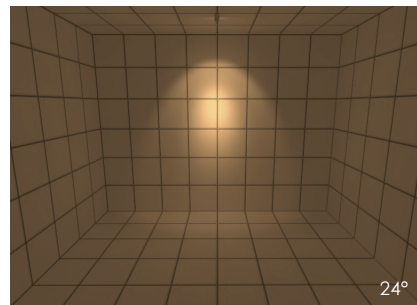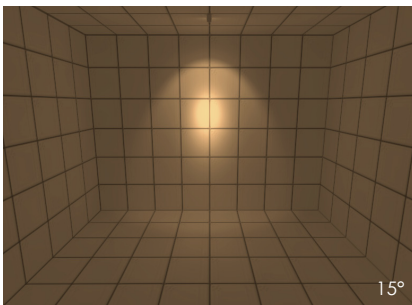

Ordering Part No.

A-SD32100-1-15W-ND-15D-930-WH

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-SD32100-1	9W	ND Non Dim	15D 15°	930 90&3000K	WH White			IP20 blank
	15W	TD Triac Dim	24D 24°	940 90&4000K	BK Black			
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim	50D 50°	840 80&4000K				

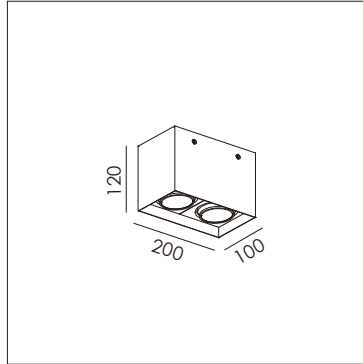

Power: 9W×2/15W×2@36V/200mA×2 / 36V/350mA×2

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°/50°

Lumen output: 2400lm@3000K/15W×2

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black




Reflector color: Black

Size: 200×100×H120mm

Cut-out: None

IP rating: IP20


Photometric Data

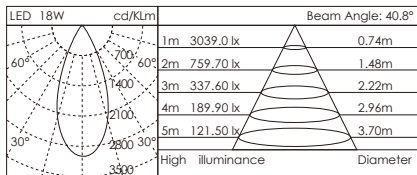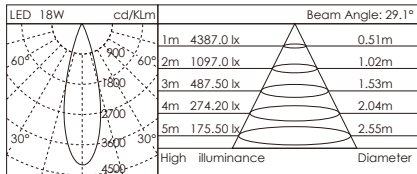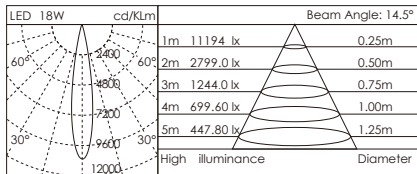

Ordering Part No.

A-SD32100-2-15W×2-ND-15D-930-WH

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-SD32100-2	9W×2	ND Non Dim	15D 15°	930 90&3000K	WH White			IP20 blank
	15W×2	TD Triac Dim	24D 24°	940 90&4000K	BK Black			
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim	50D 50°	840 80&4000K				

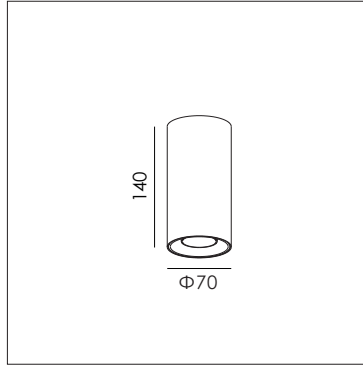

Power: 9W@36V/200mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 600lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black




Reflector color: Matt Black

Size: Dia70×H140mm




Cut-out: None

IP rating: IP20

Photometric Data

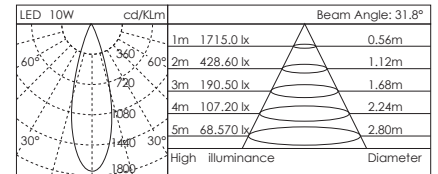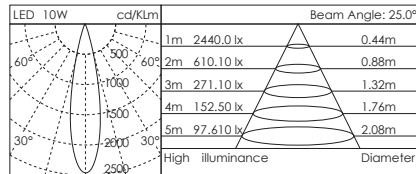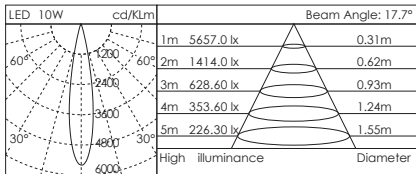


Light Performance

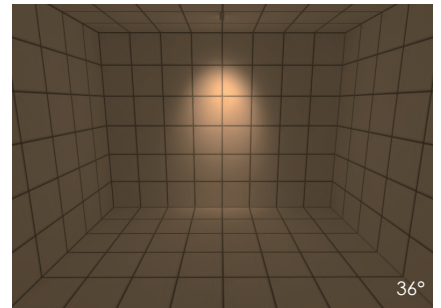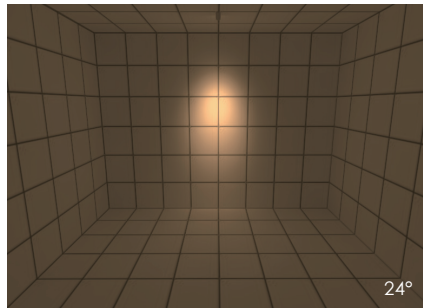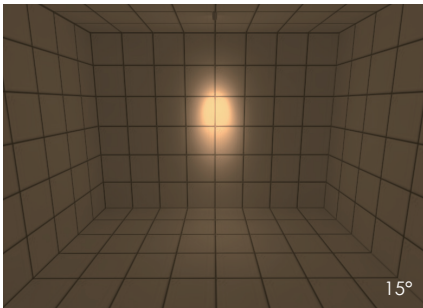

Ordering Part No.

A-SD42070 9W-ND-15D-930-WH-R5

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-SD42070	9W	ND Non Dim	15D 15°	930 90&3000K	WH White	R5 Matt Black		IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black			
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

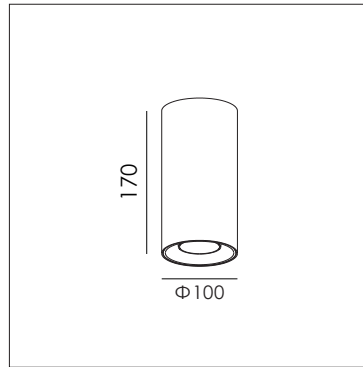

Power: 15W@36V/350mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 1000lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black




Reflector color: Matt Black

Size: Dia100×H170mm




Cut-out: None

IP rating: IP20

Photometric Data

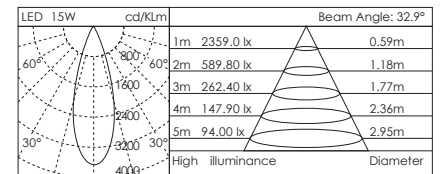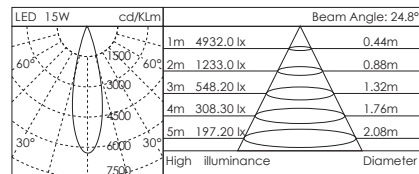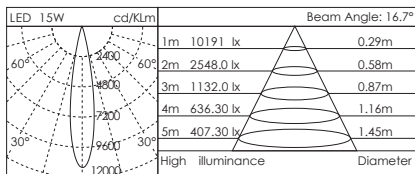



Light Performance

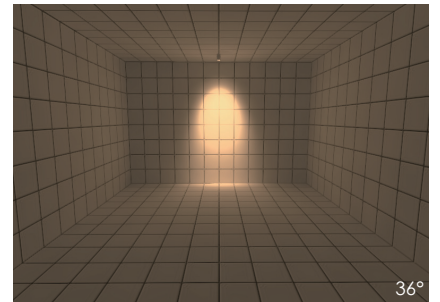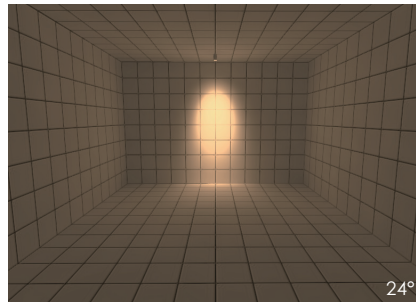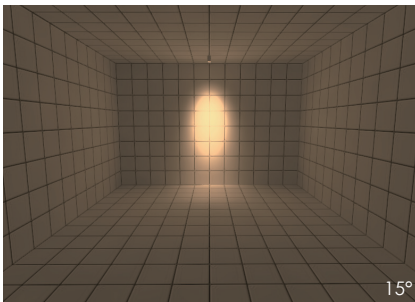

Ordering Part No.

A-SD42100-15W-ND-15D-930-WH-R5

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-SD42100	15W	ND Non Dim	15D 15°	930 90&3000K	WH White	R5 Matt Black		IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black			
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

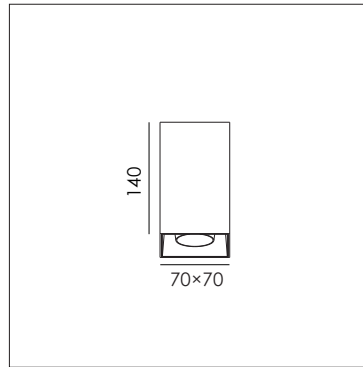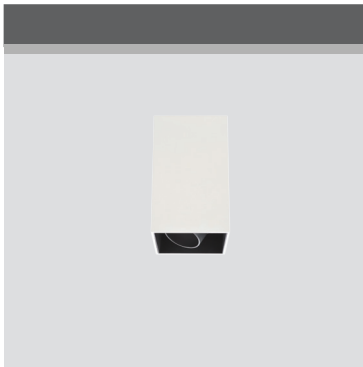

Power: 9W@36V/200mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 600lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black




Reflector color: Matt Black

Size: 70×70×H140mm




Cut-out: None

IP rating: IP20

Photometric Data

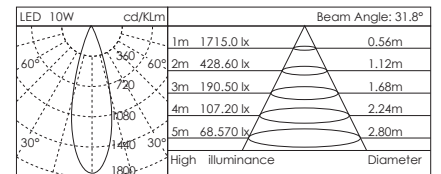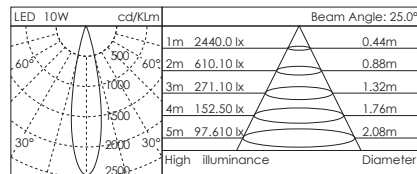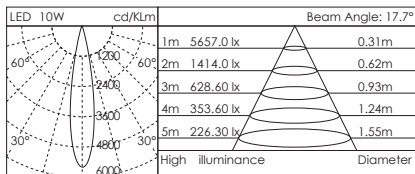



Light Performance

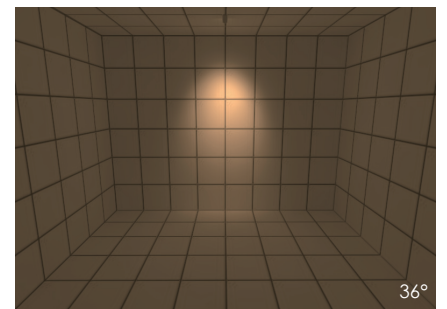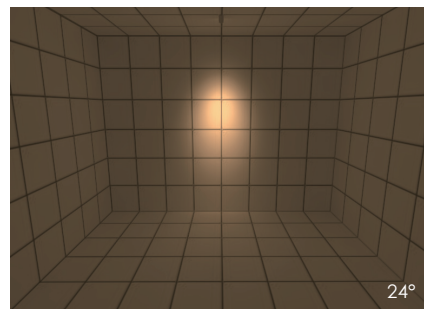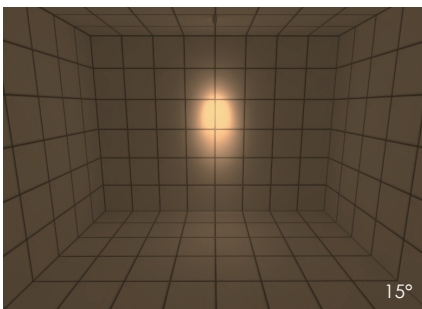

Ordering Part No.

A-SD42070S 9W-ND-15D-930-WH-R5

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-SD42070S	9W	ND Non Dim	15D 15°	930 90&3000K	WH White	R5 Matt Black		IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black			
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

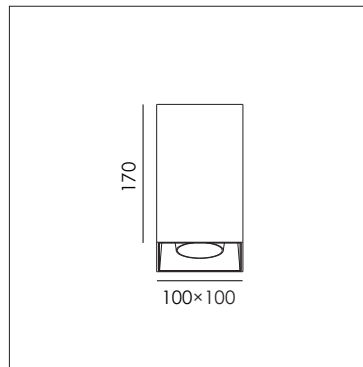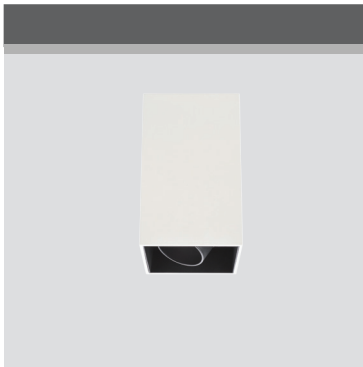

Power: 15W@36V/350mA

CCT: 2700K/3000K/4000K/5000K/6500K

CRI: 80/90

Beam angle: 15°/24°/36°

Lumen output: 1000lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Triac/1-10V/DALI

Material: Aluminum

Finishing color: White/Black




Reflector color: Matt Black

Size: 100×100×H170mm




Cut-out: None

IP rating: IP20

Photometric Data

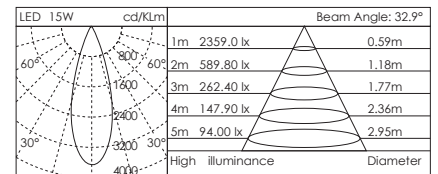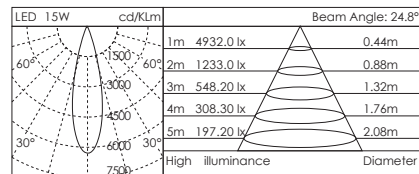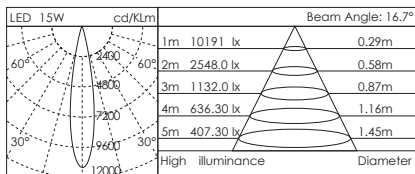



Light Performance

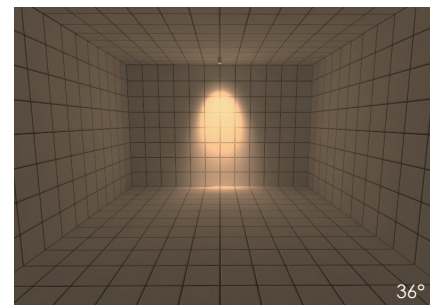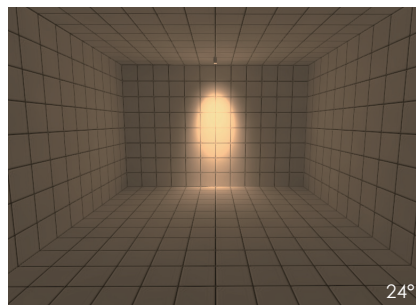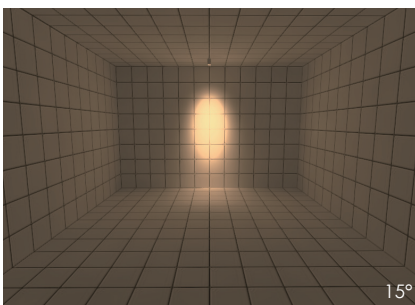

Ordering Part No.

A-SD42100S-15W-ND-15D-930-WH-R5

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-SD42100S	15W	ND Non Dim	15D 15°	930 90&3000K	WH White	R5 Matt Black		IP20 blank
		TD Triac Dim	24D 24°	940 90&4000K	BK Black			
		VD 1-10V Dim	36D 36°	830 80&3000K				
		DD DALI Dim		840 80&4000K				

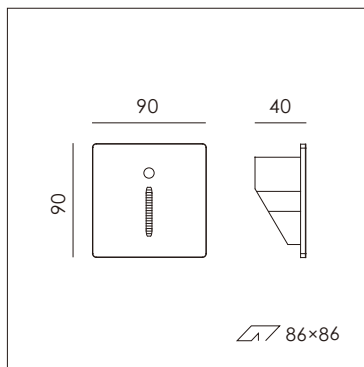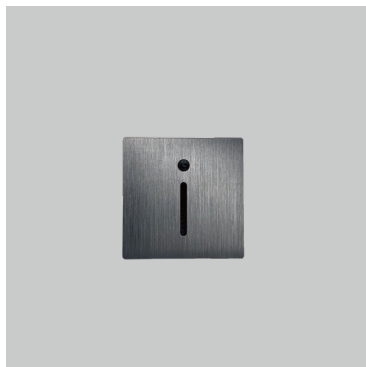

Power: 3W

CCT: 2700K/3000K/4000K

CRI: 80/90

Beam angle: Asymmetric

Lumen output: 30lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim/Human Sensor/Human & Light Sensor

Material: Aluminum & Magnet

Finishing color: White/Black/Grey


Sensor: 3 meter distance/40 seconds time

Size: 90×90×H40mm

Cut-out: 86×86mm

IP rating: IP20


Magnetic Cover




R1




R2




R3



R4









R5



R6


Light Performance

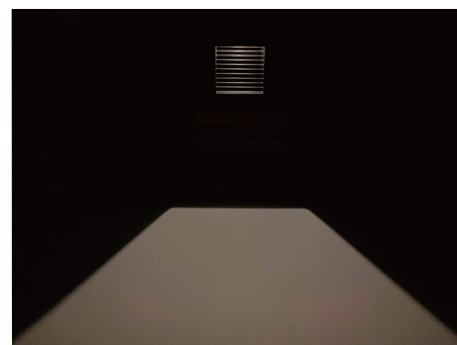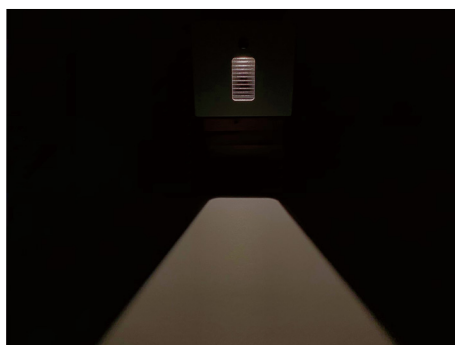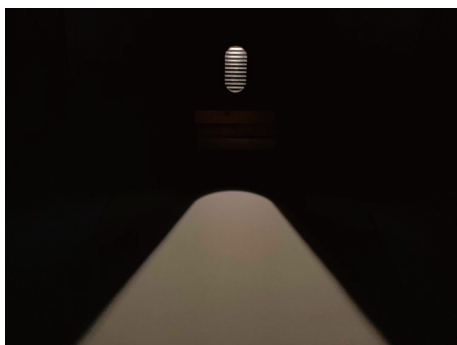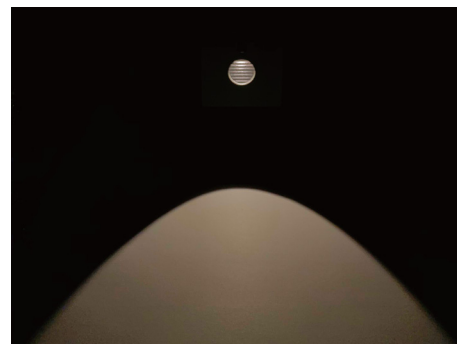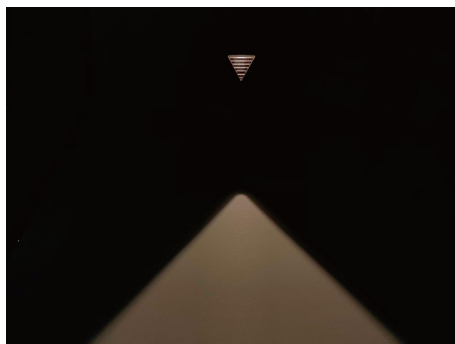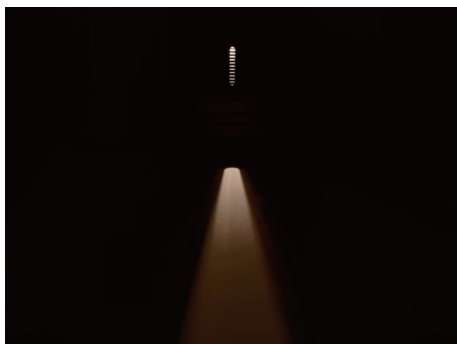

Ordering Part No.

A-RWL1087-3W-ND-930-WH-R1

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Cover	IP rating
A-RWL1087	3W	ND Non Dim	ASY Asymmetric	930 90&3000K	WH White	R1 I cover	IP20 blank
		HS Human Sensor		940 90&4000K	BK Black	R2 Triangle cover	
		HLS Human & Light Sensor		830 80&3000K	GR Grey	R3 Round cover	
				840 80&4000K			

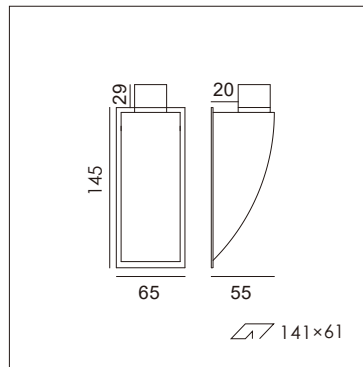

Power: 3W

CCT: 2700K/3000K/4000K

CRI: 80/90

Beam angle: 120°

Lumen output: 40lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim

Material: Aluminum

Finishing color: White/Black

Reflector color: Matt Black

Size: 145×65×H55mm

Cut-out: 141×61mm

IP rating: IP20


Light Performance



Ordering Part No.

A-RWL2065-3W-ND-120D-930-WH

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-RWL2065	3W	ND Non Dim	120D 120°	930 90&3000K	WH White			IP20 blank
				940 90&4000K	BK Black			
				830 80&3000K				
				840 80&4000K				

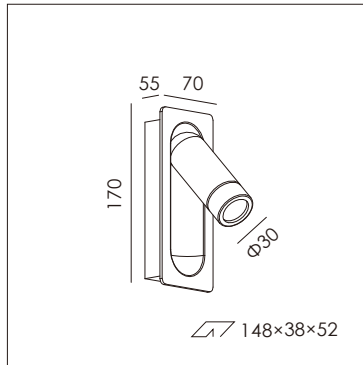

Power: 3W

CCT: 2700K/3000K/4000K

CRI: 80/90

Beam angle: 30°

Lumen output: 120lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim

Material: Aluminum

Finishing color: White/Black/Satin Nickel/Bronze

Size: 170×70×H55mm

Cut-out: 148×38×52mm

IP rating: IP20


Light Performance



Ordering Part No.

A-RWL3070A-3W-ND-30D-930-WH

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-RWL3070A	3W	ND Non Dim	30D 30°	930 90&3000K	WH White			IP20 blank
				940 90&4000K	BK Black			
				830 80&3000K				
				840 80&4000K				

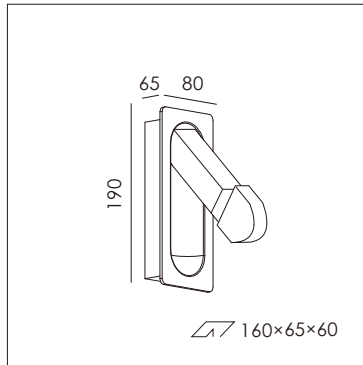

Power: 3W

CCT: 2700K/3000K/4000K

CRI: 80/90

Beam angle: 30°

Lumen output: 120lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim

Material: Aluminum

Finishing color: White/Black/Satin Nickel/Bronze

Size: 190×80×65mm

Cut-out: 160×65×60mm

IP rating: IP20


Light Performance



Ordering Part No.

A-RWL3080B-3W-ND-30D-930-WH

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-RWL3080B	3W	ND Non Dim	30D 30°	930 90&3000K	WH White			IP20 blank
				940 90&4000K	BK Black			
				830 80&3000K				
				840 80&4000K				

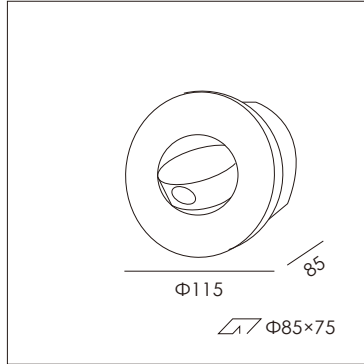

Power: 3W

CCT: 2700K/3000K/4000K

CRI: 80/90

Beam angle: 30°

Lumen output: 120lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim

Material: Aluminum

Finishing color: White/Black/Satin Nickel/Bronze

Size: Dia115×85mm

Cut-out: Dia85×75mm

IP rating: IP20


Light Performance



Ordering Part No.

A-RWL4115-3W-ND-30D-930-WH

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-RWL4115	3W	ND Non Dim	30D 30°	930 90&3000K	WH White			IP20 blank
				940 90&4000K	BK Black			
				830 80&3000K				
				840 80&4000K				

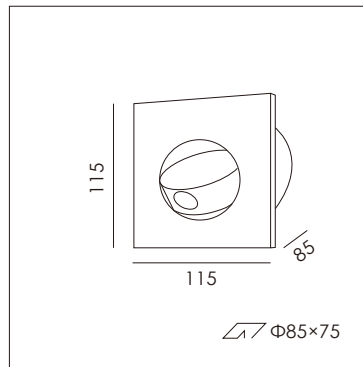

Power: 3W

CCT: 2700K/3000K/4000K

CRI: 80/90

Beam angle: 30°

Lumen output: 120lm@3000K

Input voltage: AC 220-240V

Driver: Non-dim

Material: Aluminum

Finishing color: White/Black/Satin Nickel/Bronze

Size: 115×115×85mm

Cut-out: Dia85×75mm

IP rating: IP20


Light Performance



Ordering Part No.

A-RWL4115S-3W-ND-30D-930-WH

Model	Power	Control	Beam angle	CRI&CCT	Finishing color	Reflector color	Accessory	IP rating
A-RWL4115S	3W	ND Non Dim	30D 30°	930 90&3000K	WH White			IP20 blank
				940 90&4000K	BK Black			
				830 80&3000K				
				840 80&4000K				



AMAZ LIGHT

LIGHTING SOLUTION PROVIDER