



10/2024

AMAZ Light Tech Co., LTD.

WhatsApp: 86-158 1253 6070

Email: sales@amazlight.com


http: //www.amazlight.com

Add: No.2,Shengfengxingxiang Street, Xiaolan Town, Zhongshan, Guangdong,China.


Zip Code: 528415



LED Track Spot Light



A-T02B028



A-T03B036




On/Off



DALI Dimming



CASAMBI

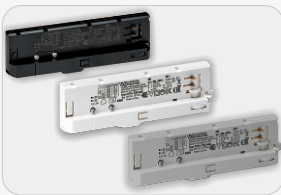

Vossloh-Schwabe Easyline
GEN.3




Alanod Segment Reflector
Efficiency 98%




Pushing LED Holder

Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-T02B028	30W	220-240V 50/60Hz	830	4080lm 145lm/W	18°/24°/40°/60° (Aluminum)	White Black Gray	High Pure Aluminum
			840	4500lm 160lm/W			
			930	3900lm 138lm/W			
			940	4250lm 150lm/W			
A-T03B036	36W	220-240V 50/60Hz	830	5080lm 140lm/W	17°/24°/36°/60° (Aluminum)	White Black Gray	High Pure Aluminum
			840	5600lm 155lm/W			
			930	4800lm 133lm/W			
			940	5250lm 145lm/W			

LED Track Spot Light



A-T01F030



A-T01F036



On/Off




DALI Dimming




CASAMBI

Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-T01F030	30W	220-240V 50/60Hz	830	3300lm 110lm/W	15°/24°/40°/60° (Aluminum)	White Black Gray	High Pure Aluminum
			840	3450lm 115lm/W			
			930	3000lm 100lm/W			
			940	3300lm 110lm/W			
A-T01F036	36W	220-240V 50/60Hz	830	3960lm 110lm/W	15°/24°/36°/60° (Aluminum)	White Black Gray	High Pure Aluminum
			840	4140lm 115lm/W			
			930	3600lm 100lm/W			
			940	3960lm 110lm/W			


LED Track Spot Light



A-T02A028



A-T03A036



Vossloh-Schwabe Easyline
GEN.3



Alanod Segment Reflector
Efficiency 98%



Pushing LED Holder



On/Off




DALI Dimming




CASAMBI

Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-T02A028	30W	220-240V 50/60Hz	830	4080lm 145lm/W	18°/24°/40°/60° (Aluminum)	White Black Gray	High Pure Aluminum
			840	4500lm 160lm/W			
			930	3900lm 138lm/W			
			940	4250lm 150lm/W			
A-T03A036	36W	220-240V 50/60Hz	830	5080lm 140lm/W	17°/24°/36°/60° (Aluminum)	White Black Gray	High Pure Aluminum
			840	5600lm 155lm/W			
			930	4800lm 133lm/W			
			940	5250lm 145lm/W			


LED Track Spot Light



A-T01C025



A-T01C035



A-T01C042



On/Off






DALI Dimming




CASAMBI

Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-T01C025	25W	220-240V 50/60Hz	830	3400lm 135lm/W	15°/24°/36°/45°/60° (PC)	White Black Gray	Die-Casting Aluminum
			840	3580lm 140lm/W			
			930	2800lm 110lm/W			
			940	2980lm 115lm/W			
A-T01C035	35W	220-240V 50/60Hz	830	4580lm 130lm/W	15°/24°/36°/45°/60° (PC)	White Black Gray	Die-Casting Aluminum
			840	4800lm 135lm/W			
			930	3680lm 105lm/W			
			940	3900lm 110lm/W			
A-T01C042	42W	220-240V 50/60Hz	830	4880lm 115lm/W	15°/24°/36°/45°/60° (PC)	White Black Gray	Die-Casting Aluminum
			840	5100lm 120lm/W			
			930	4200lm 100lm/W			
			940	4410lm 105lm/W			


LED Track Spot Light




A-T01G010



A-T01G020





A-T01G030




A-T01G040

Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-T01G010	10W	220-240V 50/60Hz	830	1100lm 110lm/W	10°-55°(Zoomable)	White Black	High Pure Aluminum
			840	1150lm 115lm/W			
			930	900lm 90lm/W			
			940	950lm 95lm/W			
A-T01G020	20W	220-240V 50/60Hz	830	2200lm 110lm/W	10°-55°(Zoomable)	White Black	High Pure Aluminum
			840	2300lm 115lm/W			
			930	1800lm 90lm/W			
			940	1900lm 95lm/W			
A-T01G030	30W	220-240V 50/60Hz	830	3300lm 110lm/W	10°-55°(Zoomable)	White Black	High Pure Aluminum
			840	3450lm 115lm/W			
			930	2700lm 90lm/W			
			940	2850lm 95lm/W			
A-T01G036	36W	220-240V 50/60Hz	830	3600lm 110lm/W	10°-55°(Zoomable)	White Black	High Pure Aluminum
			840	4140lm 115lm/W			
			930	3240lm 90lm/W			
			940	3420lm 95lm/W			


LED Track Spot Light




A-T02G010



A-T02G020




A-T02G030




A-T02G040

Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-T02G010	10W	220-240V 50/60Hz	830	1100lm 110lm/W	10°-55°(Zoomable)	White Black	High Pure Aluminum
			840	1150lm 115lm/W			
			930	900lm 90lm/W			
			940	950lm 95lm/W			
A-T02G020	20W	220-240V 50/60Hz	830	2200lm 110lm/W	10°-55°(Zoomable)	White Black	High Pure Aluminum
			840	2300lm 115lm/W			
			930	1800lm 90lm/W			
			940	1900lm 95lm/W			
A-T02G030	30W	220-240V 50/60Hz	830	3300lm 110lm/W	10°-55°(Zoomable)	White Black	High Pure Aluminum
			840	3450lm 115lm/W			
			930	2700lm 90lm/W			
			940	2850lm 95lm/W			
A-T02G036	36W	220-240V 50/60Hz	830	3600lm 110lm/W	10°-55°(Zoomable)	White Black	High Pure Aluminum
			840	4140lm 115lm/W			
			930	3240lm 90lm/W			
			940	3420lm 95lm/W			


LED Track Spot Light




EL-T21D010/20/30/40




A-T21B010



A-T21B020



A-T21B030



A-T21B040

Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-T21B010	10W	220-240V 50/60Hz	830	1150lm 115lm/W	15°/24°/36° (Aluminum)	White Black	High Pure Aluminum
			840	1200lm 120lm/W			
			930	1000lm 100lm/W			
			940	1150lm 115lm/W			
A-T21B020	20W	220-240V 50/60Hz	830	2300lm 115lm/W	15°/28°/40° (Aluminum)	White Black	High Pure Aluminum
			840	2400lm 120lm/W			
			930	2000lm 100lm/W			
			940	2300lm 115lm/W			
A-T21B030	30W	220-240V 50/60Hz	830	4200lm 140lm/W	15°/28°/40°/60° (Aluminum)	White Black	High Pure Aluminum
			840	4650lm 155lm/W			
			930	3990lm 133lm/W			
			940	4350lm 145lm/W			
A-T21B040	40W	220-240V 50/60Hz	830	5460lm 140lm/W	15°/24°/36°/60° (Aluminum)	White Black	High Pure Aluminum
			840	6200lm 155lm/W			
			930	5320lm 133lm/W			
			940	5800lm 145lm/W			



LED Track Spot Light



A-T08A028
LED
2700K 3000K 3500K 4000K
Ra≥80,Ra≥90, MacAdam 3
130lm/W
Driver
Non-dim /DALI dim
Input Voltage: 220-240V/50-60Hz
Output:DC36V 700mA

System Power(W)
28W/3680lm



Lifetime
Up to L80/50.000h

Optic
Reflector: 15°, 24°, 36°, 60°(PMMA)



Flexibility
rotatable up to 355°, adjustable up to 90°

Housing
Die-Casting Aluminum


Colour
White,Black,Gray

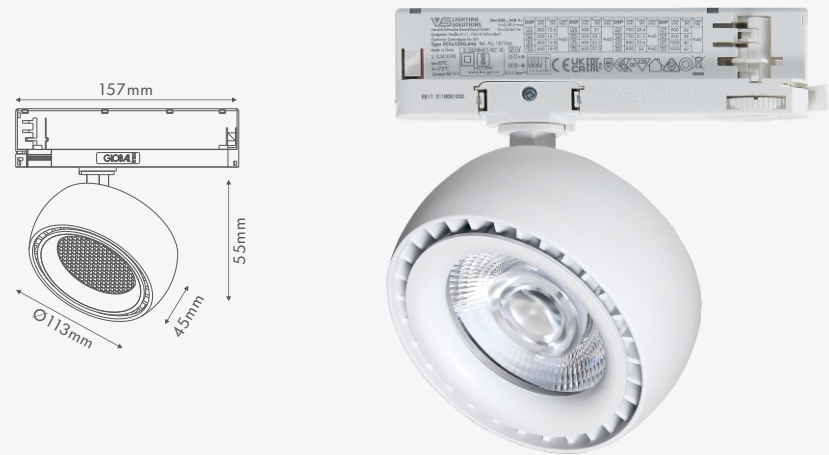


LED Linear Track Light

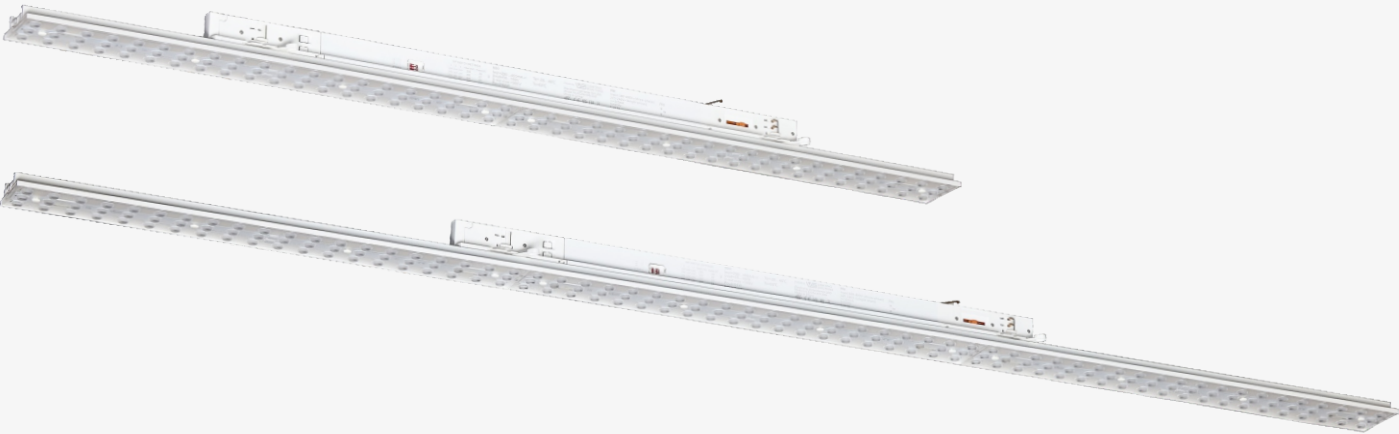

A-TL5B040 (40W)




A-TL5B060 (60W)

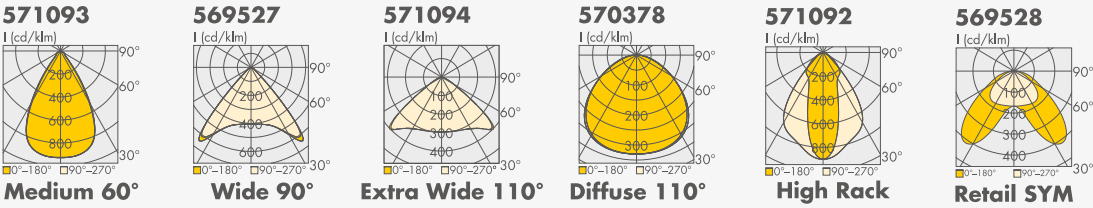


Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-TL5B040	40W	220-240V 50/60Hz	830	6200lm 155lm/W	Medium 60° (PMMA)	White Black	Aluminum
			840	6600lm 165lm/W	Wide 90° (PMMA)		
			930	5400lm 135lm/W	Extra Wide 110° (PMMA)		
			940	5800lm 145lm/W	Diffuse 110° (PMMA) High Rack (PMMA) Retail SYM (PMMA)		
A-TL5B060	60W	220-240V 50/60Hz	830	9300lm 155lm/W	Medium 60° (PMMA)	White Black	Aluminum
			840	9600lm 160lm/W	Wide 90° (PMMA)		
			930	8100lm 135lm/W	Extra Wide 110° (PMMA)		
			940	8700lm 145lm/W	Diffuse 110° (PMMA) High Rack (PMMA) Retail SYM (PMMA)		




LED Linear Track Light



A-TL5C040 (40W)




A-TL5C060 (60W)





Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-TL5C040	40W	220-240V 50/60Hz	830	4400lm 110lm/W	120° (PC)	White Black	Aluminum
			840	4800lm 120m/W			
			930	4000lm 100lm/W			
			940	4400lm 110m/W			
A-TL5C060	60W	220-240V 50/60Hz	830	6600lm 110lm/W	120° (PC)	White Black	Aluminum
			840	7200lm 120m/W			
			930	6000lm 100lm/W			
			940	6600lm 110m/W			



LED Linear Track Light

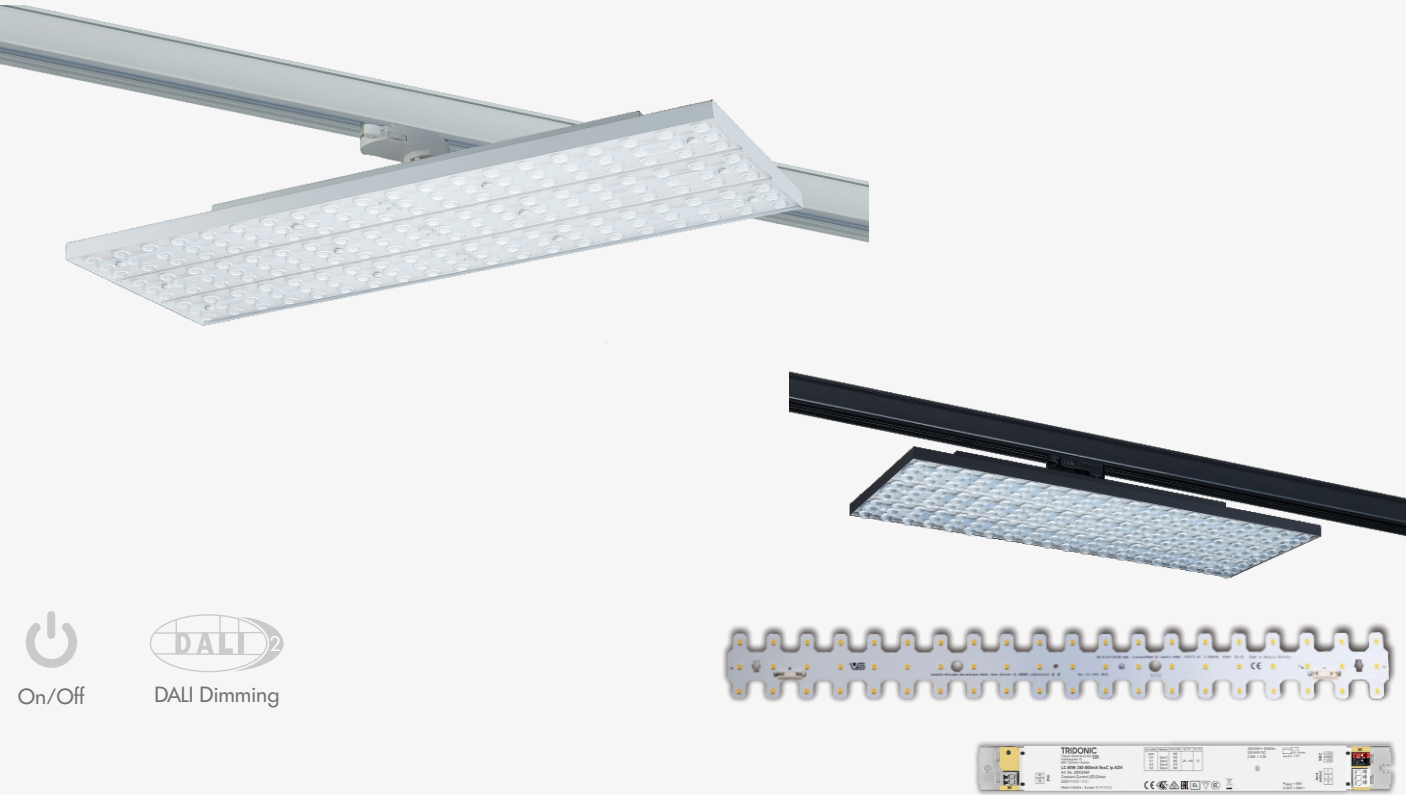

On/Off DALI Dimming

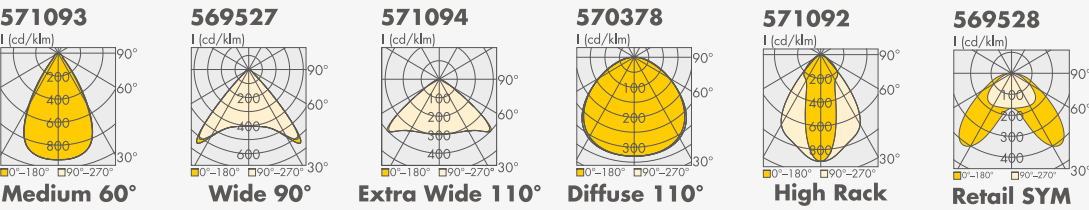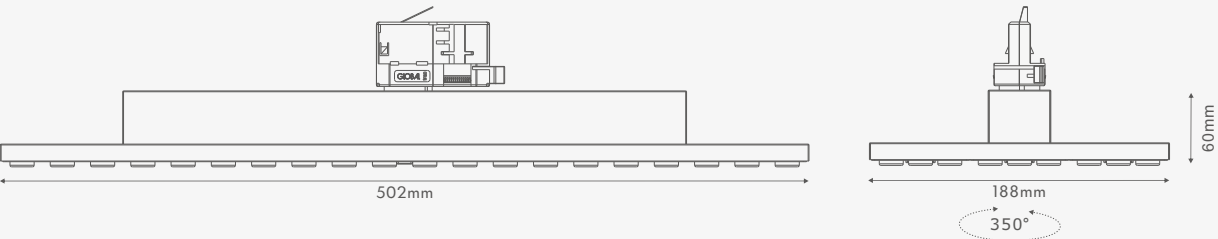



Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-TL8A060	60W	220-240V 50/60Hz	830	9300lm 155lm/W	Medium 60° (PMMA)	White Black	Iron
			840	9900lm 165lm/W	Wide 90° (PMMA)		
			930	8100lm 135lm/W	Extra Wide 110° (PMMA)		
			940	8700lm 145lm/W	Diffuse 110° (PMMA)		
A-TL8A072	72W	220-240V 50/60Hz	830	11160lm 155lm/W	High Rack (PMMA)	White Black	Iron
			840	11520lm 160lm/W	Retail SYM (PMMA)		
			930	9720lm 135lm/W	Medium 60° (PMMA)		
			940	10440lm 145lm/W	Wide 90° (PMMA)		



LED Linear Track Light





On/Off DALI Dimming

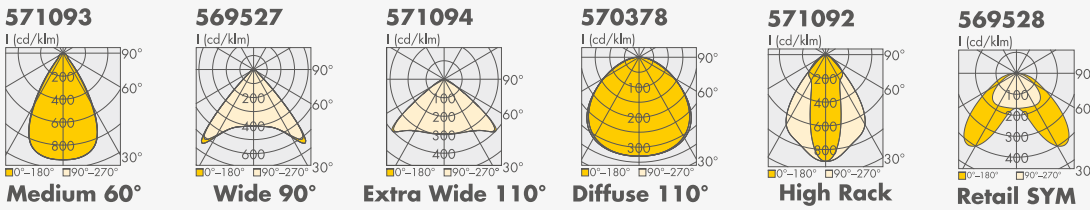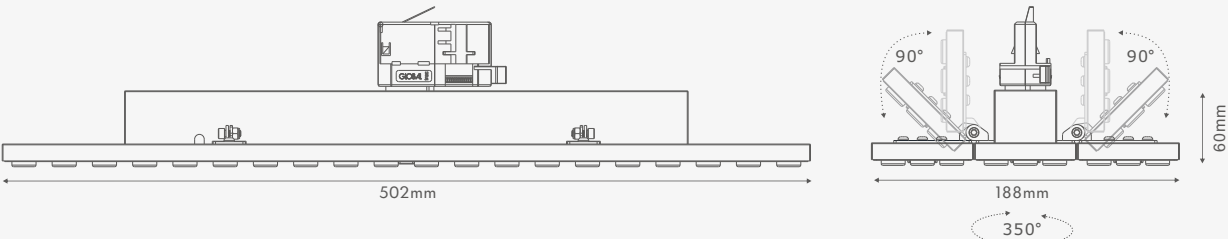

Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-TL8B060	60W	220-240V 50/60Hz	830	9300lm 155lm/W	Medium 60° (PMMA)	White Black	Iron
			840	9900lm 165lm/W	Wide 90° (PMMA)		
			930	8100lm 135lm/W	Extra Wide 110° (PMMA)		
			940	8700lm 145lm/W	Diffuse 110° (PMMA)		
A-TL8B072	72W	220-240V 50/60Hz	830	11160lm 155lm/W	High Rack (PMMA)	White Black	Iron
			840	11520lm 160lm/W	Retail SYM (PMMA)		
			930	9720lm 135lm/W	Medium 60° (PMMA)		
			940	10440lm 145lm/W	Wide 90° (PMMA)		






LED Linear Track Light

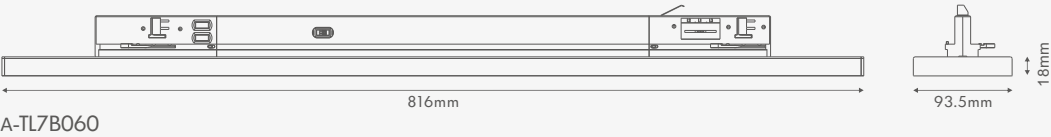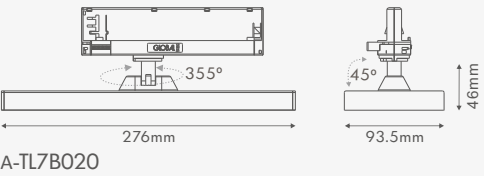



Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-TL7B020	20W	220–240V 50/60Hz	830	2900lm 145lm/W	60°(pc) 85°(pc)	White Black	Aluminum
			840	2700lm 135lm/W			
			930	2600lm 130lm/W			
			940	2400lm 120lm/W			
A-TL7B060	60W	220–240V 50/60Hz	830	8700lm 145lm/W	60°(pc) 85°(pc)	White Black	Aluminum
			840	8100lm 135lm/W			
			930	7800lm 130lm/W			
			940	7200lm 120lm/W			

LED Linear Track Light

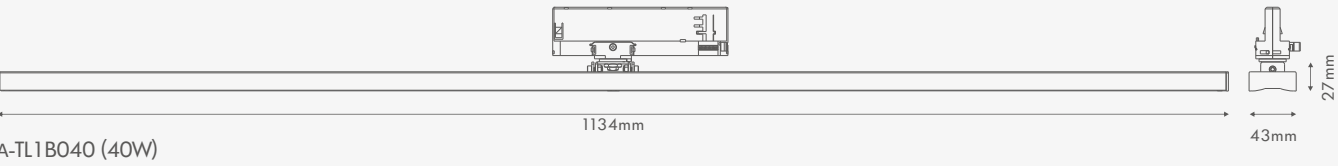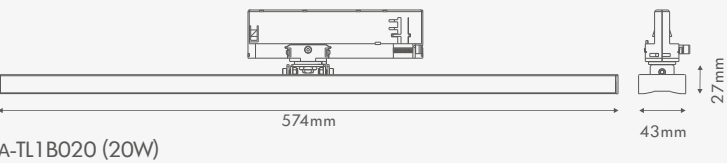


Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-TL1B020	20W	220–240V 50/60Hz	830	2200lm 110lm/W	36x70° (PMMA) P20°(PMMA)	White Black	Aluminum
			840	2400lm 120m/W			
			930	2000lm 100lm/W			
			940	2200lm 110m/W			
A-TL1B040	40W	220–240V 50/60Hz	830	4400lm 110lm/W	36x70° (PMMA) P20°(PMMA)	White Black	Aluminum
			840	4800lm 120m/W			
			930	4000lm 100lm/W			
			940	4400lm 110m/W			

LED Trunking System

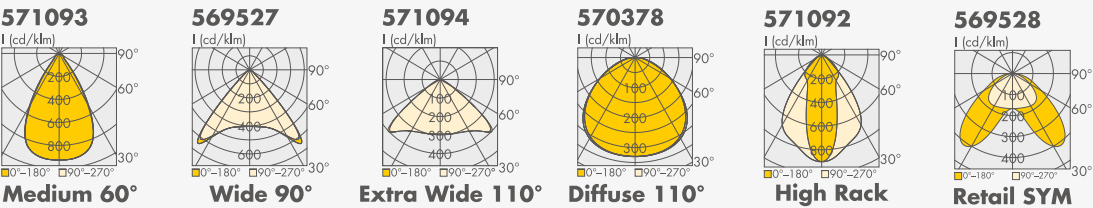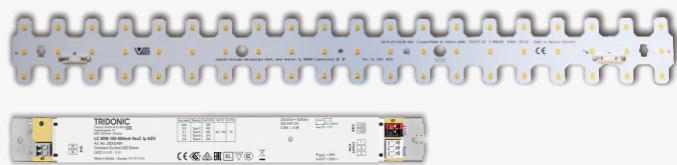



Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-L05B030	30W	220-240V 50/60Hz	830	4060lm 135lm/W	15°/24°/36°/45°/60° (PC)	White Black	Aluminum
			840	4280lm 142lm/W			
			930	3400lm 113lm/W			
			940	3600lm 119lm/W			
A-L05A030	30W	220-240V 50/60Hz	830	5200lm 170lm/W	Medium 60° (PMMA) Wide 90° (PMMA) Extra Wide 110° (PMMA) Diffuse 110° (PMMA) High Rack (PMMA) Retail SYM (PMMA)	White Black	Aluminum
			840	5300lm 175lm/W			
			930	4280lm 142lm/W			
			940	4550lm 150lm/W			
A-L05A045	45W	220-240V 50/60Hz	830	7680lm 170lm/W	Medium 60° (PMMA) Wide 90° (PMMA) Extra Wide 110° (PMMA) Diffuse 110° (PMMA) High Rack (PMMA) Retail SYM (PMMA)	White Black	Aluminum
			840	7900lm 175lm/W			
			930	6400lm 142lm/W			
			940	6800lm 150lm/W			

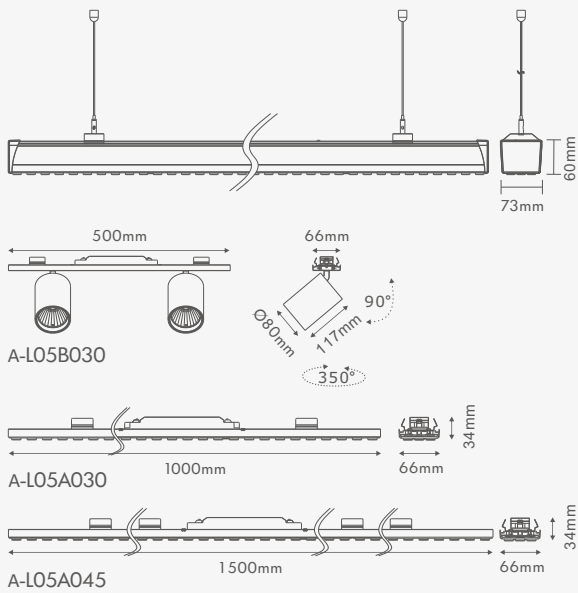

LED Linear Light




Types

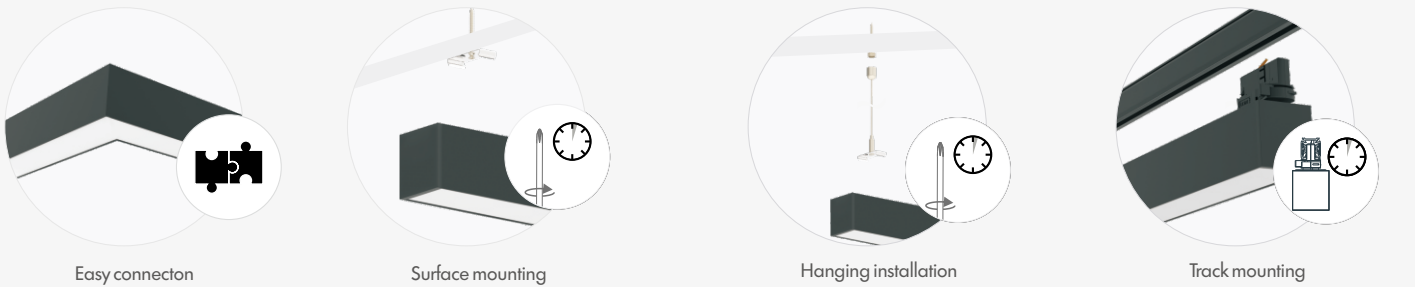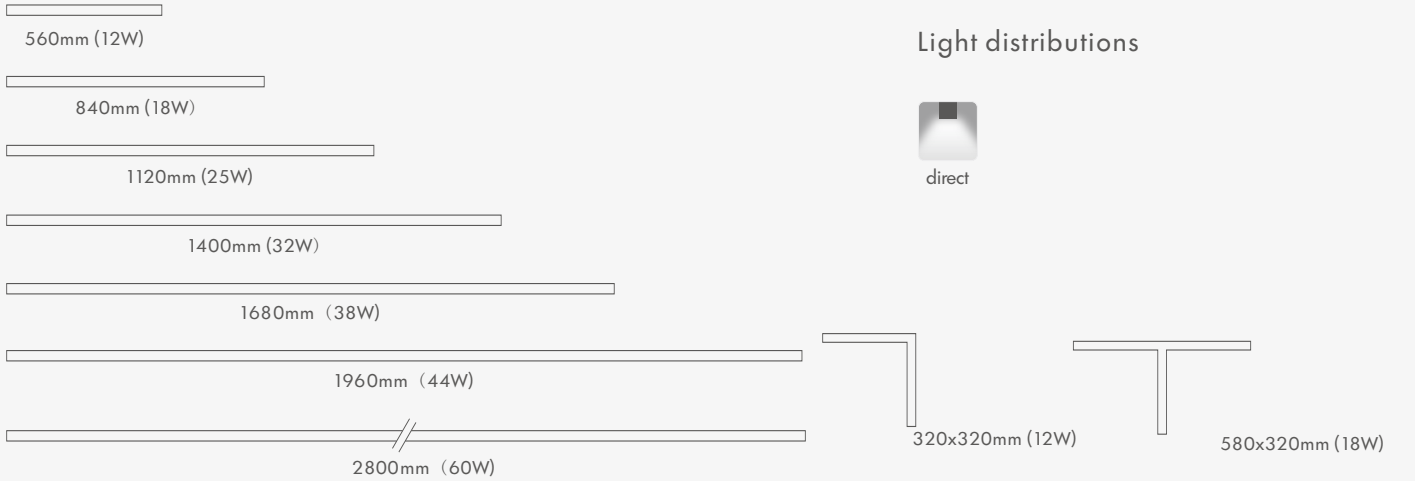

A-L01A0XX

LED
3000K,4000K,5000K, TUNABLE 2700K-5000K
Ra≥80,Ra≥90, MacAdam 3
110lm/W
Driver
Non-dim /DALI dim
Input Voltage: 220-240V/50-60Hz
Lifetime
Up to L80/50.000h
Optic
Diffuser:100°/PC
Flexibility
vertical illumination
Housing
High Pure Aluminium

Colours



Light distributions




LED Architecture Pendant Light




LED
3000K,4000K,5000K, TUNABLE 2700K-5000K
Ra≥80,Ra≥90, MacAdam 3
120lm/W
Driver
Non-dim /DALI dim
Input Voltage: 220-240V/50-60Hz
Lifetime
Up to L80/50.000h
Optic
Diffuser: 100°/PC
Flexibility
vertical illumination
Housing
High Pure Aluminium


Light distributions




Control



Colours



Way to install

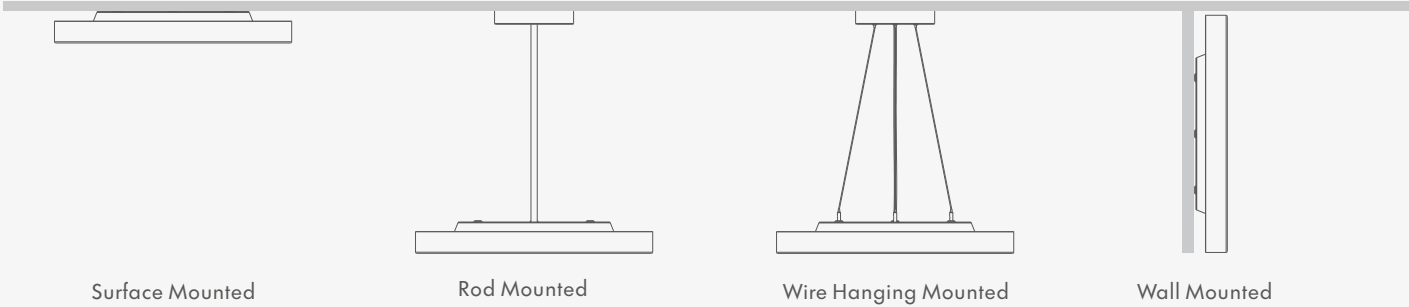

Size

350mm A-S01A030 (30W) 3600lm	450mm A-S01A040 (40W) 4800lm	600mm A-S01A060 (60W) 7200lm	900mm A-S01A090 (90W) 10800lm	1200mm A-S01A120 (120W) 14400lm




LED Architecture Pendant Light




LED
3000K,4000K,5000K, TUNABLE 2700K-5000K
Ra≥80,Ra≥90, MacAdam 3
120lm/W
Driver
Non-dim /DALI dim
Input Voltage: 220-240V/50-60Hz
Lifetime
Up to L80/50.000h
Optic
Diffuser: 90°/PC
Flexibility
Vertical illumination
Housing
High Pure Aluminium


Light distributions




Control



Colours



Way to install

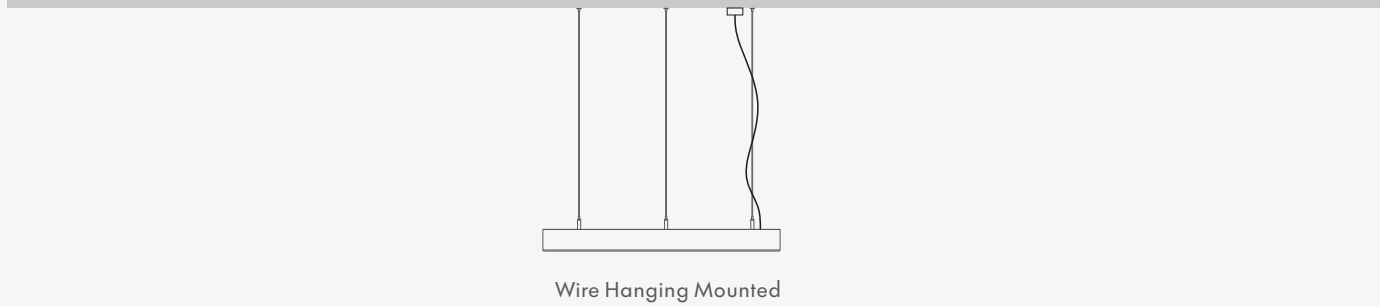


Size

450mm A-L01C020 (20W) 2400lm	783mm A-L01C035 (35W) 4200lm	1200mm A-L01C060 (60W) 7200lm	1860mm A-L01C100 (100W) 12000lm




LED Grille Light

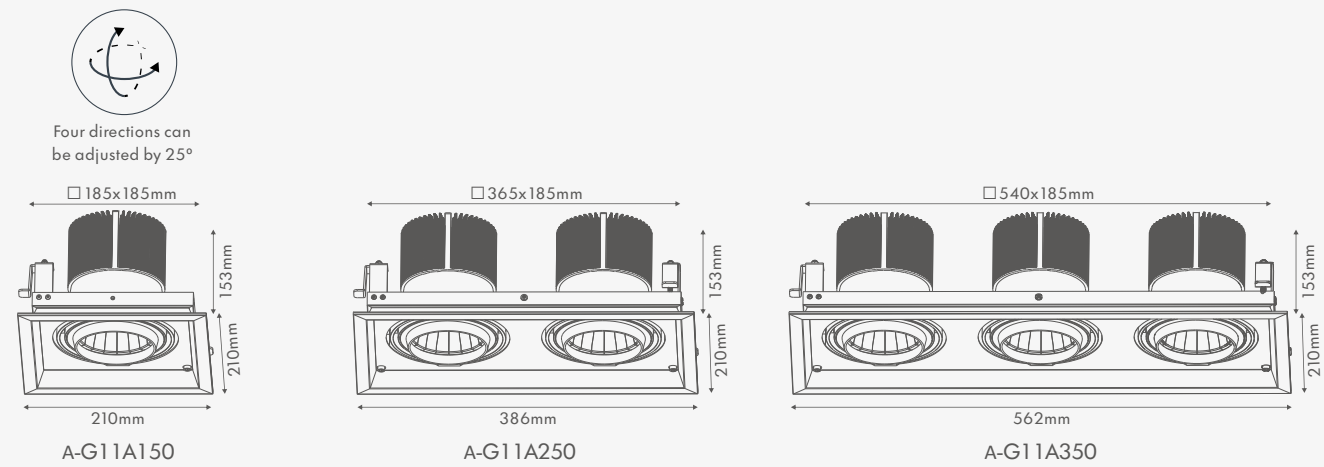


Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-G11A150	50W	220-240V 50/60Hz	830	5800lm 145lm/W	15°/24°/36°/60° (Aluminum)	White Black Gray	Aluminum
			840	6400lm 155lm/W			
			930	5200lm 130lm/W			
			940	5600lm 140lm/W			
A-G11A250	2x50W	220-240V 50/60Hz	830	11600lm 145lm/W	15°/24°/36°/60° (Aluminum)	White Black Gray	Aluminum
			840	12400lm 155lm/W			
			930	10400lm 130lm/W			
			940	11200lm 140lm/W			
A-G11A350	3x50W	220-240V 50/60Hz	830	21750lm 145lm/W	15°/24°/36°/60° (Aluminum)	White Black Gray	Aluminum
			840	23250lm 155lm/W			
			930	19500lm 130lm/W			
			940	21000lm 140lm/W			

LED Grille Light

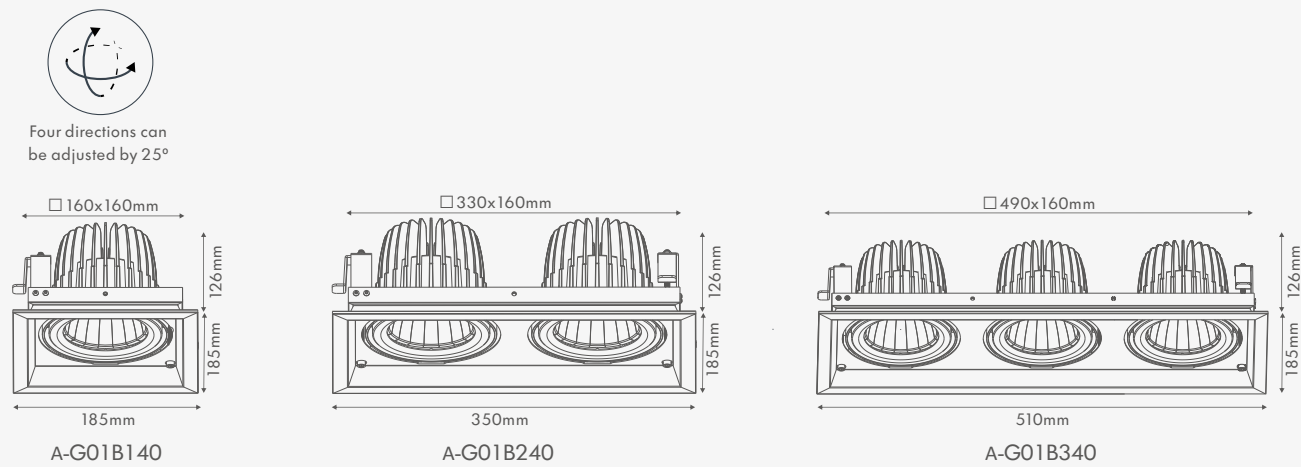

Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-G01B140	40W	220-240V 50/60Hz	830	5800lm 145lm/W	15°/24°/36°/60° (Aluminum)	White Black Gray	Aluminum
			840	6400lm 155lm/W			
			930	5200lm 130lm/W			
			940	5600lm 140lm/W			
A-G01B240	2x40W	220-240V 50/60Hz	830	11600lm 145lm/W	15°/24°/36°/60° (Aluminum)	White Black Gray	Aluminum
			840	12400lm 155lm/W			
			930	10400lm 130lm/W			
			940	11200lm 140lm/W			
A-G01B340	3x40W	220-240V 50/60Hz	830	17400lm 145lm/W	15°/24°/36°/60° (Aluminum)	White Black Gray	Aluminum
			840	18600lm 155lm/W			
			930	15600lm 130lm/W			
			940	16800lm 140lm/W			

LED Multiple Spotlight

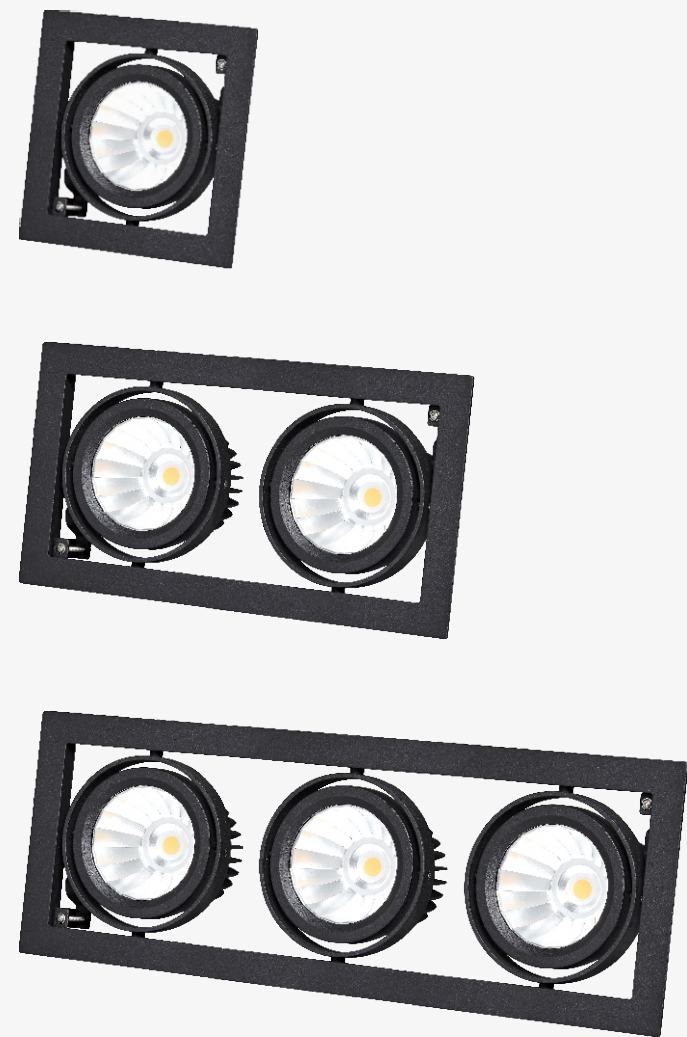

LED
2700K 3000K 3500K 4000K
Ra≥80,Ra≥90,MacAdam3
130lm
Driver
Non-dim /DALI dim
Input Voltage: 220-240V/50-60Hz
Lifetime
Up to L80/50.000h
Optic
Reflector: 15°/24°/36°/60°/PC
Flexibility
Four directions can be adjusted by 25°
Housing
Powder coated die-cast aluminium

Colours

White

Black


On/Off

DALI Dimming


CASAMBI



Four directions can be adjusted by 25°

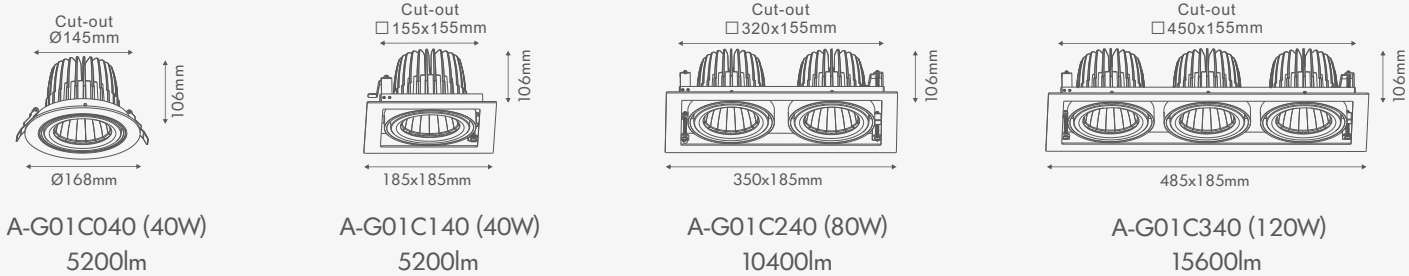

LED Down Light

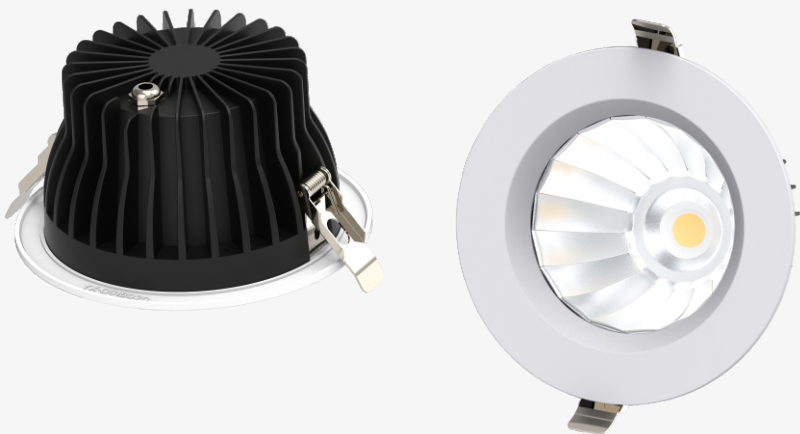

LED
2700K 3000K 3500K 4000K
Ra≥80,Ra≥90,MacAdam3
130lm
Driver
Non-dim /DALI dim
Input Voltage: 220-240V/50-60Hz
Lifetime
Up to L80/50.000h
Optic
Reflector: 15°/24°/36°/60°/PC
Flexibility
Vertical illumination
Housing
Powder coated die-cast aluminium

Colours

White

Black

On/Off

DALI Dimming

CASAMBI

Clear glass

Frosted glass

glare control by cone-shape (UGR<19)

splash water protection (IP 44)

TW 3000-4000K

