


LED Architecture Pendant Light




LED
3000K,4000K,5000K, TUNABLE 2700K-5000K
Ra≥80,Ra≥90, MacAdam 3
120lm/W
Driver
Non-dim /DALI dim
Input Voltage: 220-240V/50-60Hz
Lifetime
Up to L80/50.000h
Optic
Diffuser: 100°/PC
Flexibility
vertical illumination
Housing
High Pure Aluminium


Light distributions




Control




Colours



Way to install

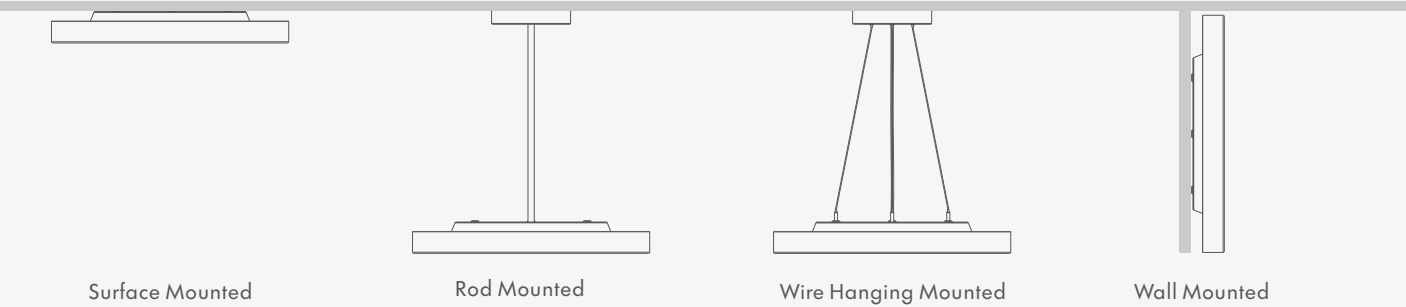

Size

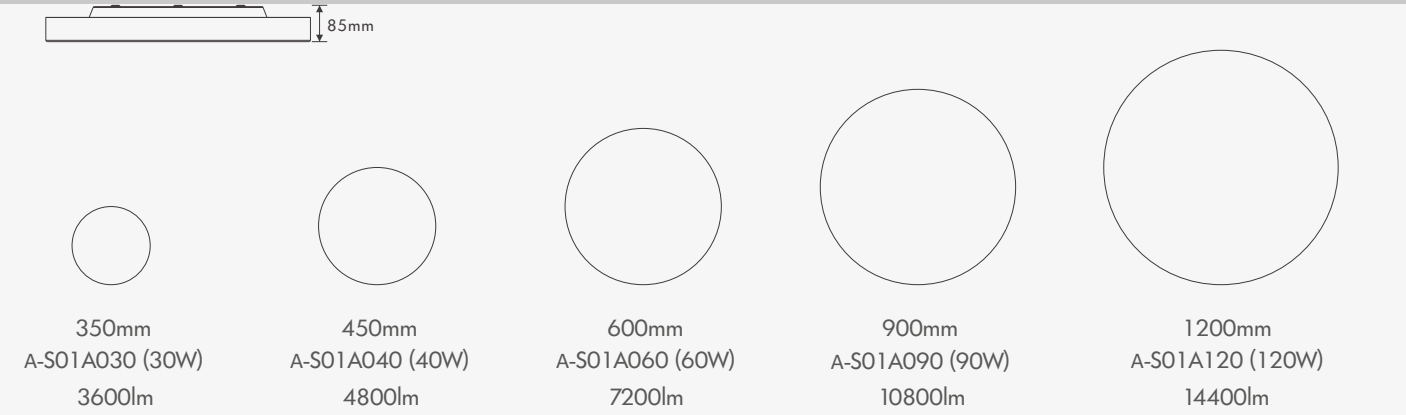


LED Architecture Pendant Light




LED
3000K,4000K,5000K, TUNABLE 2700K-5000K
Ra≥80,Ra≥90, MacAdam 3
120lm/W
Driver
Non-dim /DALI dim
Input Voltage: 220-240V/50-60Hz
Lifetime
Up to L80/50.000h
Optic
Diffuser: 90°/PC
Flexibility
Vertical illumination
Housing
High Pure Aluminium


Light distributions




Control



Colours



Way to install

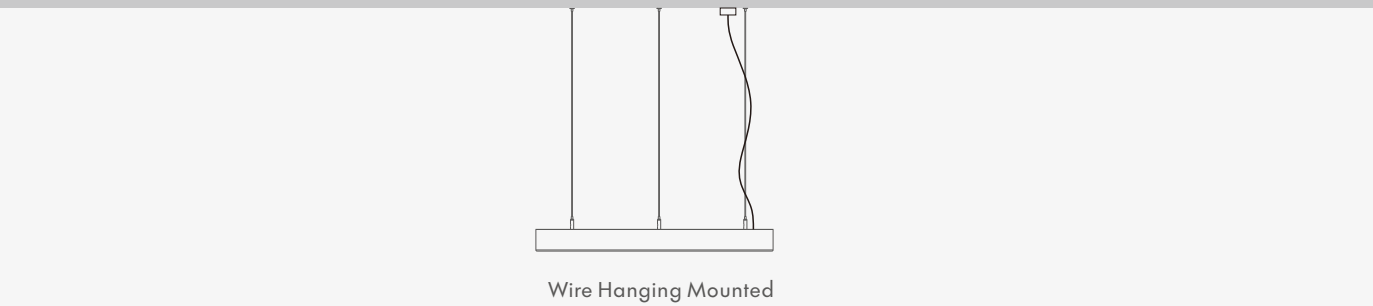

Size

