



Professional Retail Lighting Brochure 2025

Love Life,Love Light


AMAZ Light Tech Co., LTD.

Email: sales@amazlight.com WhatsApp: 86-158 1253 6070


[http: //www.amazlight.com](http://www.amazlight.com)

Add: No.2,Shengfengxingxiang Street, Xiaolan Town, Zhongshan, Guangdong,China. Zip Code: 528415

LED Track Spot Light Diana series



A-T02B028



A-T03B036




On/Off



DALI Dimming



CASAMBI



Vossloh-Schwabe Easyline
GEN.3




Alanod Segment Reflector
Efficiency 98%




Pushing LED Holder

Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-T02B028	30W	220-240V 50/60Hz	830	4080lm 145lm/W	18°/24°/40°/60° (Aluminum)	White Black Gray	High Pure Aluminum
			840	4500lm 160lm/W			
			930	3900lm 138lm/W			
			940	4250lm 150lm/W			
A-T03B036	36W	220-240V 50/60Hz	830	5080lm 140lm/W	17°/24°/36°/60° (Aluminum)	White Black Gray	High Pure Aluminum
			840	5600lm 155lm/W			
			930	4800lm 133lm/W			
			940	5250lm 145lm/W			

Diana sister series LED Track Spot Light



A-T01F030



A-T01F036



On/Off




DALI Dimming




CASAMBI

Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-T01F030	30W	220-240V 50/60Hz	830	3300lm 110lm/W	15°/24°/40°/60° (Aluminum)	White Black Gray	High Pure Aluminum
			840	3450lm 115lm/W			
			930	3000lm 100lm/W			
			940	3300lm 110lm/W			
A-T01F036	36W	220-240V 50/60Hz	830	3960lm 110lm/W	15°/24°/36°/60° (Aluminum)	White Black Gray	High Pure Aluminum
			840	4140lm 115lm/W			
			930	3600lm 100lm/W			
			940	3960lm 110lm/W			


LED Track Spot Light Daisy series



A-T02A028



A-T03A036



Vossloh-Schwabe Easyline GEN.3



Alanod Segment Reflector Efficiency 98%



Pushing LED Holder



On/Off



DALI Dimming




CASAMBI


Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-T02A028	30W	220-240V 50/60Hz	830	4080lm 145lm/W	18°/24°/40°/60° (Aluminum)	White Black Gray	High Pure Aluminum
			840	4500lm 160lm/W			
			930	3900lm 138lm/W			
			940	4250lm 150lm/W			
A-T03A036	36W	220-240V 50/60Hz	830	5080lm 140lm/W	17°/24°/36°/60° (Aluminum)	White Black Gray	High Pure Aluminum
			840	5600lm 155lm/W			
			930	4800lm 133lm/W			
			940	5250lm 145lm/W			

Kiki series


LED Track Spot Light



A-T01C025



A-T01C035



A-T01C042



On/Off





DALI Dimming




CASAMBI

Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-T01C025	25W	220-240V 50/60Hz	830	3400lm 135lm/W	15°/24°/36°/45°/60° (PC)	White Black Gray	Die-Casting Aluminum
			840	3580lm 140lm/W			
			930	2800lm 110lm/W			
			940	2980lm 115lm/W			
A-T01C035	35W	220-240V 50/60Hz	830	4580lm 130lm/W	15°/24°/36°/45°/60° (PC)	White Black Gray	Die-Casting Aluminum
			840	4800lm 135lm/W			
			930	3680lm 105lm/W			
			940	3900lm 110lm/W			
A-T01C042	42W	220-240V 50/60Hz	830	4880lm 115lm/W	15°/24°/36°/45°/60° (PC)	White Black Gray	Die-Casting Aluminum
			840	5100lm 120lm/W			
			930	4200lm 100lm/W			
			940	4410lm 105lm/W			


LED Track Spot Light Zoom in-track series




A-T01G010



A-T01G020





A-T01G030




A-T01G040

Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-T01G010	10W	220-240V 50/60Hz	830	1100lm 110lm/W	10°-55°(Zoomable)	White Black	High Pure Aluminum
			840	1150lm 115lm/W			
			930	900lm 90lm/W			
			940	950lm 95lm/W			
A-T01G020	20W	220-240V 50/60Hz	830	2200lm 110lm/W	10°-55°(Zoomable)	White Black	High Pure Aluminum
			840	2300lm 115lm/W			
			930	1800lm 90lm/W			
			940	1900lm 95lm/W			
A-T01G030	30W	220-240V 50/60Hz	830	3300lm 110lm/W	10°-55°(Zoomable)	White Black	High Pure Aluminum
			840	3450lm 115lm/W			
			930	2700lm 90lm/W			
			940	2850lm 95lm/W			
A-T01G036	36W	220-240V 50/60Hz	830	3600lm 110lm/W	10°-55°(Zoomable)	White Black	High Pure Aluminum
			840	4140lm 115lm/W			
			930	3240lm 90lm/W			
			940	3420lm 95lm/W			


Zoom series LED Track Spot Light




A-T02G010



A-T02G020




A-T02G030




A-T02G040

Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-T02G010	10W	220-240V 50/60Hz	830	1100lm 110lm/W	10°-55°(Zoomable)	White Black	High Pure Aluminum
			840	1150lm 115lm/W			
			930	900lm 90lm/W			
			940	950lm 95lm/W			
A-T02G020	20W	220-240V 50/60Hz	830	2200lm 110lm/W	10°-55°(Zoomable)	White Black	High Pure Aluminum
			840	2300lm 115lm/W			
			930	1800lm 90lm/W			
			940	1900lm 95lm/W			
A-T02G030	30W	220-240V 50/60Hz	830	3300lm 110lm/W	10°-55°(Zoomable)	White Black	High Pure Aluminum
			840	3450lm 115lm/W			
			930	2700lm 90lm/W			
			940	2850lm 95lm/W			
A-T02G036	36W	220-240V 50/60Hz	830	3600lm 110lm/W	10°-55°(Zoomable)	White Black	High Pure Aluminum
			840	4140lm 115lm/W			
			930	3240lm 90lm/W			
			940	3420lm 95lm/W			



LED Track Spot Light Slim sister series





A-T21B010




A-T21B020

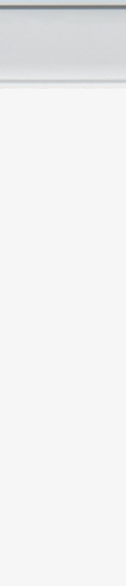

A-T21B030




A-T21B040




A-T21D010/20/30/40

Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-T21B010	10W	220-240V 50/60Hz	830	1150lm 115lm/W	15°/24°/36° (Aluminum)	White Black	High Pure Aluminum
			840	1200lm 120lm/W			
			930	1000lm 100lm/W			
			940	1150lm 115lm/W			
A-T21B020	20W	220-240V 50/60Hz	830	2300lm 115lm/W	15°/28°/40° (Aluminum)	White Black	High Pure Aluminum
			840	2400lm 120lm/W			
			930	2000lm 100lm/W			
			940	2300lm 115lm/W			
A-T21B030	30W	220-240V 50/60Hz	830	4200lm 140lm/W	15°/28°/40°/60° (Aluminum)	White Black	High Pure Aluminum
			840	4650lm 155lm/W			
			930	3990lm 133lm/W			
			940	4350lm 145lm/W			
A-T21B040	40W	220-240V 50/60Hz	830	5460lm 140lm/W	15°/24°/36°/60° (Aluminum)	White Black	High Pure Aluminum
			840	6200lm 155lm/W			
			930	5320lm 133lm/W			
			940	5800lm 145lm/W			



Apple Series LED Track Spot Light

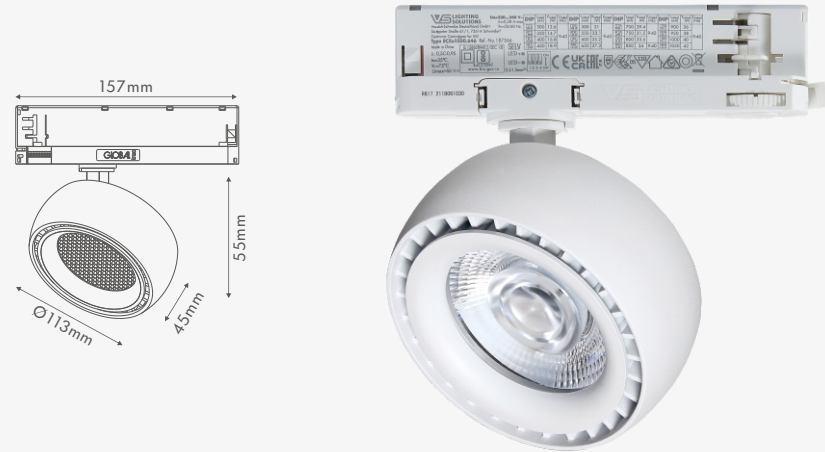

A-T08A028
LED
2700K 3000K 3500K 4000K
Ra≥80,Ra≥90, MacAdam 3
130lm/W
Driver
Non-dim /DALI dim
Input Voltage: 220-240V/50-60Hz
Output:DC36V 700mA
System Power(W)
28W/3680lm
Lifetime
Up to L80/50.000h
Optic
Reflector: 15°, 24°, 36°, 60°(PMMA)
Flexibility
rotatable up to 355°, adjustable up to 90°
Housing
Die-Casting Aluminum
Colour
White,Black,Gray




LED Linear Track Light Lia Series

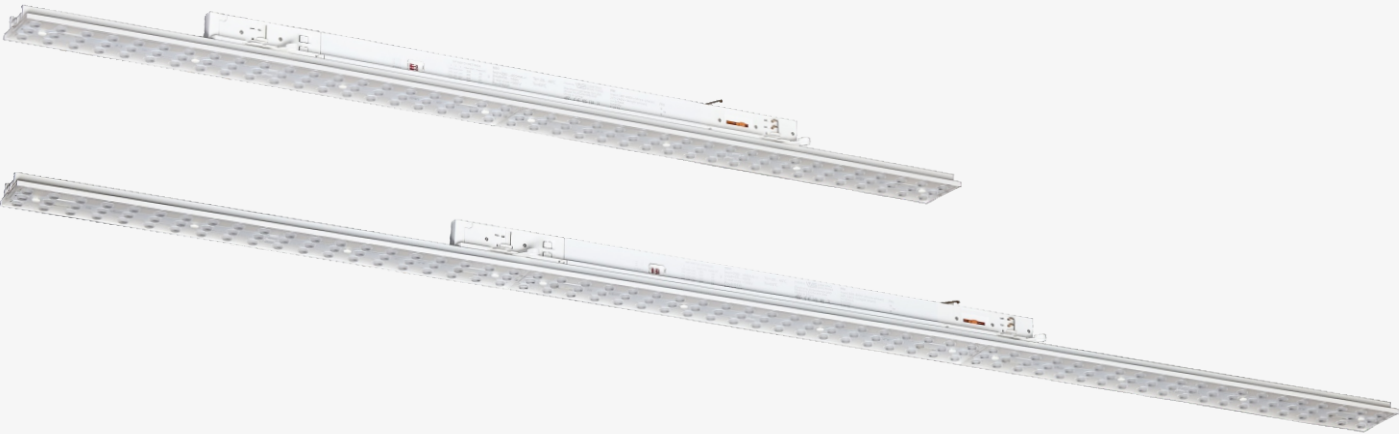

A-TL5B040 (40W)




A-TL5B060 (60W)

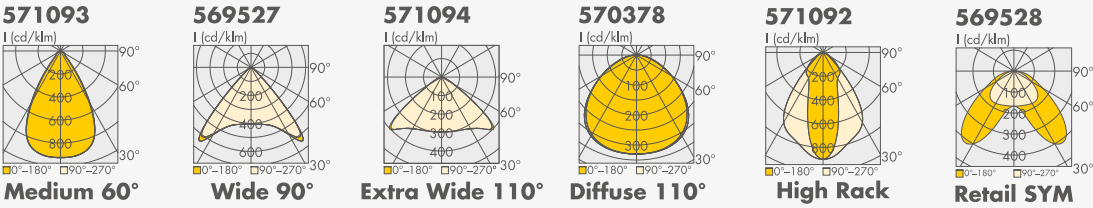


Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-TL5B040	40W	220-240V 50/60Hz	830	6200lm 155lm/W	Medium 60° (PMMA)	White Black	Aluminum
			840	6600lm 165lm/W	Wide 90° (PMMA)		
			930	5400lm 135lm/W	Extra Wide 110° (PMMA)		
			940	5800lm 145lm/W	Diffuse 110° (PMMA) High Rack (PMMA) Retail SYM (PMMA)		
A-TL5B060	60W	220-240V 50/60Hz	830	9300lm 155lm/W	Medium 60° (PMMA)	White Black	Aluminum
			840	9600lm 160lm/W	Wide 90° (PMMA)		
			930	8100lm 135lm/W	Extra Wide 110° (PMMA)		
			940	8700lm 145lm/W	Diffuse 110° (PMMA) High Rack (PMMA) Retail SYM (PMMA)		


Lia Sister Series LED Linear Track Light



A-TL5C040 (40W)







A-TL5C060 (60W)



Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-TL5C040	40W	220-240V 50/60Hz	830	4400lm 110lm/W	120° (PC)	White Black	Aluminum
			840	4800lm 120m/W			
			930	4000lm 100lm/W			
			940	4400lm 110m/W			
A-TL5C060	60W	220-240V 50/60Hz	830	6600lm 110lm/W	120° (PC)	White Black	Aluminum
			840	7200lm 120m/W			
			930	6000lm 100lm/W			
			940	6600lm 110m/W			



LED Linear Track Light EVA Series

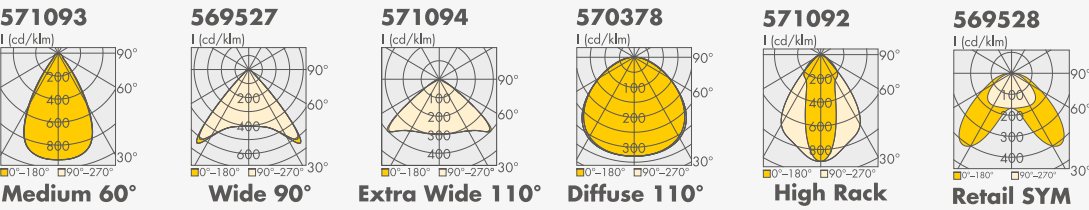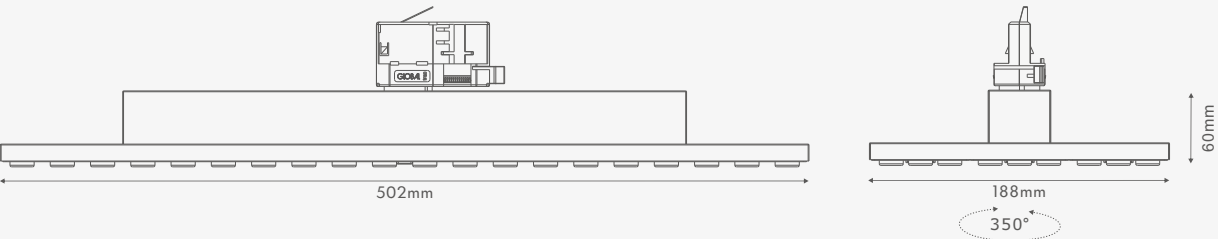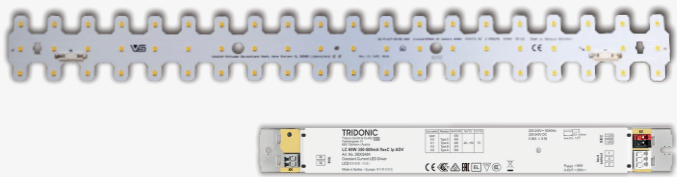

Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-TL8A060	60W	220-240V 50/60Hz	830	9300lm 155lm/W	Medium 60° (PMMA)	White Black	Iron
			840	9900lm 165lm/W	Wide 90° (PMMA)		
			930	8100lm 135lm/W	Extra Wide 110° (PMMA)		
			940	8700lm 145lm/W	Diffuse 110° (PMMA)		
A-TL8A072	72W	220-240V 50/60Hz	830	11160lm 155lm/W	High Rack (PMMA)	White Black	Iron
			840	11520lm 160lm/W	Retail SYM (PMMA)		
			930	9720lm 135lm/W	Medium 60° (PMMA)		
			940	10440lm 145lm/W	Wide 90° (PMMA)		




EVA sister Series LED Linear Track Light

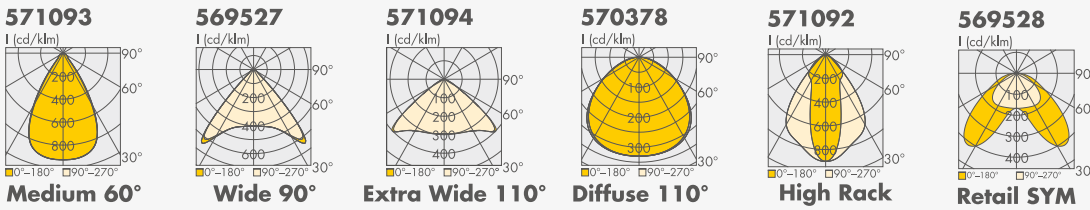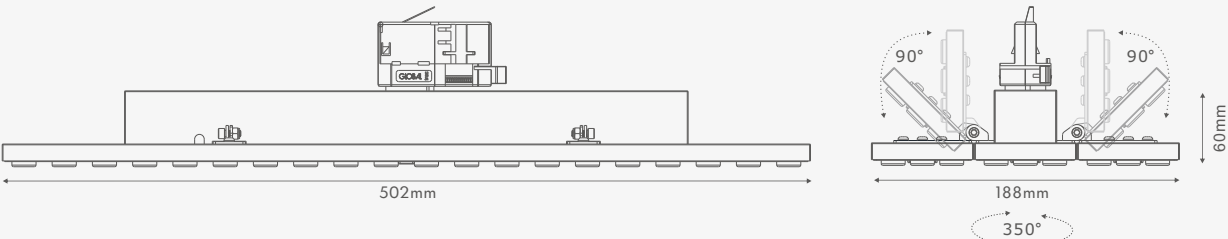

Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-TL8B060	60W	220-240V 50/60Hz	830	9300lm 155lm/W	Medium 60° (PMMA)	White Black	Iron
			840	9900lm 165lm/W	Wide 90° (PMMA)		
			930	8100lm 135lm/W	Extra Wide 110° (PMMA)		
			940	8700lm 145lm/W	Diffuse 110° (PMMA)		
A-TL8B072	72W	220-240V 50/60Hz	830	11160lm 155lm/W	High Rack (PMMA)	White Black	Iron
			840	11520lm 160lm/W	Retail SYM (PMMA)		
			930	9720lm 135lm/W	Medium 60° (PMMA)		
			940	10440lm 145lm/W	Wide 90° (PMMA)		





LED Linear Track Light **Velo Series**

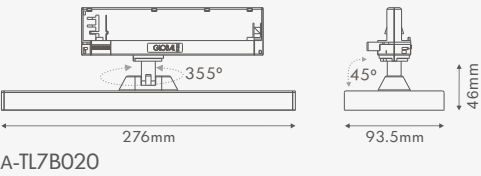




Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-TL7B020	20W	220-240V 50/60Hz	830	2900lm 145lm/W	60°(pc) 85°(pc)	White Black	Aluminum
			840	2700lm 135lm/W			
			930	2600lm 130lm/W			
			940	2400lm 120lm/W			
A-TL7B060	60W	220-240V 50/60Hz	830	8700lm 145lm/W	60°(pc) 85°(pc)	White Black	Aluminum
			840	8100lm 135lm/W			
			930	7800lm 130lm/W			
			940	7200lm 120lm/W			

Velo sister Series LED Linear Track Light

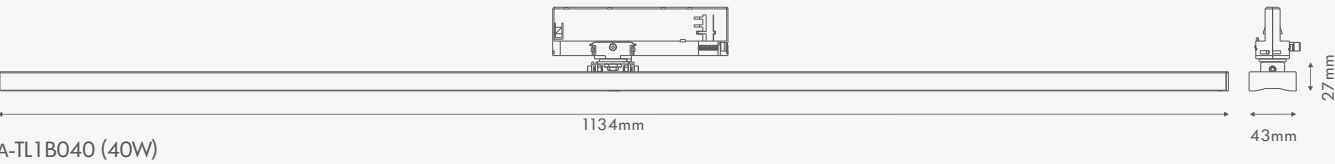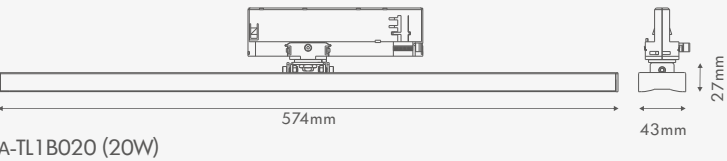

Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-TL1B020	20W	220-240V 50/60Hz	830	2200lm 110lm/W	36x70° (PMMA) P20°(PMMA)	White Black	Aluminum
			840	2400lm 120m/W			
			930	2000lm 100lm/W			
			940	2200lm 110m/W			
A-TL1B040	40W	220-240V 50/60Hz	830	4400lm 110lm/W	36x70° (PMMA) P20°(PMMA)	White Black	Aluminum
			840	4800lm 120m/W			
			930	4000lm 100lm/W			
			940	4400lm 110m/W			

LED Trunking System Ella Series

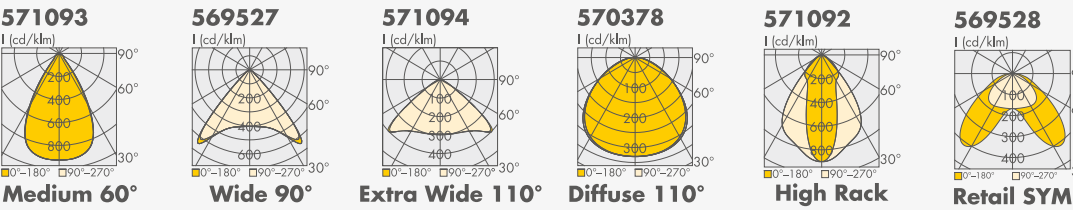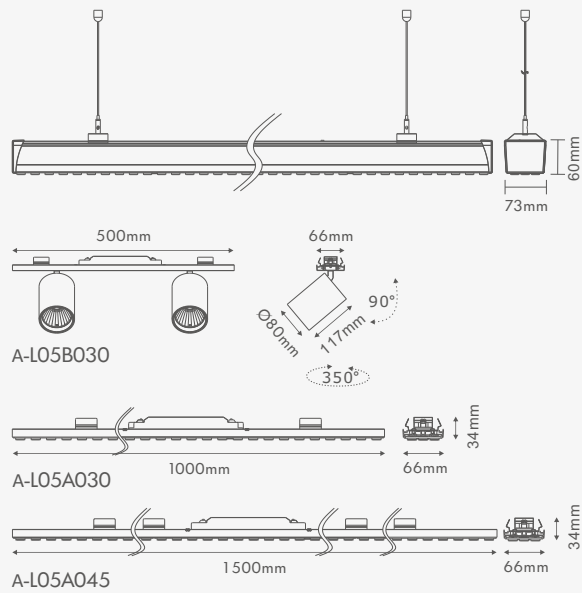
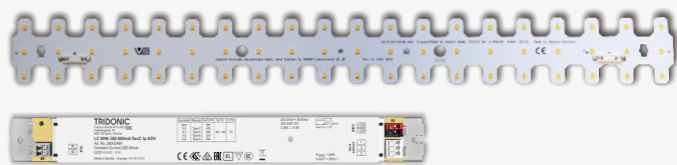


Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-L05B030	30W	220-240V 50/60Hz	830	4060lm 135lm/W	15°/24°/36°/45°/60° (PC)	White Black	Aluminum
			840	4280lm 142lm/W			
			930	3400lm 113lm/W			
			940	3600lm 119lm/W			
A-L05A030	30W	220-240V 50/60Hz	830	5200lm 170lm/W	Medium 60° (PMMA) Wide 90° (PMMA) Extra Wide 110° (PMMA) Diffuse 110° (PMMA) High Rack (PMMA) Retail SYM (PMMA)	White Black	Aluminum
			840	5300lm 175lm/W			
			930	4280lm 142lm/W			
			940	4550lm 150lm/W			
A-L05A045	45W	220-240V 50/60Hz	830	7680lm 170lm/W	Medium 60° (PMMA) Wide 90° (PMMA) Extra Wide 110° (PMMA) Diffuse 110° (PMMA) High Rack (PMMA) Retail SYM (PMMA)	White Black	Aluminum
			840	7900lm 175lm/W			
			930	6400lm 142lm/W			
			940	6800lm 150lm/W			

Connie Series LED Linear Light



Types

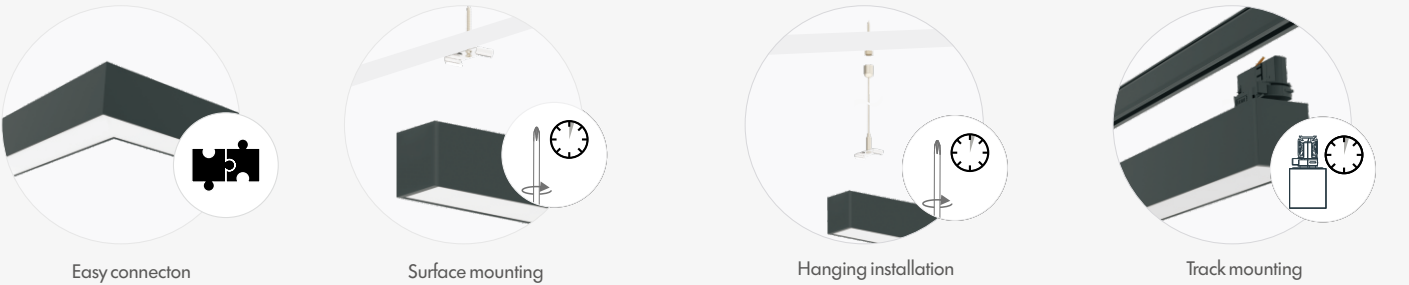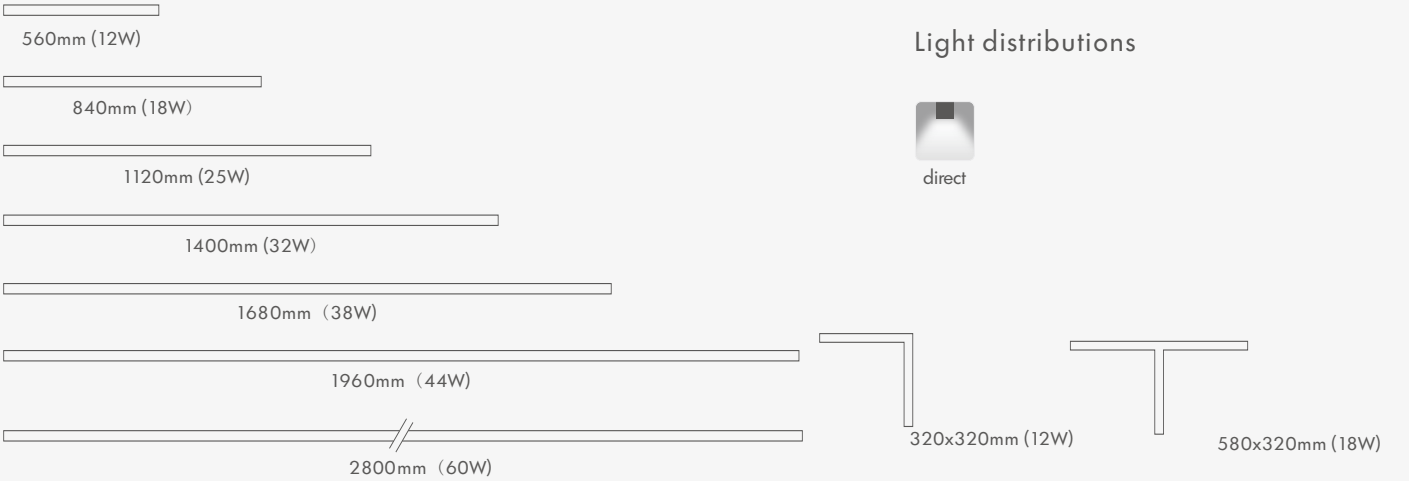

A-L01A0XX
LED
3000K,4000K,5000K, TUNABLE 2700K-5000K
Ra≥80,Ra≥90, MacAdam 3
110lm/W
Driver
Non-dim /DALI dim
Input Voltage: 220-240V/50-60Hz
Lifetime
Up to L80/50.000h
Optic
Diffuser:100°/PC
Flexibility
vertical illumination
Housing
High Pure Aluminium

Colours

White Black

Light distributions

direct


LED Architecture Pendant Light

Moon series




LED
3000K,4000K,5000K, TUNABLE 2700K-5000K
Ra≥80,Ra≥90, MacAdam 3
120lm/W
Driver
Non-dim /DALI dim
Input Voltage: 220-240V/50-60Hz
Lifetime
Up to L80/50.000h
Optic
Diffuser: 100°/PC
Flexibility
vertical illumination
Housing
High Pure Aluminium


Light distributions




Control



Colours



Way to install

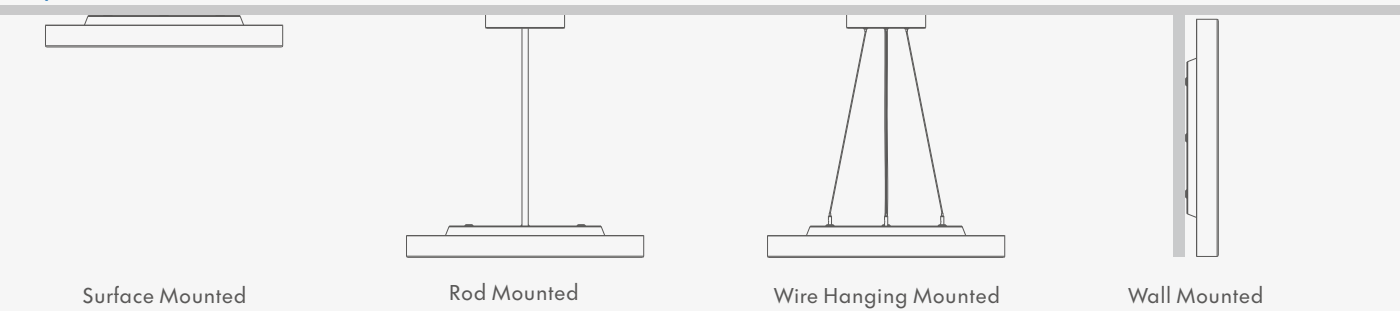

Size




Lila Series




LED Architecture Pendant Light

LED
3000K,4000K,5000K, TUNABLE 2700K-5000K
Ra≥80,Ra≥90, MacAdam 3
120lm/W
Driver
Non-dim /DALI dim
Input Voltage: 220-240V/50-60Hz
Lifetime
Up to L80/50.000h
Optic
Diffuser: 90°/PC
Flexibility
Vertical illumination
Housing
High Pure Aluminium


Light distributions




Control



Colours






Way to install

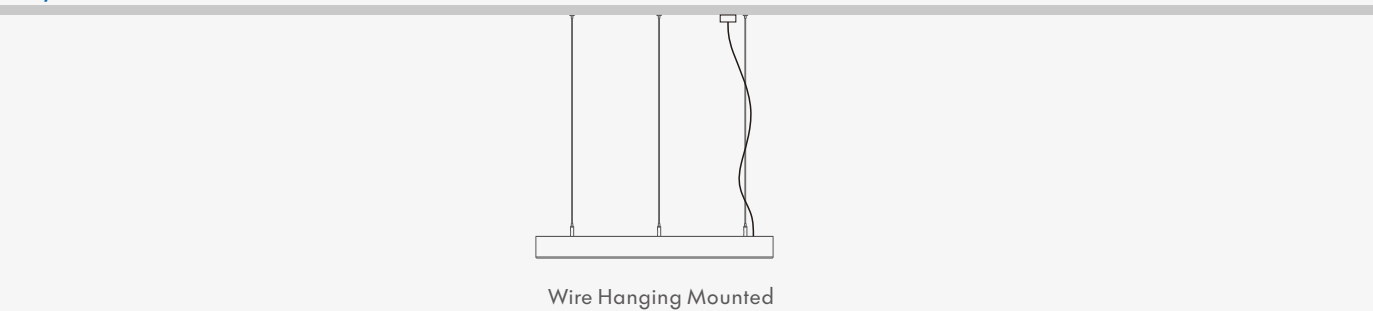

Size





LED Multiple spotlight Jager Series

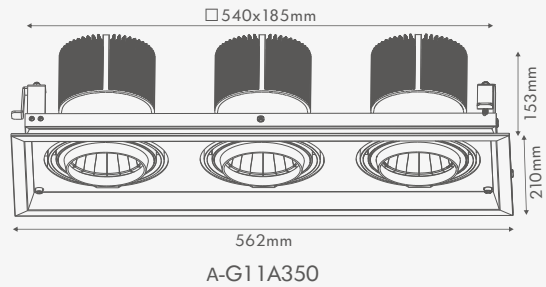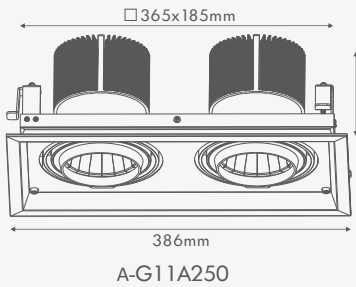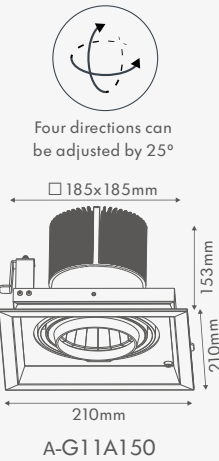


Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-G11A150	50W	220-240V 50/60Hz	830	5800lm 145lm/W	15°/24°/36°/60° (Aluminum)	White Black Gray	Aluminum
			840	6400lm 155lm/W			
			930	5200lm 130lm/W			
			940	5600lm 140lm/W			
A-G11A250	2x50W	220-240V 50/60Hz	830	11600lm 145lm/W	15°/24°/36°/60° (Aluminum)	White Black Gray	Aluminum
			840	12400lm 155lm/W			
			930	10400lm 130lm/W			
			940	11200lm 140lm/W			
A-G11A350	3x50W	220-240V 50/60Hz	830	21750lm 145lm/W	15°/24°/36°/60° (Aluminum)	White Black Gray	Aluminum
			840	23250lm 155lm/W			
			930	19500lm 130lm/W			
			940	21000lm 140lm/W			

Juno Series LED Multiple Spotlight

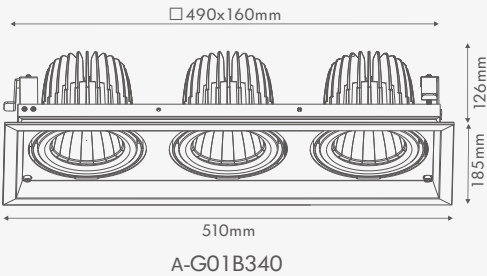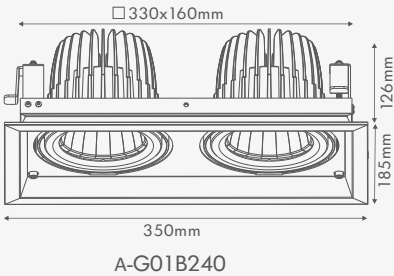

Ref No	Power.W	Input voltage	CRI Lichtfarbe	Luminous flux lm lm/W	Beam Angle	Colours	Material
A-G01B140	40W	220-240V 50/60Hz	830	5800lm 145lm/W	15°/24°/36°/60° (Aluminum)	White Black Gray	Aluminum
			840	6400lm 155lm/W			
			930	5200lm 130lm/W			
			940	5600lm 140lm/W			
A-G01B240	2x40W	220-240V 50/60Hz	830	11600lm 145lm/W	15°/24°/36°/60° (Aluminum)	White Black Gray	Aluminum
			840	12400lm 155lm/W			
			930	10400lm 130lm/W			
			940	11200lm 140lm/W			
A-G01B340	3x40W	220-240V 50/60Hz	830	17400lm 145lm/W	15°/24°/36°/60° (Aluminum)	White Black Gray	Aluminum
			840	18600lm 155lm/W			
			930	15600lm 130lm/W			
			940	16800lm 140lm/W			

LED Multiple Spotlight Jett Series

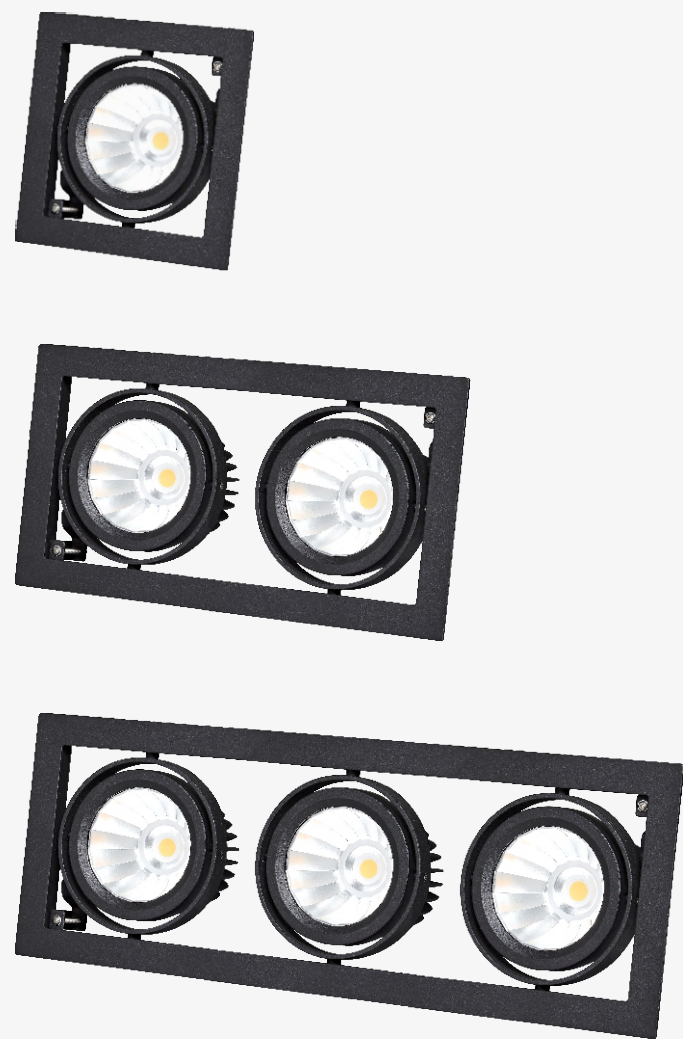

LED
2700K 3000K 3500K 4000K
Ra≥80,Ra≥90,MacAdam3
130lm
Driver
Non-dim /DALI dim
Input Voltage: 220-240V/50-60Hz
Lifetime
Up to L80/50.000h
Optic
Reflector: 15°/24°/36°/60°/PC
Flexibility
Four directions can be adjusted by 25°
Housing
Powder coated die-cast aluminium

Colours

White

Black

On/Off

DALI Dimming

CASAMBI



Four directions can be adjusted by 25°

