

Outdoor Wall surface light(Downward, up & downward)

Spy series without any gap on the fixture surface, very slim



Description:

Compact surface-mount wall luminaire family without any gap on the fixture for architectural façades, pathways and residential exteriors. Available as single-direction (down) or bi-directional (up & down) in both round Ø40–90 mm housings. Output ranges from 5 W to 15 W (single) or 2 × 5 W – 2 × 15 W (dual) with CRI 80 / 90 LEDs, selectable 2700 K | 3000 K | 4000 K. Interchangeable precision optics—15°, 24°, 36° or 50°—and optional honeycomb louvre deliver tight accent or wide flood distributions while limiting glare. Extruded aluminium construction without any gap on the structure, corrosion-resistant finish and sealed optical chamber ensure long-term outdoor reliability; quick surface-plate mount reduces installation time. Dimming via ON-OFF or phase-cut (Triac) drivers.

Specifications:

Indoor/Outdoor	Outdoor
Product No.:	A-OSW2040-1(Downward) / A-OSW2040-2(up & down)
Input Voltage:	24VDC, 220-240Vac
System Power:	1*5W / 2*5W
Type of light source:	CREE LEDs
Color Rendering(CRI):	Ra 80 or Ra 90
CCT:	2700K / 3000K / 4000K
System Lumen:	350lm / 2*350lm
System Efficacy:	70 lm/W
Light Distribution:	Downward / up & down
Beam Angle:	15°/24°/36°
UGR (4H 8H):	/
IP Rating:	IP65
Color:	Black
Luminaire Lifetime:	50.000h (L80B50, Ta25°C)
Working Temperature:	-20 ~ +40 °C
Material:	Extruded 6063 Aluminum body
Electrical Class	I
Photobiological Safety:	
Dimming:	ON-OFF, TRIAC

Mounting / Connection:

Mounting:	Wall surface-mounted
Cut-out:	N/A
Power cable:	

Packaging Information:

N.W. Fixture (Kg)
G.W. Carton
Mater Carton Dimension:
Qty per Carton:

Photometrics

Please download from the website or consult the sales manager.

Ordering Information:


Model No.	Trim Shape	Product Type	Diameter	Wattage	Color Rendering	CCT	Beam	Accessory	Dimming Options
AOSW2040-1	R Round	A Downward	Ø 40*300mm	5W	2*5W	8 80+ CRI	27 2700K		
AOSW2040-2		B Up & Down	Ø 40*400mm	7W	2*7W	9 90+ CRI	30 3000K		
A-OSW2065-1				15W	2*15W		40 4000K		
A-OSW2065-2								Honeycomb louvre	
A-OSW2065-1(GU10 compatible version)							NS (15°)		F ON-OFF
A-OSW2065-2(GU10 compatible version)							MB (24°)		P PHASE DIM
A-OSW2090-1							MF (36°)		
A-OSW2090-2									

For A-OSW2065-1 or A-OSW2065-2, built-in DALI DIM version is available

Picture:




Line Drawings:

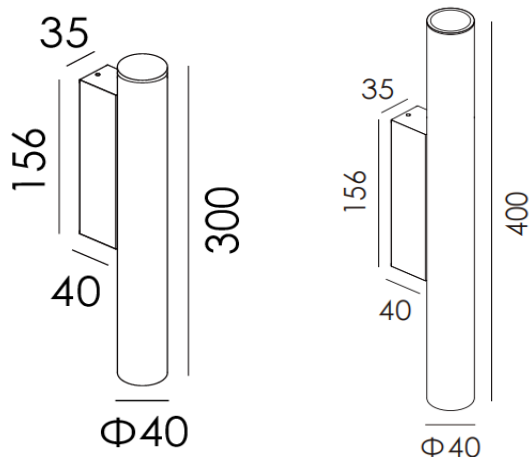


A-OSW2040-1

A-OSW2040-2


Product Variants




A-OSW2040-1
1*5W




A-OSW2040-2
2*5W




A-OSW2065-1
1*7W




A-OSW2065-2
2*7W



A-OSW2090-1
1*15W




A-OSW2090-2
2*15W



A-OSW2065-1
GU10 bulb

to be ordered separately



A-OSW2065-2
GU10 bulb*2

to be ordered separately

Product Variants- Accessories

