

25

Outdoor Lighting Catalogue

AMAZ Light Tech Co., LTD.

WhatsApp: 86-158 1253 6070

Email: sales@amazlight.com

<http://www.amazlight.com>

Add: No.2, Shengfengxingxiang Street,
Xiaolan Town, Zhongshan, Guangdong, China.

Zip Code: 528415

Love Life, Love Light

COMPANY PROFILE

Welcome to AMAZ LIGHT, where lighting meets innovation.

Founded by a visionary team with 15 years of experience in commercial lighting, we're experts in tailored solutions for international clients. The brand name AMAZ is derived from the word "amazing." We aim to provide our partners with a professional and extraordinary lighting experience.

As a China-based ODM/OEM LED fixtures supplier, AMAZ LIGHT specializes in high-end fixtures with rich export experience to Germany, Italy, Spain, France, the United Kingdom, Australia, Southeast Asia, and the Middle East. Our focus is on architectural lighting for commercial, hotel, residential, and office applications, promoting a sustainable, human-centric, connected lighting world.

Seamlessly integrating Western ideas with Chinese speed, AMAZ LIGHT excels in innovation and quality solutions for topclass brands and major projects. Our 'universal design' philosophy allows interchangeability across product families, delivering customized solutions with short lead times. Our core values—customer-centricity, quality excellence, professional collaboration, and pursuit of excellence—guide our approach. Embracing a spirit of collaboration and innovation, we prioritize continuous improvement, attention to detail, execution focus, and a people-centric approach. commercial, hotel, residential, and office applications, promoting a sustainable, human-centric, connected lighting world.


At AMAZ LIGHT, our mission is to elevate life quality through inclusive product design. Our operational philosophy, "Embrace All, Benefit All," underscores our commitment to being a top-tier, design-leading lighting enterprise. Committed to constant innovation, AMAZ LIGHT aims to design and manufacture the best quality LED lights for global partners and customers. Whether meeting standard requirements or crafting bespoke solutions, AMAZ LIGHT stands ready with unique offerings to illuminate and elevate spaces worldwide.

Factory

Our factory has strong capabilities and resources to support our custom services in the outdoor lighting industry. Here are the key highlights of our factory's strengths.

Own facilities and manufacturing technology:

Our factory is equipped with advanced equipment and manufacturing technology, including high-precision machining equipment, automated production lines, and precise testing. These facilities and technologies ensure the quality and performance of our products.

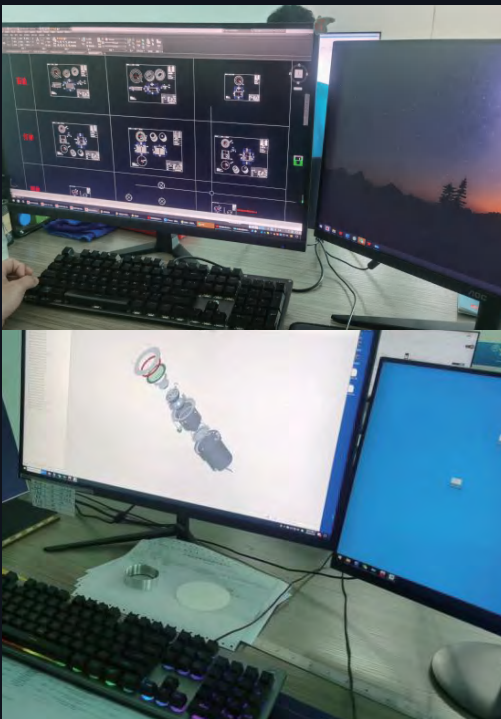

Research and Development Capabilities:

We prioritize innovation and R&D, continuously introducing new products and solutions that meet market demands. Our R&D team collaborates closely with industry experts and partners to maintain a leading position in technology and design.



Quality Control:

We strictly adhere to a quality management system, implementing rigorous quality control at every stage, from raw material procurement to production. We are committed to delivering products that meet international standards and customer requirements.

Professional Team:

We have a professional team comprising experienced engineers, designers, and technical personnel. They possess industry knowledge and expertise, enabling them to provide high-level design, manufacturing, and technical support.

14
YEARS

Structural engineer with 14 years of experience in outdoor lighting field

10
YEARS

Electronic engineer with 10 years of work experience

15
YEARS

Quality control engineer with 15 years of experience in outdoor lighting



Raw Material Supply Chain:

We have established long-term stable partnerships with excellent suppliers, ensuring access to high-quality raw materials and components. This allows us to guarantee product quality and supply stability.



Customer satisfaction is our core objective. We prioritize omunication and cooperation with customers, providing personalized solutions based on their needs and ensuring timely after-sales service.

Customer Satisfaction



These capabilities and resources enable us to deliver high-quality, innovative, and reliable outdoor lighting solutions that meet diverse customer demands. We will continue to enhance our factory's capabilities to provide customers with even better products and services.




Our factory is equipped with advanced equipment and manufacturing technology, including high-precision machining equipment, automated production lines, and precise testing devices. These facilities and technologies ensure the quality and performance of our products.



Quality Assurance

We strictly adhere to a quality management system, implementing rigorous quality control at every stage, from raw material procurement to production. We are committed to delivering products that meet international standards and customer requirements.

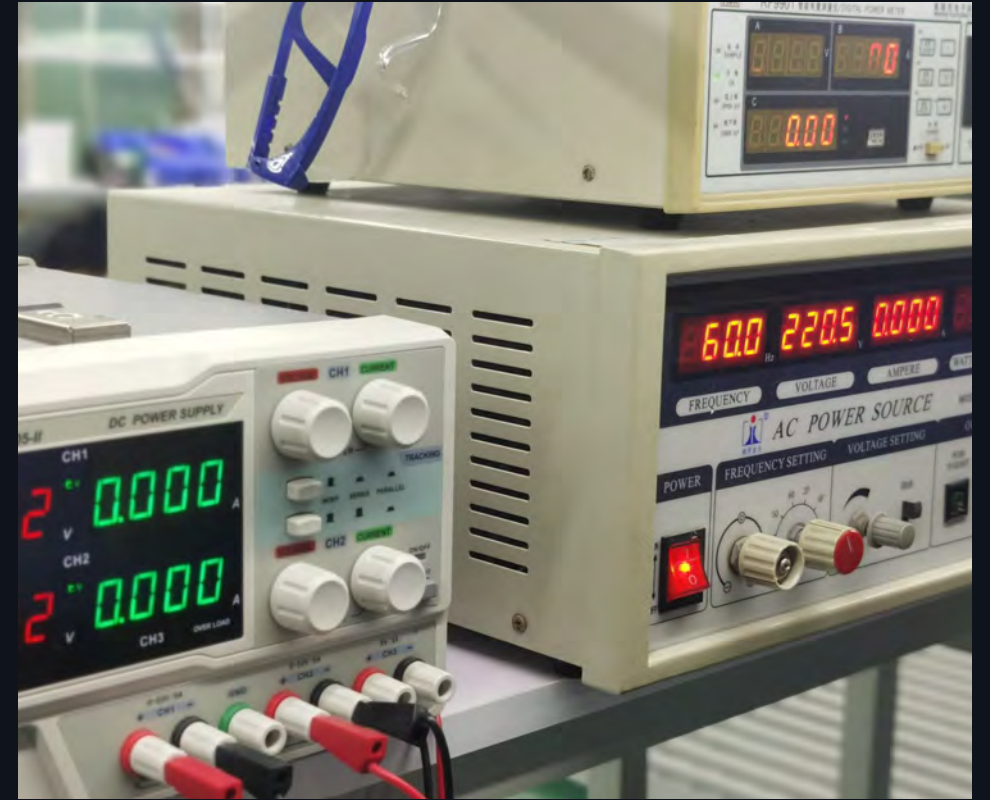

Electronic Componets, Mechanical Material, Materials & Lightings Test Instrument



Contents

Page 21~106



Outdoor In-ground Light

IP67

Page 107~180



Outdoor Spot Light

IP66

Page 181~208



LED Wall Light

IP65

Page 209~246



Outdoor Underwater Light

IP68

Page 247~284




LED Wall Washer Light

IP65

Series 2 In-ground Light
Page 21~50


NEW

Circular

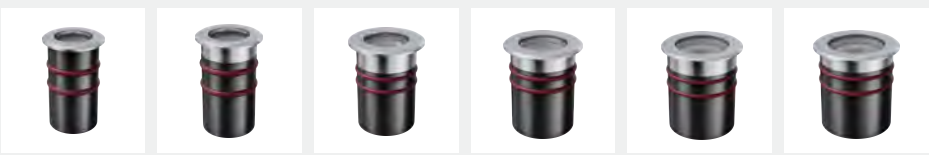


P33

Square

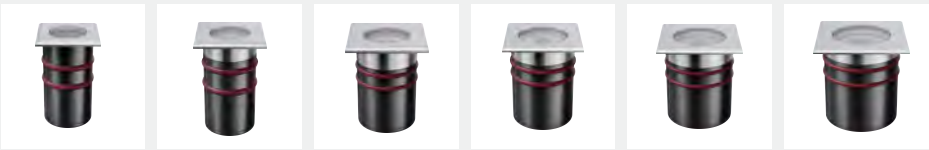


P35

Half Covered

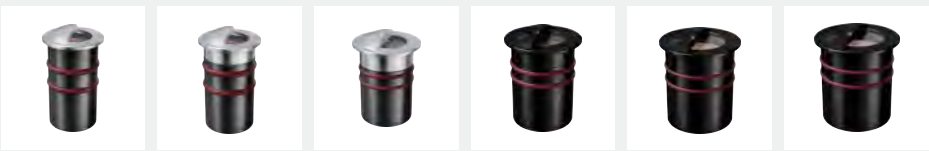


P37

Trimless

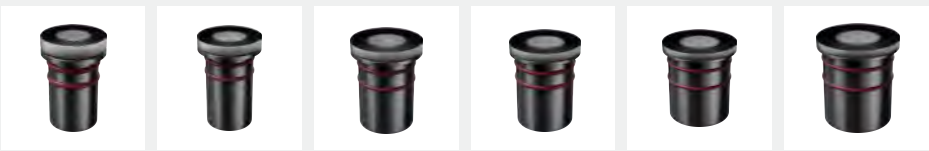


P39

Step

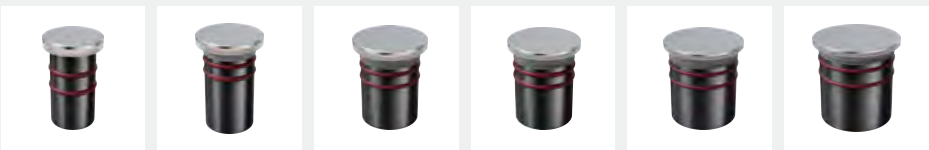

P45

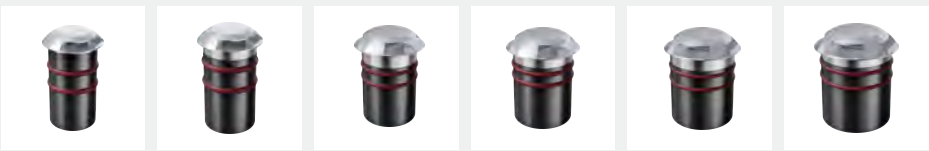

P49

LED Adjustable Inground Light
Page 51~68



P63



P65



P67

LED Depth Illuminant Inground Light
Page 71~74



P71



P73



P77



P79

Asymmetric

LED COB Inground Light
Page 75~82


Reflector




P83



P85

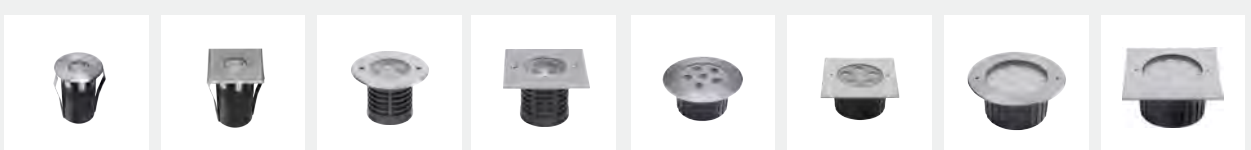

P87

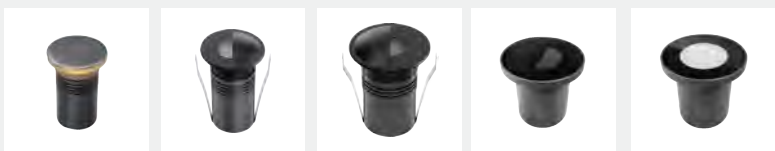

P89

LED Inground Light
Page 83~90


COB

Slim Type
LED
Inground Light
Page 91~92



P91

LED Inground Side Light
Page 93~94

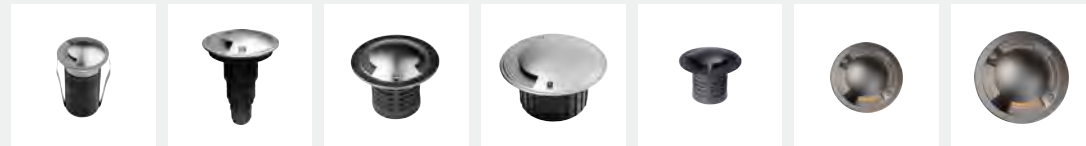

P93

LED Linear Inground Light
Page 95~106



P103




P105

Zoomable LED
Landscape
Spot Light
Page 107~122



P117

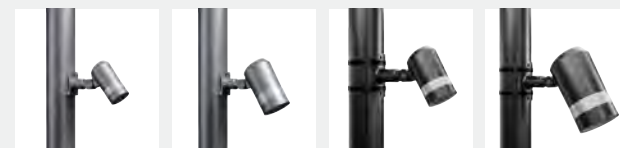


P119



P121

LED Landscape
Spot Light
--Series LP
Page 123~130

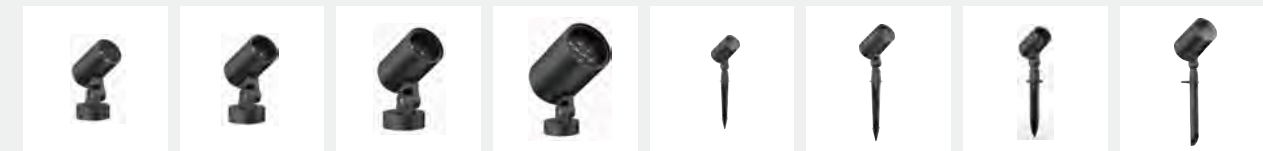

P125




P127




P129

Round LED Landscape Spot Light --Series 3K
Page 131~152

NEW

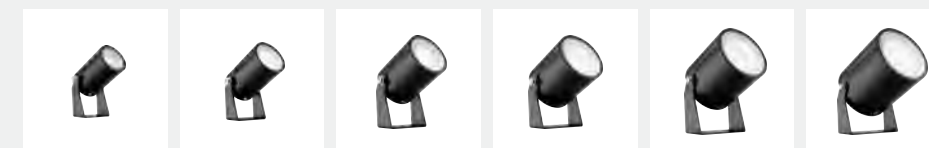

P139

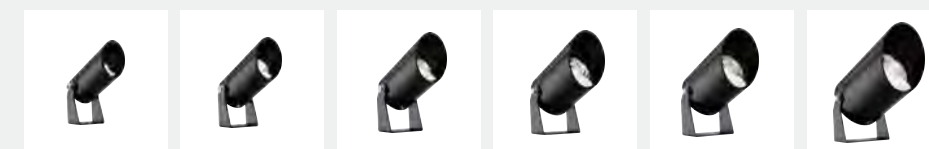

P141



P143



P147



P149



P151

Square


Square(Slanted Hat)

Square(Straight Hat)

Round(Slanted Hat)


Round(Straight Hat)

LED Landscape Spot Light -- Series 3H
Page 153-158

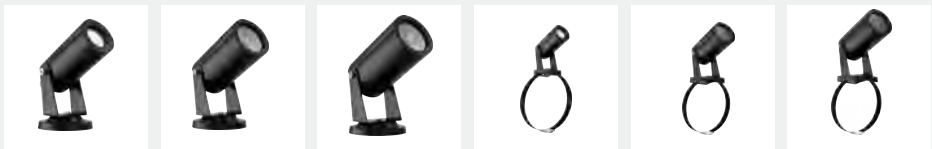


P153

P155




P157

LED Landscape Spot Light -- Series TW
Page 159-168

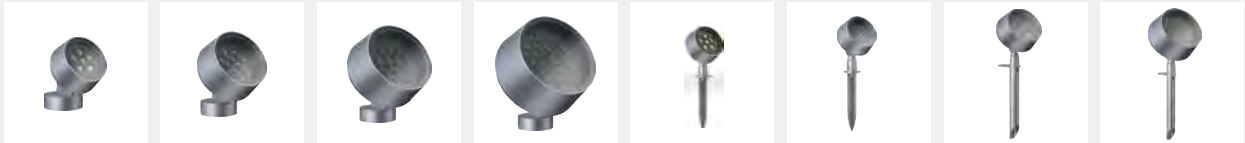

P163

P165

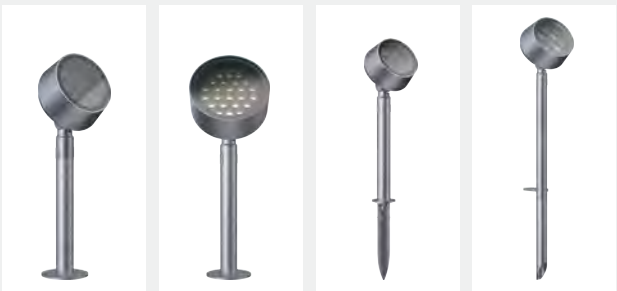


P167

LED Landscape Spot Light -- Series LS
Page 169-176



P171

P173

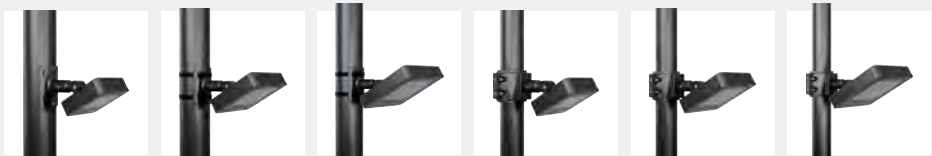

P175

LED Landscape Spot Light
Page 177-180



P177

P179




P191

P197



P199

P201

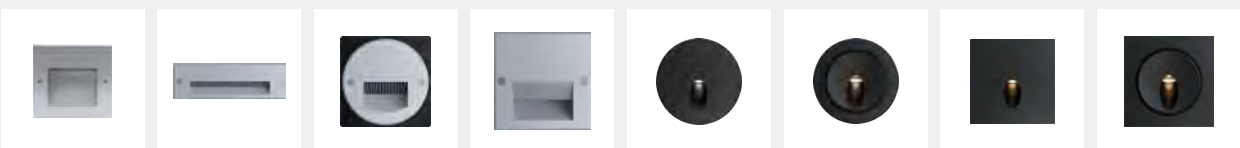

P203



P205

P207



LED Wall Light
Page 181-198

LED Step Light
Page 199-204

LED Window Light
Page 205-206

LED Handrail Light
Page 207-208

LED Recessed Underwater Light
Page 209~224



P217



P219



P221




P223

LED Fountain Light
Page 225~234



P233

LED Underwater Spot Light
Page 235~246

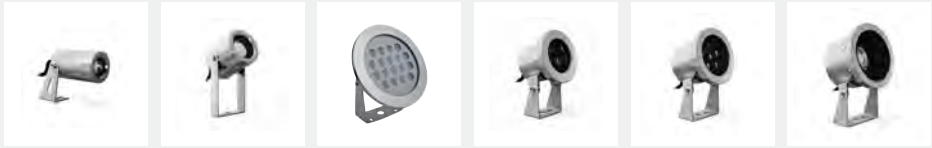

P243



P245

LED Wall Washer Light
Page 247~254



P253




LED IP66 Ceiling Light
Page 255~268



P263



P269

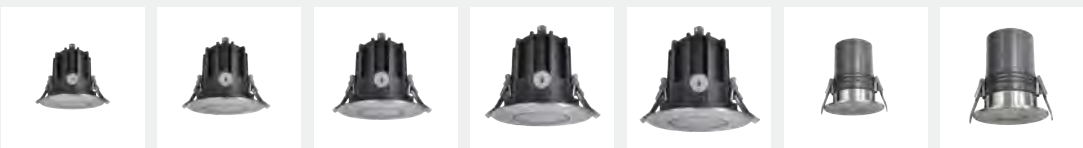

P269

LED IP67 Ceiling Light
Page 269~274



P275

P277

LED Garden Light
Page 275~286



P281


P279

EVO Series

In-ground luminaires stands out for special housing design and high quality optical components specifically for demanding visual tasks to provide enhanced visual comfort.



EVO Series
New Inground Light



Description

Housing made of 12# Die-casting aluminum with Tiger powder painting and Titanium chrome white SUS 316L front ring, applicable for outdoor installation, seaside and high pH environment.

Clear tempered safety glass, transmittance of light is over 95% and the accuracy of color temperature as well as strong impact resistance bearing capacity.

Quick & simple installation with low maintenance.

Sturdy construction in order to maintain performance of the luminaire and to reduce maintenance costs.

Applicable for outdoor installation, hotel, villa, facade, garden, residential.

- 


Honeycomb
- 

Radar Circle
- 

Surface Light
- 

Polarization (HK)
- 


Stretch Film (10°60°)



Application





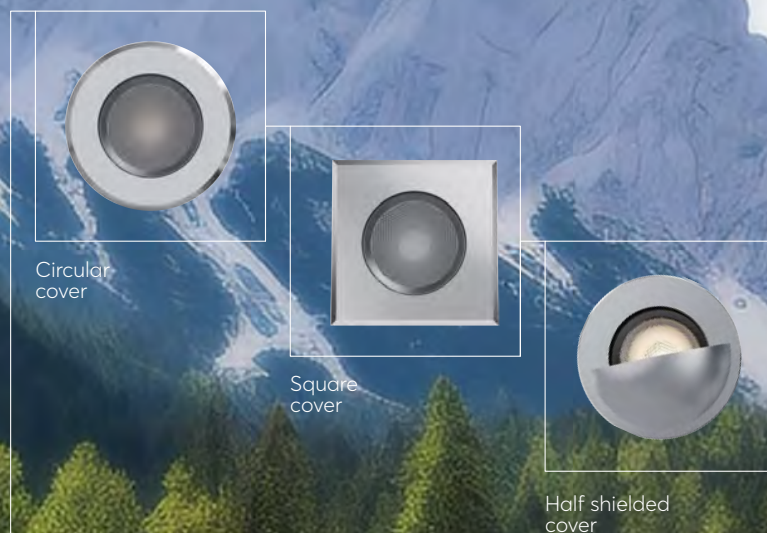

EVO Series

Corrosion-resistant die-casting aluminium body gives the luminaire good thermal conductivity, and large area connections between the rear of the housing and the led s pcb

Ensure good heat conduction.
Stainless steel screws, high strengt
4mm toughened glass >92% light transmittance.


Extremely narrow to wide beam options, rotationally symmetric light.
Installation on floor
(with mounting sleeve) and ground
(with or without mounting sleeve).

EVO Series Inground Light

EVO Series

Special face cover design and high-quality optical components, drilled for visual needs projects to provide enhanced visual effects, very suitable for non glare lighting, floodlighting in outdoor areas.


Lens

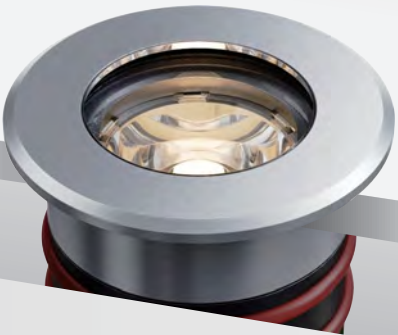


Lens
+honeycomb




Lens
+grille

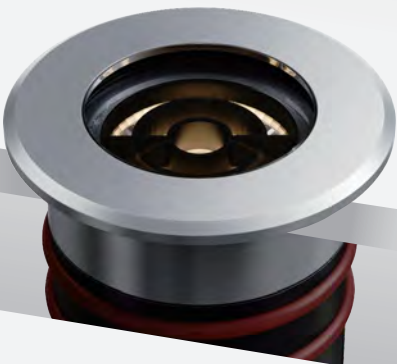


Diffuser

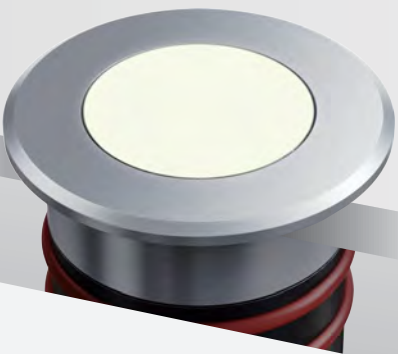


Walk Over

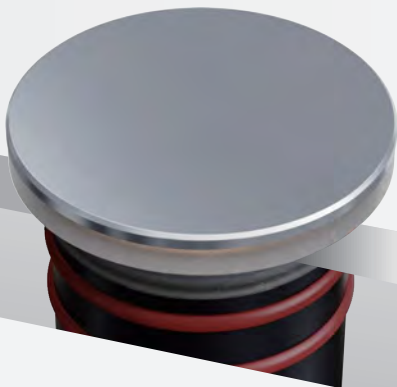

Half covered

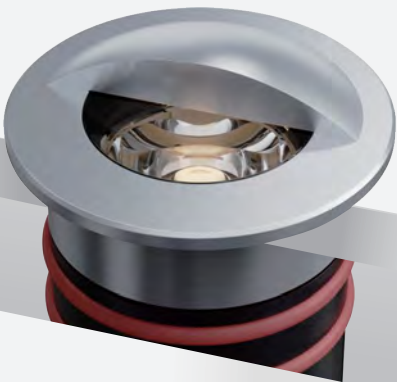

Lens
+silk print

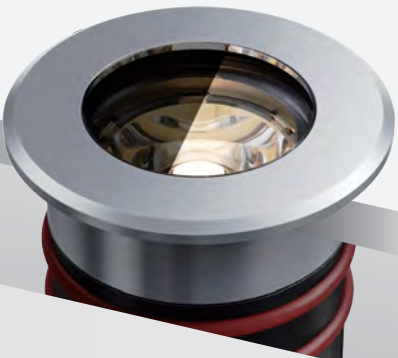


Trimless
+frosted glass



Trimless
+frosted glass
+silk print



Walk Over
+light sectors

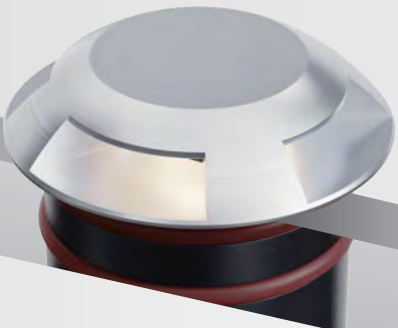




EVO Series Inground Light

CE ErP IP67 RoHS 1-10V Triac PWM DALI DMX RGB RGBW

AIG2032R



Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*2W CREE XPE/OSRAM 3030	Steel	IK10	120LM	12/24VDC	5°/10°/15°/20°/30°/40°/60°/10°45°/25°45°



AIG2065R



Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*6.5W CREE 1512	Steel	IK08	720LM	12/24VDC 220-240VAC	12°/24°/36°/55°



AIG2042R



Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*4W CREE 1304	Steel	IK08	340LM	12/24VDC 220-240VAC	15°/24°/36°/55°




AIG2080R



Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*10W CREE 1512	Steel	IK08	900LM	12/24VDC 220-240VAC	12°/24°/36°/55°




AIG2050R

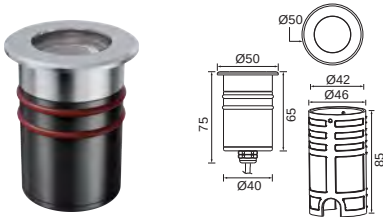

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*4.5W CREE 1304	Steel	IK08	454LM	12/24VDC 220-240VAC	12°/24°/36°/55°



AIG2100R

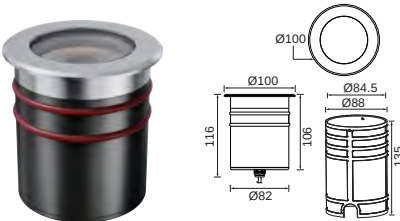


Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*15W CREE 1512	Steel	IK08	1300LM	12/24VDC 220-240VAC	12°/24°/36°/55°



EVO Series Inground Light

CE ErP IP67 RoHS 1-10V Triac PWM DALI DMX RGB RGBW


AIG2032S

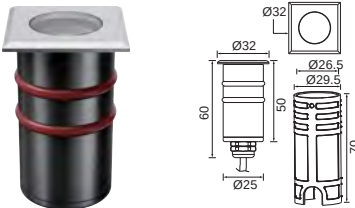

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*2W CREE XPE/OSRAM 3030	Steel	IK10	120LM	12/24VDC	5°/10°/15°/20°/30°/40°/60°/10°45°/25°45°




AIG2065S

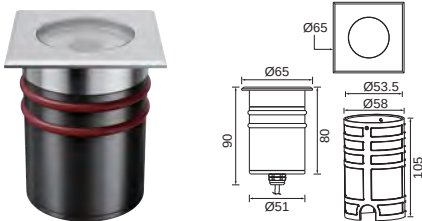

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*6.5W CREE 1512	Steel	IK08	720LM	12/24VDC 220-240VAC	12°/24°/36°/55°




AIG2042S

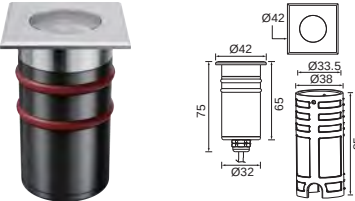

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*4W CREE 1304	Steel	IK08	340LM	12/24VDC 220-240VAC	15°/24°/36°/55°




AIG2080S

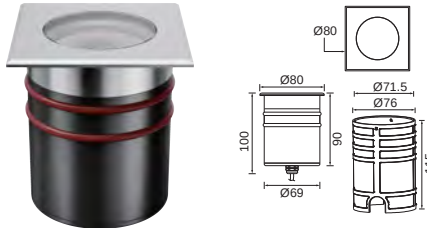

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*10W CREE 1512	Steel	IK08	900LM	12/24VDC 220-240VAC	12°/24°/36°/55°




AIG2050S

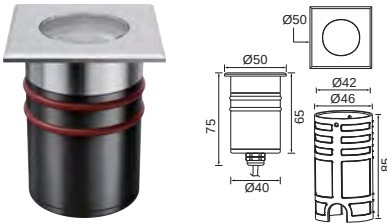

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*4.5W CREE 1304	Steel	IK08	454LM	12/24VDC 220-240VAC	12°/24°/36°/55°



AIG2100S

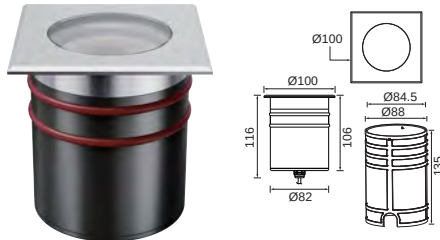

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*15W CREE 1512	Steel	IK08	1300LM	12/24VDC 220-240VAC	12°/24°/36°/55°





EVO Series Inground Light -- Half Covered

CE ErP IP67 RoHS 1-10V Triac PWM DALI DMX RGB RGBW

AIG2032R



Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*2W CREE XPE/OSRAM 3030	Steel	IK10	120LM	12/24VDC	5°/10°/15°/20°/30°/40°/60°/10°45°/25°45°



AIG2065R



Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*6.5W CREE 1512	Black	IK08	720LM	12/24VDC 220-240VAC	12°/24°/36°/55°




AIG2042R



Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*4W CREE 1304	Steel	IK08	340LM	12/24VDC 220-240VAC	15°/24°/36°/55°



AIG2080R

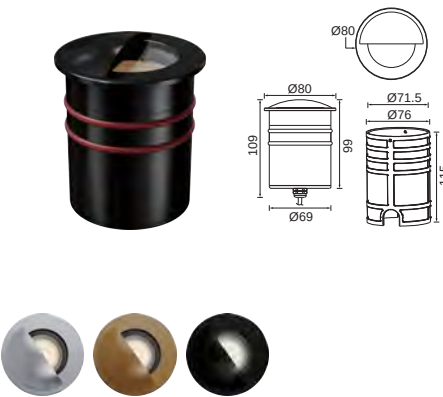

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*10W CREE 1512	Black	IK08	900LM	12/24VDC 220-240VAC	12°/24°/36°/55°



AIG2050R



Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*4.5W CREE 1304	Steel	IK08	454LM	12/24VDC 220-240VAC	12°/24°/36°/55°



AIG2100R



Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*15W CREE 1512	Black	IK08	1300LM	12/24VDC 220-240VAC	12°/24°/36°/55°





EVO Series Inground Light -- Trimless

CE ErP IP67 RoHS 1-10V Triac PWM DALI DMX RGB RGBW

AIG2032R



Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*2W CREE XPE/OSRAM 3030	Steel	IK10	120LM	12/24VDC	5°/10°/15°/20°/30°/40°/60°/10°/45°/25°/45°



AIG2065R



Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*6.5W CREE 1512	Steel	IK08	720LM	12/24VDC 220-240VAC	12°/24°/36°/55°



AIG2042R



Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*4W CREE 1304	Steel	IK08	340LM	12/24VDC 220-240VAC	15°/24°/36°/55°



AIG2080R



Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*10W CREE 1512	Steel	IK08	900LM	12/24VDC 220-240VAC	12°/24°/36°/55°



AIG2050R



Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*4.5W CREE 1304	Steel	IK08	454LM	12/24VDC 220-240VAC	12°/24°/36°/55°



AIG2100R



Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*15W CREE 1512	Steel	IK08	1300LM	12/24VDC 220-240VAC	12°/24°/36°/55°



Walk Over

Quick & simple installation
with low maintenance.

Sturdy construction in order to
maintain performance of the
luminaire and to
reducemaintenance costs.
Applicable for outdoor installation,
hotel,villa,facade, garden, redidential.



EVO Series Inground Light -- Walk Over




Evo Inground Light -- Walk Over



EVO Series Inground Light -- Walk Over

CE ErP IP67 RoHS 1-10V Triac PWM DALI DMX RGB RGBW


AIG2032R

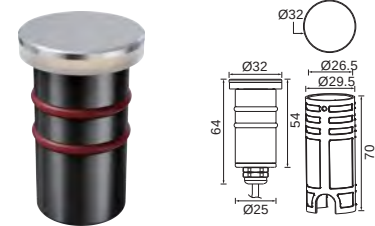

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*2W CREE XPE/OSRAM 3030	Steel	IK10	--	12/24VDC	360°




AIG2065R

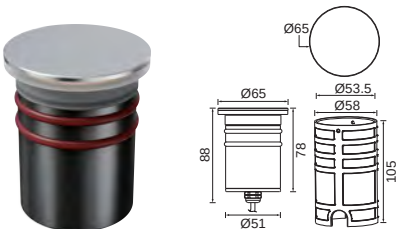

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*6.5W CREE 1512	Steel	IK08	--	12/24VDC 220-240VAC	360°




AIG2042R

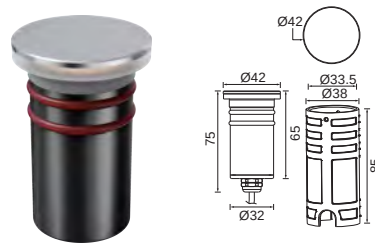

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*4W CREE 1304	Steel	IK08	--	12/24VDC 220-240VAC	360°




AIG2080R

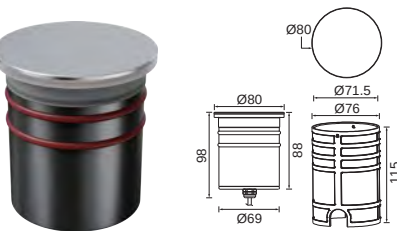

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*10W CREE 1512	Steel	IK08	--	12/24VDC 220-240VAC	360°




AIG2050R

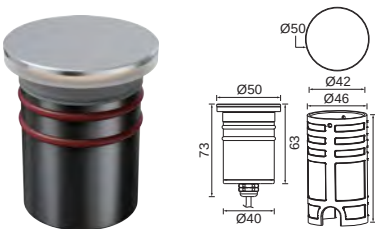

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*4.5W CREE 1304	Steel	IK08	--	12/24VDC 220-240VAC	360°



AIG2100R

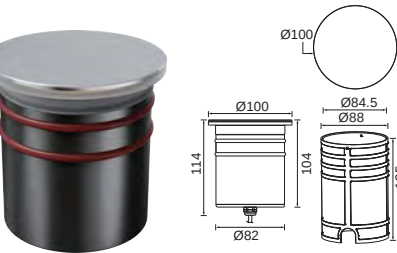

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*15W CREE 1512	Steel	IK08	--	12/24VDC 220-240VAC	360°






Evo series Inground Light -- Walk Over

EVO Series Inground Light -- Walk Over

CE ErP IP67 RoHS 1-10V Triac PWM DALI DMX RGB RGBW


AIG2035R-1WAY/2WAY/4WAY

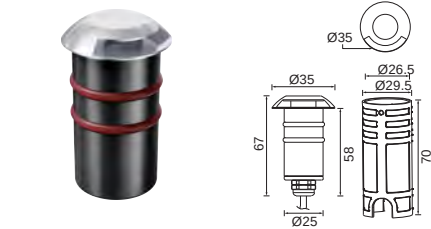

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*2W CREE XPE/OSRAM 3030	Steel	IK10	--	12/24VDC	1/2/4way



AIG2065R-1WAY/2WAY/4WAY

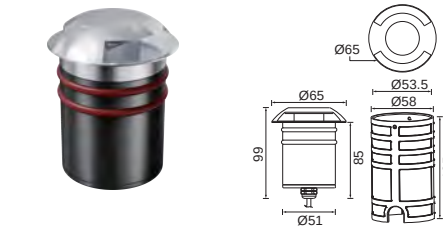

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*6.5W CREE 1512	Steel	IK08	--	12/24VDC 220-240VAC	1/2/4way




AIG2045R-1WAY/2WAY/4WAY



Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*4W CREE 1304	Steel	IK08	--	12/24VDC 220-240VAC	1/2/4way



AIG2085R-1WAY/2WAY/4WAY

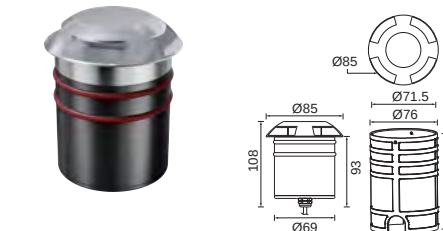

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*10W CREE 1512	Steel	IK08	--	12/24VDC 220-240VAC	1/2/4way



AIG2055R-1WAY/2WAY/4WAY



Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*4.5W CREE 1304	Steel	IK08	--	12/24VDC 220-240VAC	1/2/4way



AIG2100R-1WAY/2WAY/4WAY



Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*15W CREE 1512	Steel	IK08	--	12/24VDC 220-240VAC	1/2/4way




LED Inground Light

Housing made of 12# Die-casting aluminum with Tiger powder painting and Titanium chrome white SUS 316L front ring, applicable for outdoor installation, seaside and high pH environment.

Clear tempered safety glass, transmittance of light is over 95% and the accuracy of color temperature as well as strong impact resistance bearing capacity.




Beam Direction
Adjustable
In-ground Light

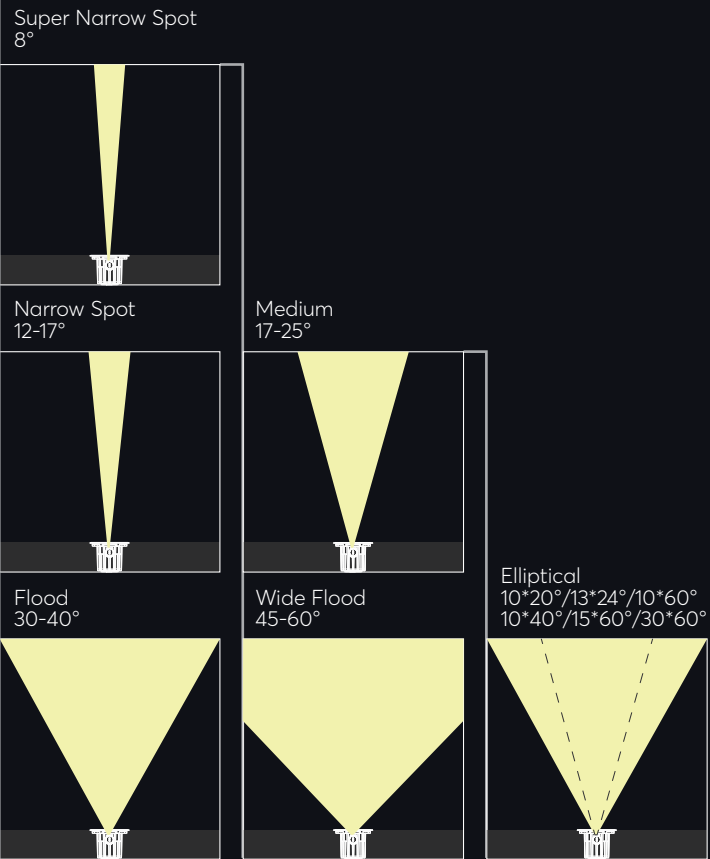




Uplights



	Narrow Spot
	Spot
	Flood
	Oval Flood

Uplights for precise grazing light on facades or objects.


Lens Wallwasher



	Wallwash
--	----------

Lens wallwashers for an exceptionally uniform brightness distribution on vertical surfaces.

Directional Luminaires



Asymmetrical light distribution for accent lighting.

Series AY

30 degree adjustable in clockwise or anti-clockwise, 0/10/20/30 graduations for beam direction adjustability.

Make the light beam at the most reasonable direction toward the illuminated objects.





Series AY Inground Light



In-ground luminaires stands out for special housing design and high quality optical components

specifically for demanding visual tasks to provide enhanced visual comfort.

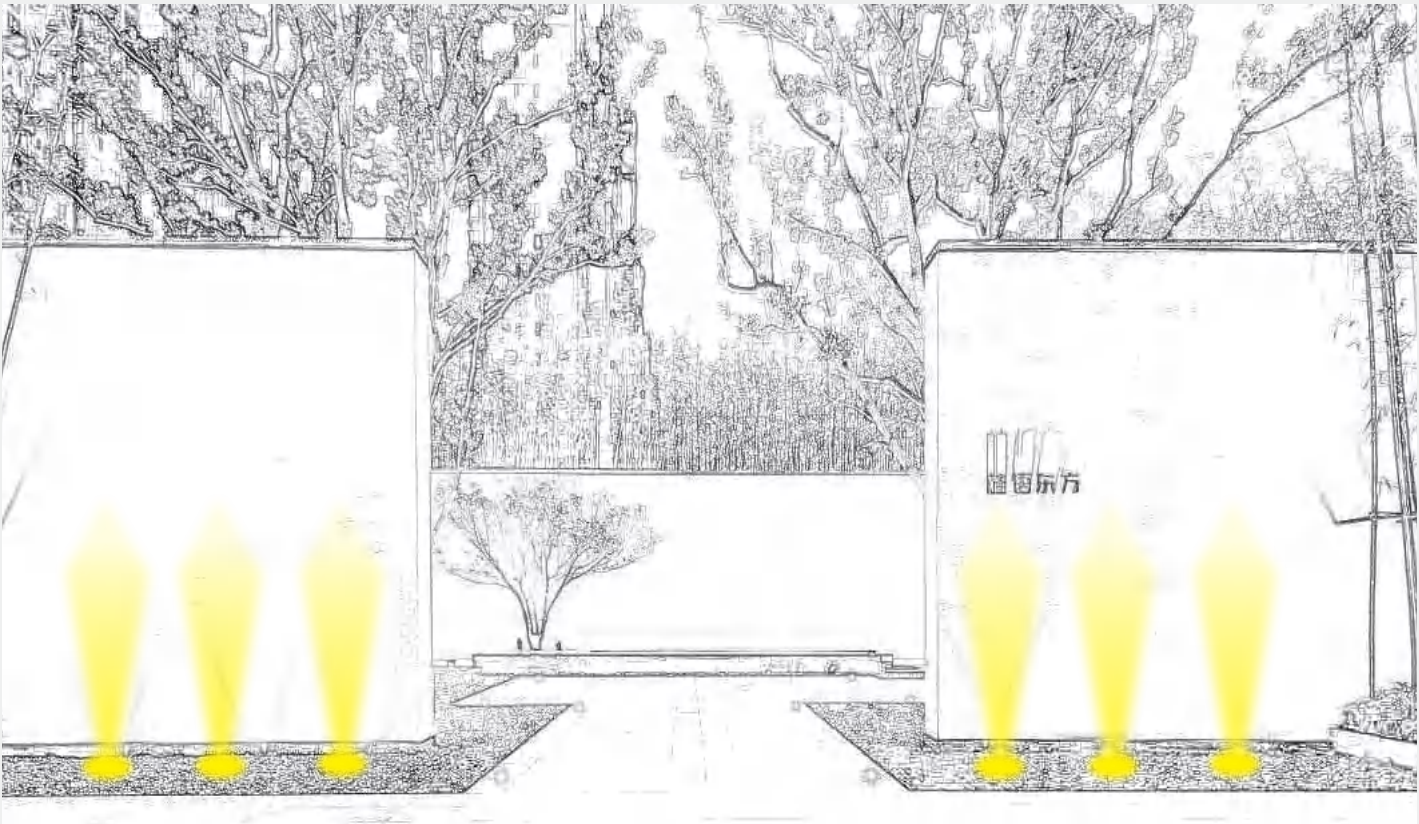

Material Quality
12# Die-casting powder coated aluminum housing
Titanium chrome white SUS 316L front cover
Tempered glass.



LED
CREE/OSRAM/BRIDGELUX, CRI>80(CRI>90 on request)
Cable 0.5m
ABS Mounting sleeve



Quality/Supporting
IP67 IK10
Life time ≥50000 hrs
Operating temperature -20 C ~40 C


The external light direction of the lamp can be adjusted at around 25 degrees, and the unique spherical heat dissipation structure is adopted to ensure sufficient heat dissipation of the LED, so that the lamp can achieve a long service life.




LED Adjustable Inground Light




AIG2095R

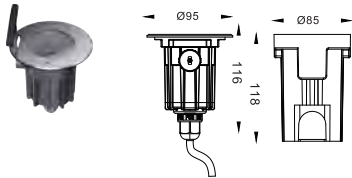


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x2W	OSRAM/CREE	Single	IK10	157lm	12/24 VDC/220-240VAC	5°/8°/15°/25°/40°/60°/10°45°/20°65°
1x3W	OSRAM	RGB 3in 1	IK10	60lm	12/24 VDC	12°/25°/40°/60°
1x4W	OSRAM	RGBW 4in 1	IK10	80lm	12/24 VDC	12°/25°/40°/60°




AIG2210R

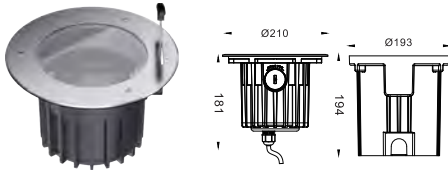


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
9x3W	CREE	Single	IK10	1800lm	12/24 VDC/220-240VAC	3°/8°
12x2W	OSRAM/CREE	Single	IK10	1850lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°45°/20°65°
9x2.5W	OSRAM	RGB 3in 1	IK10	730lm	12/24 VDC	12°/25°/40°/60°
9x3.5W	OSRAM	RGBW 4in 1	IK10	978lm	12/24 VDC	12°/25°/40°/60°




AIG2130R

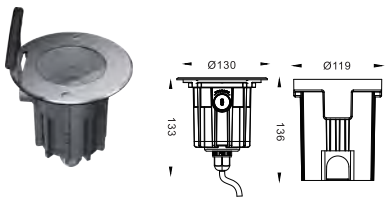


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
2x3W	CREE	Single	IK10	465lm	12/24 VDC/220-240VAC	3°/8°
3x2W	OSRAM/CREE	Single	IK10	465lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°45°/20°65°
2x3W	OSRAM	RGB 3in 1	IK10	135lm	12/24 VDC	12°/25°/40°/60°
2x4W	OSRAM	RGBW 4in 1	IK10	182lm	12/24 VDC	12°/25°/40°/60°




AIG2250R

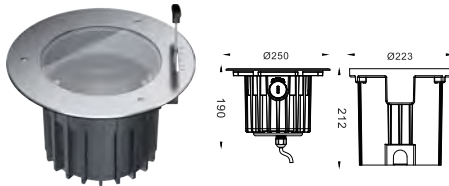


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x3W	CREE	Single	IK10	2800lm	12/24 VDC/220-240VAC	3°/8°
18x2W	OSRAM/CREE	Single	IK10	2800lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°45°/20°65°
12x3W	OSRAM	RGB 3in 1	IK10	825lm	12/24 VDC	12°/25°/40°/60°
12x4W	OSRAM	RGBW 4in 1	IK10	1100lm	12/24 VDC	12°/25°/40°/60°




AIG2160R

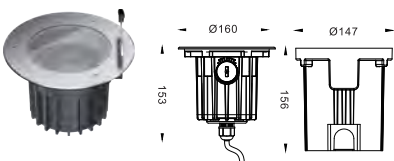


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
4x3W	CREE	Single	IK10	920lm	12/24 VDC/220-240VAC	3°/8°
6x2W	OSRAM/CREE	Single	IK10	920lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°45°/20°65°
4x2.5W	OSRAM	RGB 3in 1	IK10	250lm	12/24 VDC	12°/25°/40°/60°
4x3.5W	OSRAM	RGBW 4in 1	IK10	430lm	12/24 VDC	12°/25°/40°/60°




AIG2180R

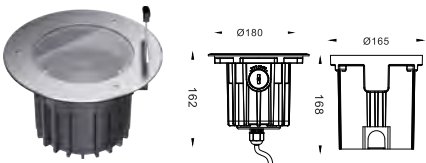


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x3W	CREE	Single	IK10	1310lm	12/24 VDC/220-240VAC	3°/8°
9x2W	OSRAM/CREE	Single	IK10	1310lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°45°/20°65°
6x2.5W	OSRAM	RGB 3in 1	IK10	425lm	12/24 VDC	12°/25°/40°/60°
6x3.5W	OSRAM	RGBW 4in 1	IK10	568lm	12/24 VDC	12°/25°/40°/60°




Angle Adjustment Diagram



Adjust to the angle you want



Install the stainless steel small cover plate




Tighten the screws to complete




LED Adjustable Inground Light

CE ErP IP67 RoHS 1-10V Triac PWM DALI 12V RGB RGBW


AIG2130R

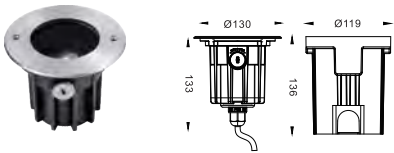


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x6W	CREE COB	Single	IK10	465lm	12/24 VDC/220-240VAC	18°/24°/38°/60°




AIG2160R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x12W	CREE COB	Single	IK10	1120lm	12/24 VDC/220-240VAC	18°/24°/38°/60°




AIG2180R

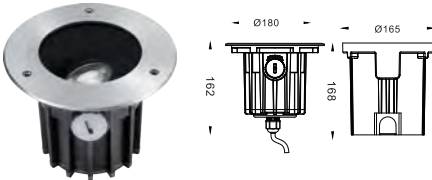


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x20W	CREE COB	Single	IK10	1438lm	12/24 VDC/220-240VAC	18°/24°/38°/60°




AIG2210R

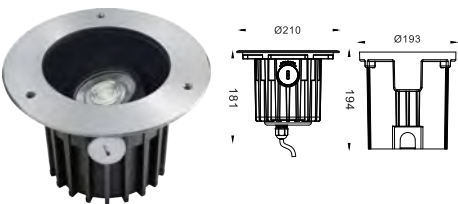


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x25W	CREE COB	Single	IK10	2130lm	12/24 VDC/220-240VAC	18°/24°/38°/60°




AIG2250R

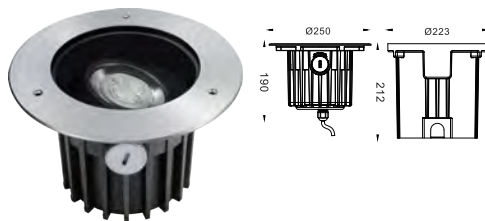

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x36W	CREE COB	Single	IK10	2986lm	12/24 VDC/220-240VAC	18°/24°/38°/60°



Angle Adjustment Diagram






Adjust to the angle you want



LED Adjustable Inground Light




CE ErP IP67 RoHS 1-10V Triac PWM DALI 12V RGB RGBW

AIG2095R






Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x2W	OSRAM/CREE	Single	IK10	157lm	12/24 VDC/220-240VAC	5°/8°/15°/25°/40°/60°/10°45°/20°65°
1x3W	OSRAM	RGB 3in 1	IK10	60lm	12/24 VDC	12°/25°/40°/60°
1x4W	OSRAM	RGBW 4in 1	IK10	80lm	12/24 VDC	12°/25°/40°/60°

AIG2130R






Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
2x3W	CREE	Single	IK10	465lm	12/24 VDC/220-240VAC	3°/8°
3x2W	OSRAM/CREE	Single	IK10	465lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°45°/20°65°
2x3W	OSRAM	RGB 3in 1	IK10	135lm	12/24 VDC	12°/25°/40°/60°
2x4W	OSRAM	RGBW 4in 1	IK10	182lm	12/24 VDC	12°/25°/40°/60°

AIG2160R






Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
4x3W	CREE	Single	IK10	920lm	12/24 VDC/220-240VAC	3°/8°
6x2W	OSRAM/CREE	Single	IK10	920lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°45°/20°65°
4x2.5W	OSRAM	RGB 3in 1	IK10	250lm	12/24 VDC	12°/25°/40°/60°
4x3.5W	OSRAM	RGBW 4in 1	IK10	430lm	12/24 VDC	12°/25°/40°/60°

AIG2180R






Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x3W	CREE	Single	IK10	1310lm	12/24 VDC/220-240VAC	3°/8°
9x2W	OSRAM/CREE	Single	IK10	1310lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°45°/20°65°
6x2.5W	OSRAM	RGB 3in 1	IK10	425lm	12/24 VDC	12°/25°/40°/60°
6x3.5W	OSRAM	RGBW 4in 1	IK10	568lm	12/24 VDC	12°/25°/40°/60°

AIG2210R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
9x3W	CREE	Single	IK10	1800lm	12/24 VDC/220-240VAC	3°/8°
12x2W	OSRAM/CREE	Single	IK10	1850lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°45°/20°65°
9x2.5W	OSRAM	RGB 3in 1	IK10	730lm	12/24 VDC	12°/25°/40°/60°
9x3.5W	OSRAM	RGBW 4in 1	IK10	978lm	12/24 VDC	12°/25°/40°/60°

AIG2250R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x3W	CREE	Single	IK10	2800lm	12/24 VDC/220-240VAC	3°/8°
18x2W	OSRAM/CREE	Single	IK10	2800lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°45°/20°65°
12x3W	OSRAM	RGB 3in 1	IK10	825lm	12/24 VDC	12°/25°/40°/60°
12x4W	OSRAM	RGBW 4in 1	IK10	1100lm	12/24 VDC	12°/25°/40°/60°

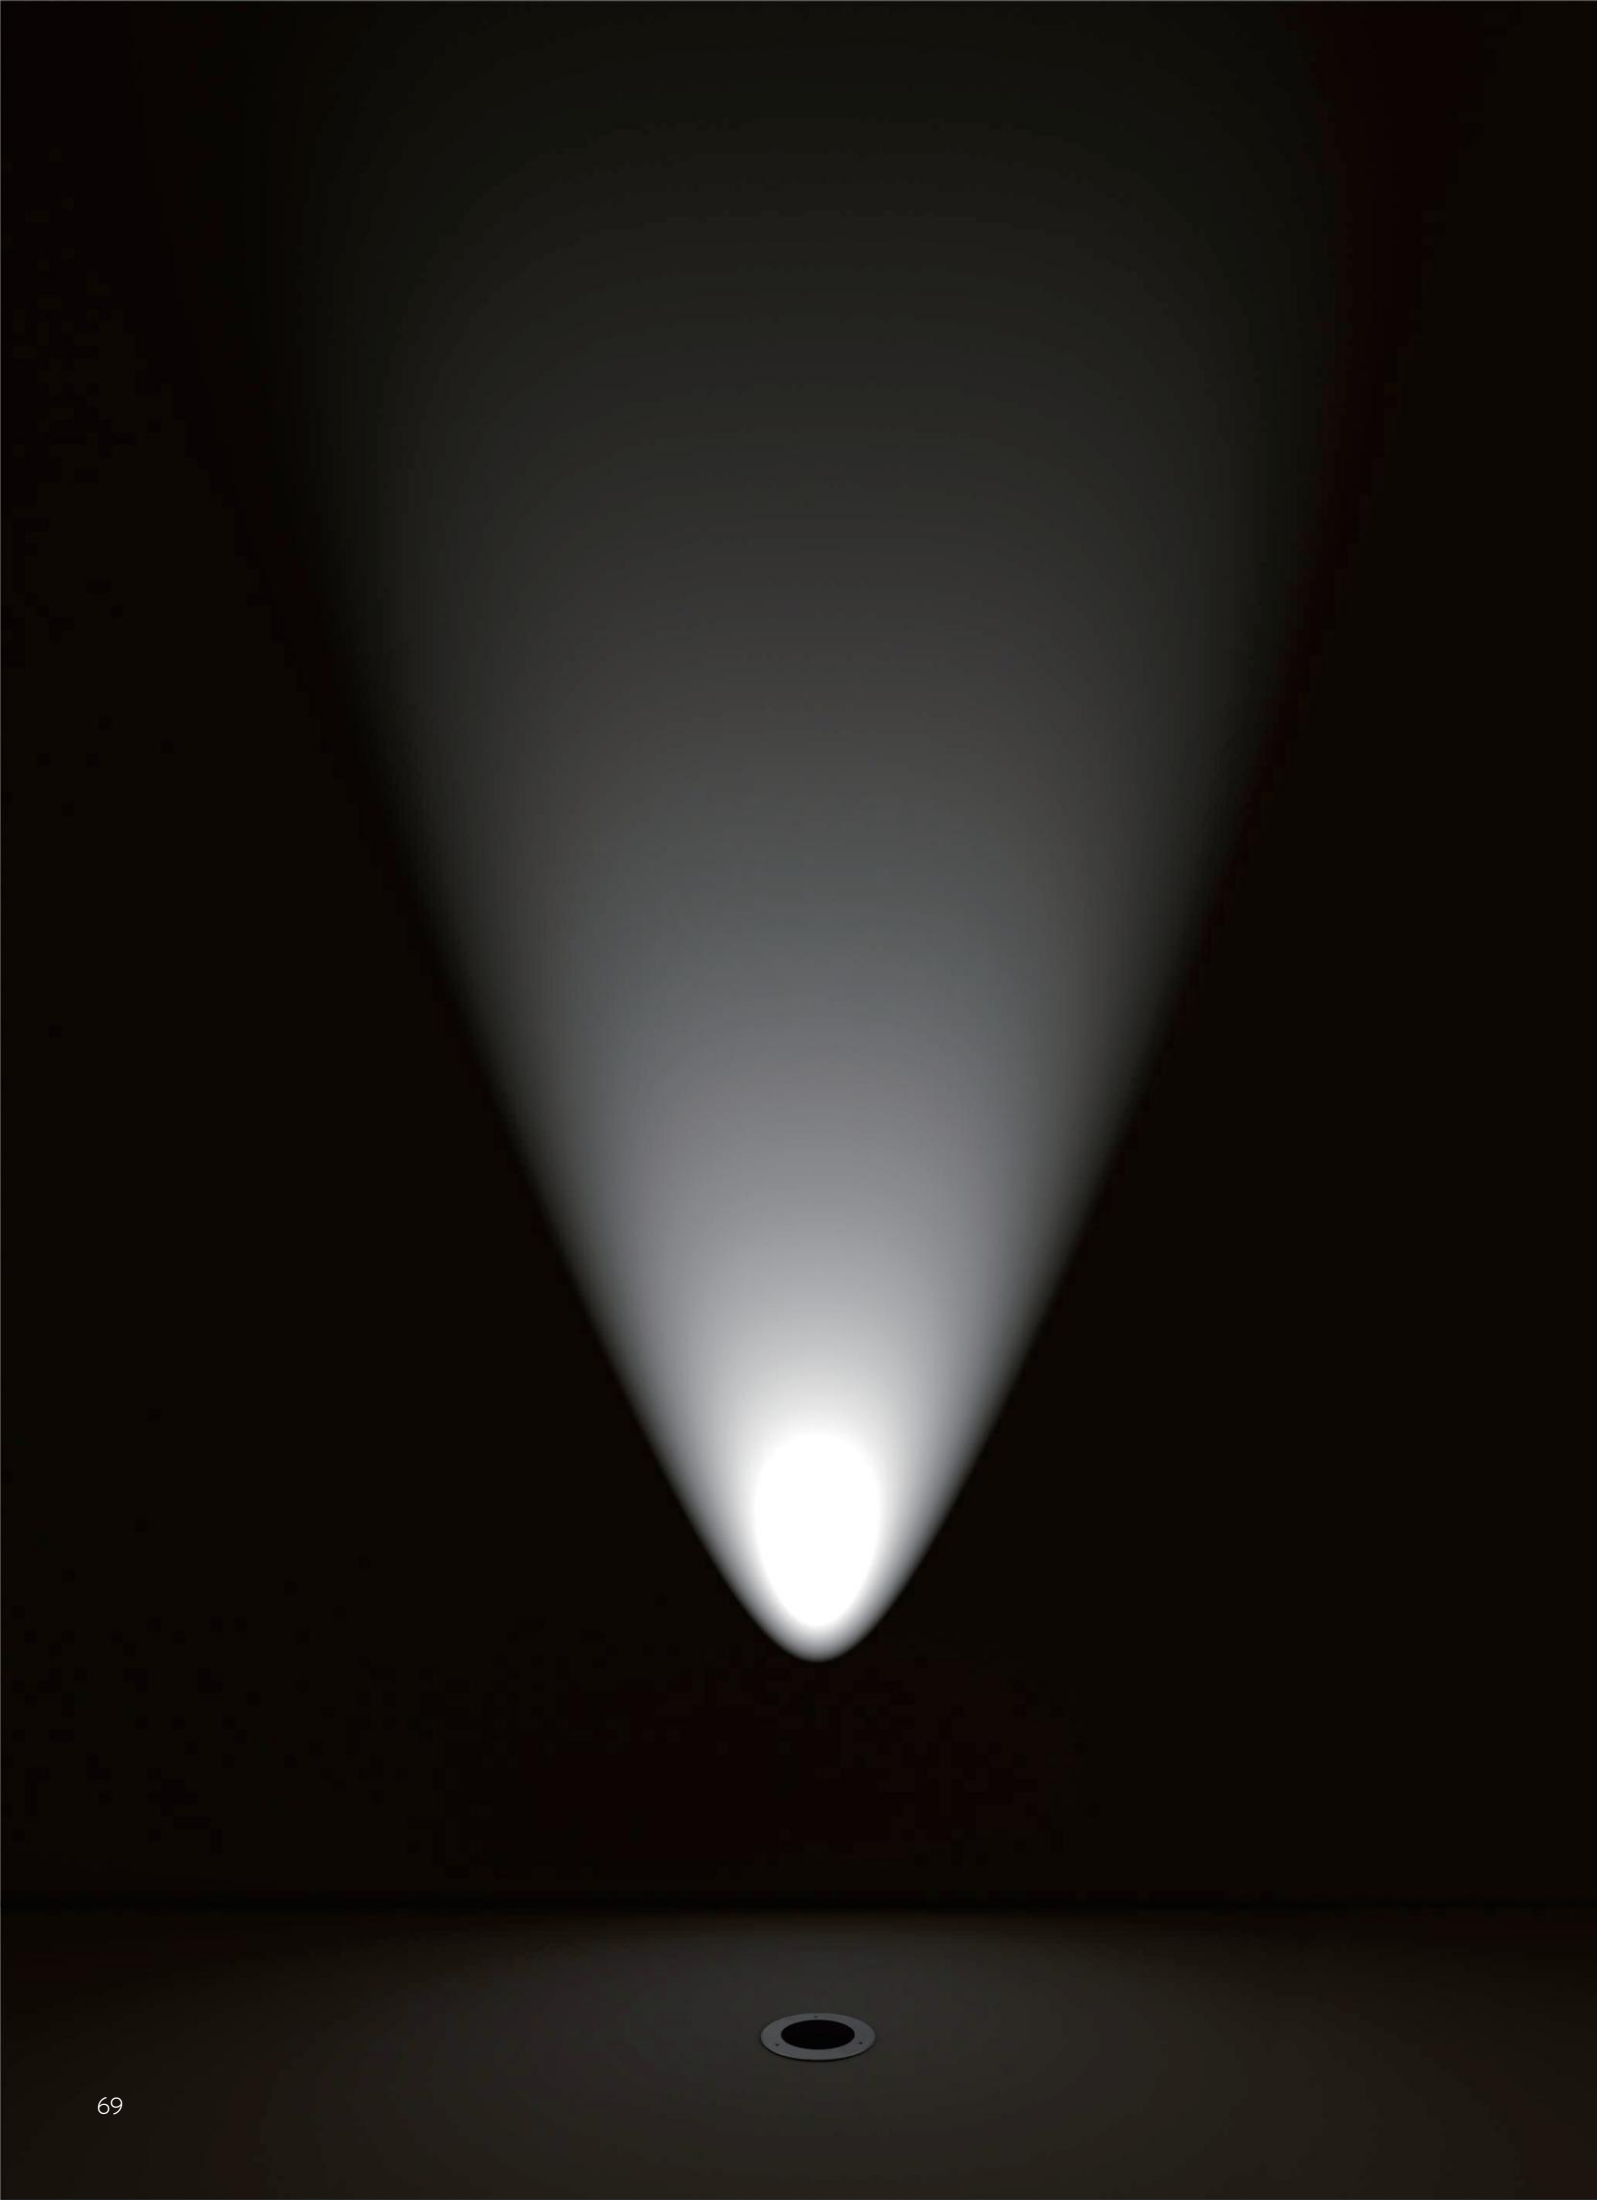


LED Depth Illuminant Inground Light

CE ErP IP67 RoHS 1-10V Triac PWM DALI 12V RGB RGBW


AIG2095R

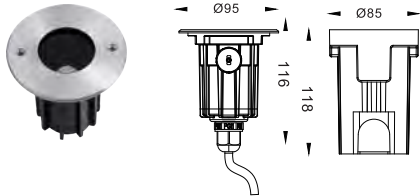


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x2W	OSRAM/CREE	Single	IK10	141lm	12/24 VDC/220-240VAC	5°/8°/15°/25°/40°/60°/10°45°/20°65°
1x3W	OSRAM	RGB 3in 1	IK10	60lm	12/24 VDC	12°/25°/40°/60°
1x4W	OSRAM	RGBW 4in 1	IK10	80lm	12/24 VDC	12°/25°/40°/60°




AIG2210R

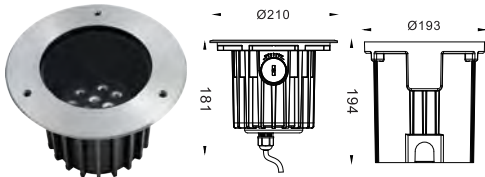


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x2W	OSRAM/CREE	Single	IK10	1424lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°45°/20°65°
12x2.5W	OSRAM	RGB 3in 1	IK10	620lm	12/24 VDC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in 1	IK10	820lm	12/24 VDC	25°/40°/60°




AIG2130R

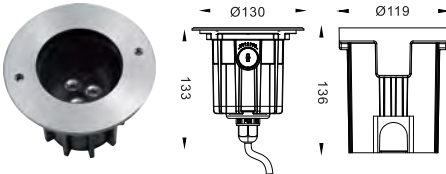


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x2W	OSRAM/CREE	Single	IK10	418lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°45°/20°65°
3x3W	OSRAM	RGB 3in 1	IK10	128lm	12/24 VDC	25°/40°/60°
3x4W	OSRAM	RGBW 4in 1	IK10	228lm	12/24 VDC	25°/40°/60°




AIG2250R

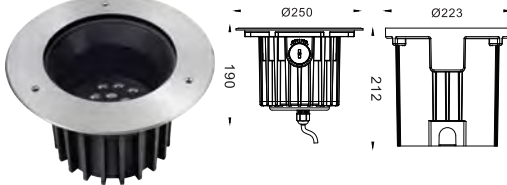


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
18x2W	OSRAM/CREE	Single	IK10	2240lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°45°/20°65°
18x3W	OSRAM	RGB 3in 1	IK10	780lm	12/24 VDC	25°/40°/60°
18x4W	OSRAM	RGBW 4in 1	IK10	1170lm	12/24 VDC	25°/40°/60°




AIG2160R

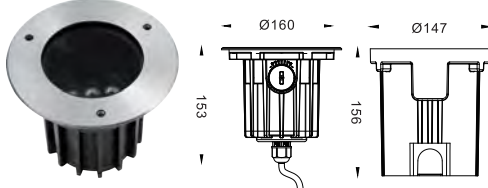


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W	OSRAM/CREE	Single	IK10	855lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°45°/20°65°
6x2.5W	OSRAM	RGB 3in 1	IK10	250lm	12/24 VDC	25°/40°/60°
6x3.5W	OSRAM	RGBW 4in 1	IK10	430lm	12/24 VDC	25°/40°/60°



AIG2180R

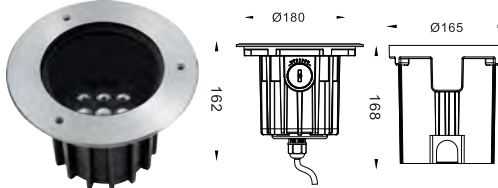

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
9x2W	OSRAM/CREE	Single	IK10	990lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°45°/20°65°
9x2.5W	OSRAM	RGB 3in 1	IK10	380lm	12/24 VDC	25°/40°/60°
9x3.5W	OSRAM	RGBW 4in 1	IK10	410lm	12/24 VDC	25°/40°/60°







LED Depth Illuminant Inground Light

CE ErP IP67 RoHS 1-10V Triac PWM DALI 12V RGB RGBW


AIG2130R

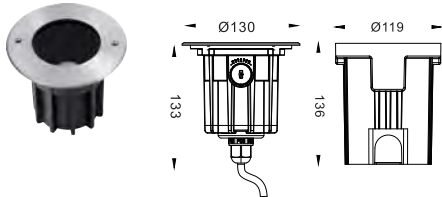


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x6W	CREE COB	Single	IK10	418lm	12/24 VDC/220-240VAC	18°/24°/38°/60°




AIG2250R

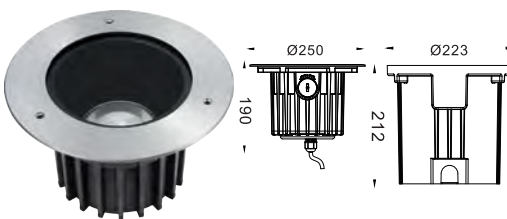


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x36W	CREE COB	Single	IK10	2030lm	12/24 VDC/220-240VAC	18°/24°/38°/60°




AIG2160R

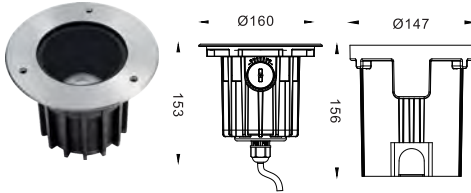


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x12W	CREE COB	Single	IK10	1120lm	12/24 VDC/220-240VAC	18°/24°/38°/60°




AIG2180R

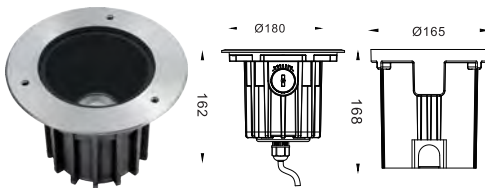


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x20W	CREE COB	Single	IK10	1245lm	12/24 VDC/220-240VAC	18°/24°/38°/60°



AIG2210R

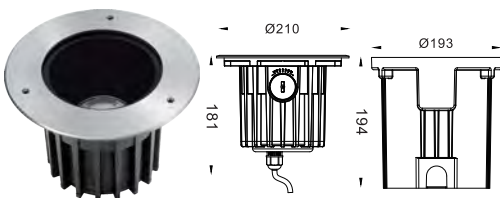

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x25W	CREE COB	Single	IK10	2030lm	12/24 VDC/220-240VAC	18°/24°/38°/60°






LED COB Asymmetric Inground Light

CE ErP IP67 RoHS 1-10V Triac PWM DALI 512 RGB RGBW


AIG2095R1AB6Y



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x3W	CREE	Single	IK10	250lm	12/24 VDC/220-240VAC	Asymmetric




AIG2210R1AB6Y



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x25W	CREE	Single	IK10	1900lm	12/24 VDC/220-240VAC	Asymmetric




AIG2130R1AB6Y



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x6W	CREE	Single	IK10	450lm	12/24 VDC/220-240VAC	Asymmetric




AIG2250R1AB6Y



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x36W	CREE	Single	IK10	2600lm	12/24 VDC/220-240VAC	Asymmetric




AIG2160R1AB6Y



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x13W	CREE	Single	IK10	980lm	12/24 VDC/220-240VAC	Asymmetric



AIG2180R1AB6Y



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x20W	CREE	Single	IK10	1100lm	12/24 VDC/220-240VAC	Asymmetric







LED COB Reflector Inground Light

CE ErP IP67 RoHS 1-10V Triac PWM DALI 50/60Hz


AIG2095R1AB4Y

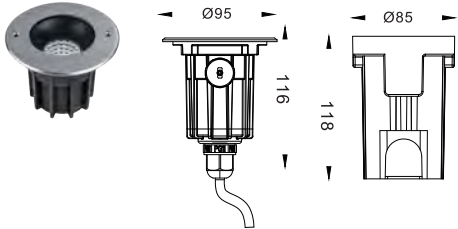


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x4W	CREE	Single	IK10	190lm	12/24 VDC/220-240VAC	20°/30°/40°




AIG2210R1AB4Y

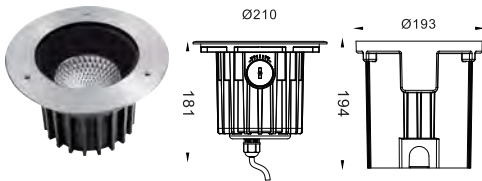


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x25W	CREE	Single	IK10	2030lm	12/24 VDC/220-240VAC	20°/30°/40°




AIG2130R1AB4Y

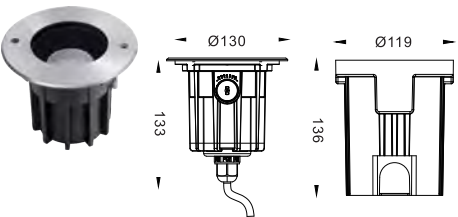


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x6W	CREE	Single	IK10	350lm	12/24 VDC/220-240VAC	20°/30°/40°




AIG2250R1AB4Y

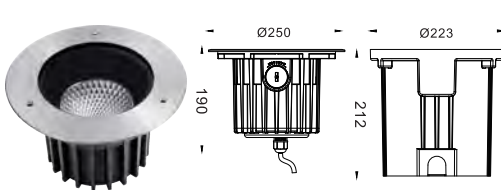


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x35W	CREE	Single	IK10	2780lm	12/24 VDC/220-240VAC	20°/30°/40°




AIG2160R1AB4Y

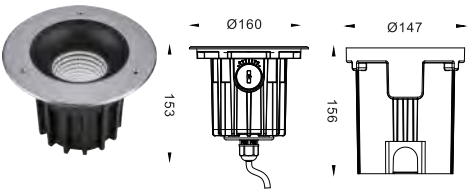


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x13W	CREE	Single	IK10	1120lm	12/24 VDC/220-240VAC	20°/30°/40°



AIG2180R1AB4Y

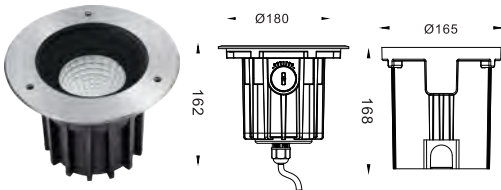


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x20W	CREE	Single	IK10	1250lm	12/24 VDC/220-240VAC	20°/30°/40°





LED Inground Light


AIG2010R



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x0.3W	OSRAM	Single	IK04	11lm	12 VDC	120°




AIG2020R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x0.5W	OSRAM	Single	IK04	55lm	12 VDC	120°




AIG2030R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x1W	OSRAM	Single	IK04	66lm	12/24 VDC	120°




AIG2030R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x1W	OSRAM	Single	IK04	66lm	12/24 VDC	30°/60°




AIG2038R

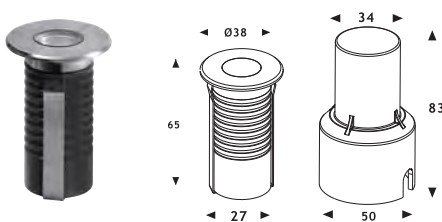


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x1.5W	CREE/OSRAM	Single	IK07	110lm	12/24 VDC	25°/40°/60°




AIG2038S

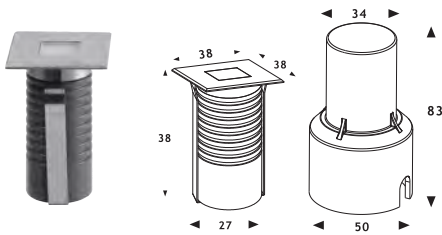


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x1.5W	CREE/OSRAM	Single	IK07	110lm	12/24 VDC	25°/40°/60°




AIG2045R

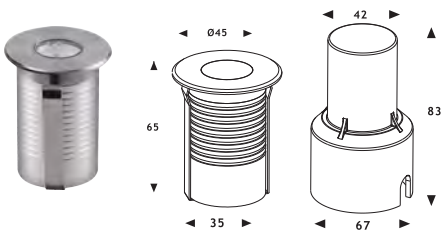


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x2W	OSRAM/CREE	Single	IK08	130lm	12/24 VDC/220-240VAC	25°/40°/60°
1x3W	EPISTAR	RGB	IK08	130lm	12/24 VDC	25°/40°/60°



AIG2045S

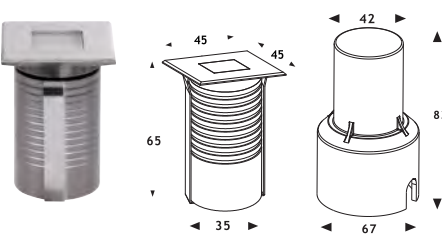




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x2W	OSRAM/CREE	Single	IK08	130lm	12/24 VDC/220-240VAC	120°
1x3W	OSRAM/CREE	RGB	IK08	130lm	12/24 VDC	120°



LED COB Inground Light






AIG2070R





Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x4W	CREE COB	Single	IK09	398lm	12/24 VDC	15°/24°/36°/60°
1x5W	CREE COB	Single	IK09	508lm	12/24 VDC/220-240VAC	15°/24°/36°/60°
1x6W	OSRAM	RGB 3in 1	IK09	170lm	12/24 VDC	15°/25°/40°/60°
1x8W	OSRAM	RGBW 4in 1	IK09	225lm	12/24 VDC	15°/25°/40°/60°

AIG2070S





Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x5W	CREE COB	Single	IK09	508lm	12/24 VDC/220-240VAC	15°/24°/36°/60°
1x6W	OSRAM	RGB 3in 1	IK09	170lm	12/24 VDC	15°/25°/40°/60°
1x8W	OSRAM	RGBW 4in 1	IK09	225lm	12/24 VDC	15°/25°/40°/60°

AIG2116R2A





Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x6W	CREE COB	Single	IK09	530lm	12/24 VDC/220-240VAC	15°/24°/38°/60°

AIG2116R2C





Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x13W	CREE COB	Single	IK09	1352lm	12/24 VDC/220-240VAC	15°/24°/38°/60°

AIG2080R





Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x9W	CREE COB	Single	IK09	904lm	12/24 VDC/220-240VAC	15°/24°/36°/60°
1x9W	OSRAM	RGB 3in 1	IK09	241lm	12/24 VDC	15°/25°/40°/60°
1x10W	OSRAM	RGBW 4in 1	IK09	281lm	12/24 VDC	15°/25°/40°/60°

AIG2080S





Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x9W	CREE COB	Single	IK09	904lm	12/24 VDC/220-240VAC	15°/24°/36°/60°
1x9W	OSRAM	RGB 3in 1	IK09	241lm	12/24 VDC	15°/25°/40°/60°
1x10W	OSRAM	RGBW 4in 1	IK09	281lm	12/24 VDC	15°/25°/40°/60°

AIG2173R



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x13W	CREE COB	Single	IK09	1492lm	12/24 VDC/220-240VAC	15°/24°/38°/60°

AIG2186R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x25W	CREE COB	Single	IK09	2520lm	12/24 VDC/220-240VAC	15°/24°/38°/60°


LED Inground Light




AIG2055R

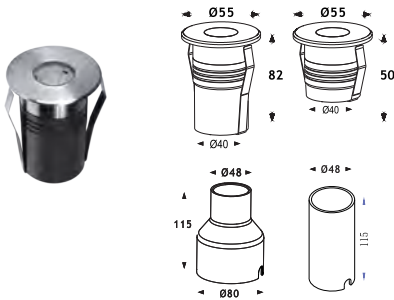


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x2W	CREE/OSRAM	Single	IK08	120lm	12/24 VDC/220-240VAC	8°/12°/25°/40°/60°/10°45°/25°60°
1x3W	CREE/OSRAM	RGB 3in 1	IK08	50lm	12/24 VDC	12°/25°/40°/60°/10°45°/25°60°
1x4W	CREE/OSRAM	RGBW 4in 1	IK08	60lm	12/24 VDC	12°/25°/40°/60°/10°45°/25°60°




AIG2055S

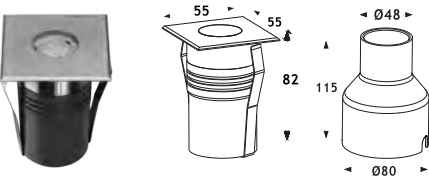

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x2W	CREE/OSRAM	Single	IK08	120lm	12/24 VDC/220-240VAC	8°/12°/25°/40°/60°/10°45°/25°60°
1x3W	CREE/OSRAM	RGB 3in 1	IK08	50lm	12/24 VDC	12°/25°/40°/60°/10°45°/25°60°
1x4W	CREE/OSRAM	RGBW 4in 1	IK08	60lm	12/24 VDC	12°/25°/40°/60°/10°45°/25°60°




AIG2116R

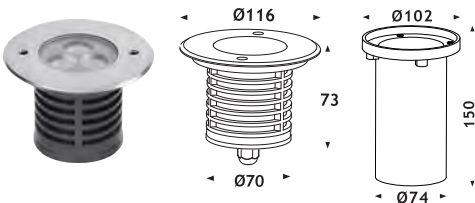

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x2W	CREE/OSRAM	Single	IK08	530lm	12/24 VDC/220-240VAC	5°/10°/25°/40°/60°/10°45°/25°60°
3x2.5W	OSRAM	RGB 3in 1	IK08	210lm	12/24 VDC	12°/25°/40°/60°/12°45°
3x3.5W	OSRAM	RGBW 4in 1	IK08	310lm	12/24 VDC	12°/25°/40°/60°/12°45°




AIG2116S

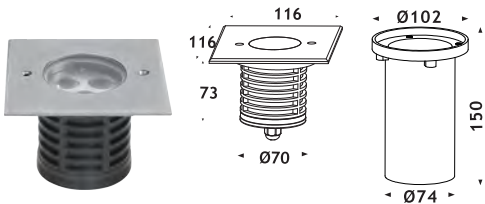


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x2W	CREE/OSRAM	Single	IK08	530lm	12/24 VDC/220-240VAC	5°/10°/25°/40°/60°/10°45°/25°60°
3x2.5W	OSRAM	RGB 3in 1	IK08	210lm	12/24 VDC	12°/25°/40°/60°/12°45°
3x3.5W	OSRAM	RGBW 4in 1	IK08	310lm	12/24 VDC	12°/25°/40°/60°/12°45°




AIG2173R

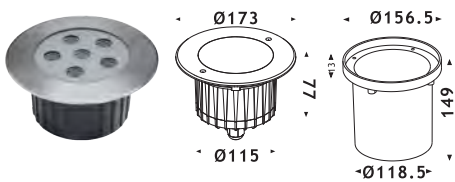


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W	CREE/OSRAM	Single	IK08	1080lm	12/24 VDC/220-240VAC	10°/25°/30°/45°/20° 25°
6x2.5W	OSRAM	RGB 3in 1	IK08	620lm	12/24 VDC	12°/25°/30°/45°/20° 25°




AIG2173S

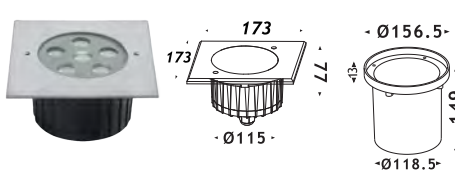


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W	CREE/OSRAM	Single	IK08	1080lm	12/24 VDC/220-240VAC	10°/25°/30°/45°/20° 25°
6x2.5W	OSRAM	RGB 3in 1	IK08	620lm	12/24 VDC	12°/25°/30°/45°/20° 25°
9x1.5W	OSRAM	Single	IK08	1440lm	240V/120V	25°/40°/60°/80°/10°45°/25°45°
9x1.5W	OSRAM	RGB	IK08	1440lm	240V/120V	25°/40°/60°/80°/10°45°/25°45°
9x2.5W	OSRAM	RGB 3in 1	IK08	690lm	12/24 VDC	25°/40°/60°/80°/10°45°/25°45°




AIG2186R

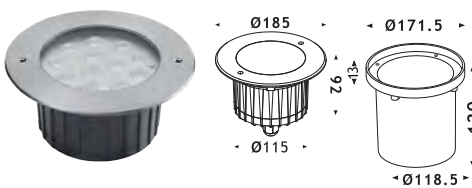

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x2W	CREE/OSRAM	Single	IK08	530lm	12/24 VDC/220-240VAC	10°/25°/40°/60°/10°45°/25°45°
18x1.5W	CREE/OSRAM	RGB 3in 1	IK08	530lm	12/24 VDC/220-240VAC	12°/25°/40°/60°/10°45°/25°45°
12x2.5W	OSRAM	Single	IK08	210lm	240V/120V	12°/25°/40°/60°/12°45°
12x3.5W	OSRAM	RGB	IK08	1680lm	240V/120V	12°/25°/40°/60°/12°45°
18x1.5W	OSRAM	RGB	IK08	2100lm	12/24 VDC/220-240VAC	25°/40°/60°/80°/10°45°/25°45°
18x1.5W	OSRAM	RGB 3in 1	IK08	1500lm	12/24 VDC	25°/40°/60°/80°/10°45°/25°45°



AIG2186S

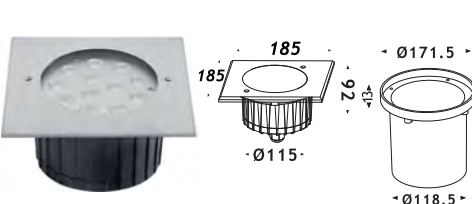

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x2W	CREE/OSRAM	Single	IK08	530lm	12/24 VDC/220-240VAC	10°/25°/40°/60°/10°45°/25°60°
12x2.5W	OSRAM	RGB 3in 1	IK08	210lm	12/24 VDC	12°/25°/40°/60°/12°45°
12x3.5W	OSRAM	RGBW 4in 1	IK08	310lm	12/24 VDC	12°/25°/40°/60°/12°45°






LED Inground Light

CE ErP IP67 RoHS 1-10V Triac PWM DALI 12V RGB RGBW


AIG2055R8




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x2W	CREE/OSRAM	Single	IK08	20lm	12/24 VDC/220-240VAC	360°
1x3W	CREE/OSRAM	RGB 3in 1	IK08	20lm	12/24 VDC	360°
1x4W	CREE/OSRAM	RGBW 4in 1	IK08	20lm	12/24 VDC	360°




AIG2097R

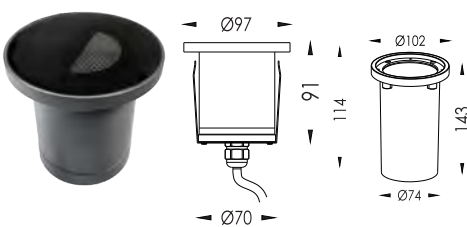


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x6W	CREE COB	Single	IK08	510lm	12/24 VDC/220-240VAC	15°/24°/36°/60°/120°
3x2W	OSRAM/CREE	Single	IK08	390lm	12/24 VDC/220-240VAC	15°/20°/25°/40°/60°




AIG2055R5

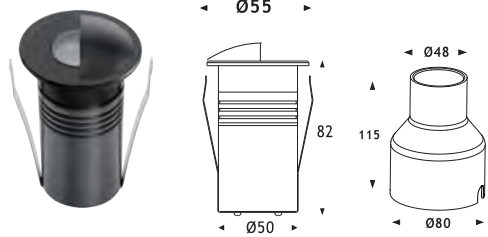

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x2W	CREE/OSRAM	Single	IK08	120lm	12/24 VDC/220-240VAC	8°/12°/25°/40°/60°/10°/45°/25°/45°
1x3W	CREE/OSRAM	RGB 3in 1	IK08	50lm	12/24 VDC	12°/25°/40°/60°/10°/45°/25°/45°
1x4W	CREE/OSRAM	RGBW 4in 1	IK08	60lm	12/24 VDC	12°/25°/40°/60°/10°/45°/25°/45°




AIG2097R

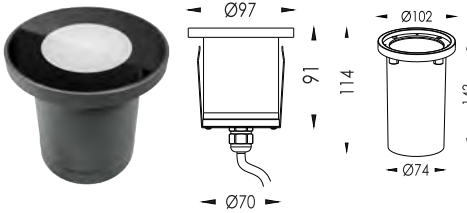


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x6W	CREE COB	Single	IK08	510lm	12/24 VDC/220-240VAC	15°/24°/36°/60°/120°
3x2W	OSRAM/CREE	Single	IK08	290lm	12/24 VDC/220-240VAC	15°/20°/25°/40°/60°



AIG2070R5

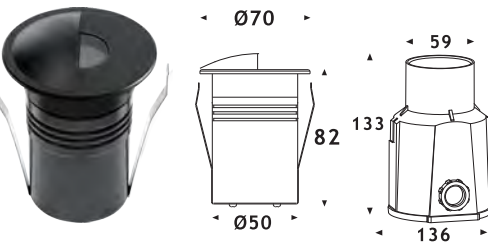


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x5W	CREE/OSRAM	Single	IK08	360lm	12/24 VDC/220-240VAC	8°/12°/25°/40°/60°/10°/45°/25°/45°
1x5W	CREE/OSRAM	RGB 3in 1	IK08	120lm	12/24 VDC	12°/25°/40°/60°/10°/45°/25°/45°
1x6W	CREE/OSRAM	RGBW 4in 1	IK08	170lm	12/24 VDC	12°/25°/40°/60°/10°/45°/25°/45°




Slim Type LED Inground Light

CE ErP IP67 RoHS 1-10V Triac PWM DALI 12V RGB RGBW


AIG2050R

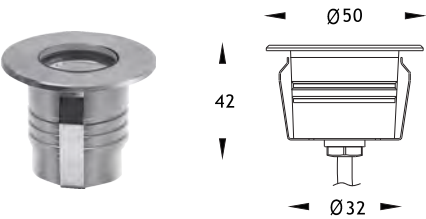


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x1.5W	CREE/OSRAM	Single	IK08	80lm	12/24 VDC	10°/25°/45°/60°




AIG2050S

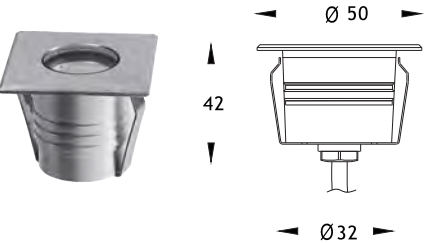


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x1.5W	CREE/OSRAM	Single	IK08	80lm	12/24 VDC	10°/25°/45°/60°




AIG2058R

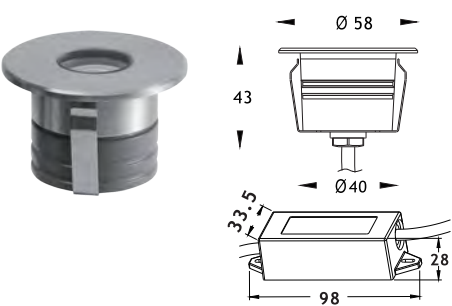


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x1.5W	CREE/OSRAM	Single	IK09	110lm	12/24 VDC/220-240VAC	10°/25°/45°/60°
1x2W	OSRAM	RGB 3in 1	IK09	70lm	12/24 VDC	10°/25°/45°/60°




AIG2058S

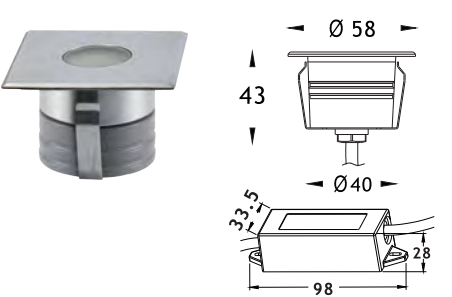

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x1.5W	CREE/OSRAM	Single	IK09	110lm	12/24 VDC/220-240VAC	10°/25°/45°/60°
1x2W	OSRAM	RGB 3in 1	IK09	70lm	12/24 VDC	12°/25°/45°/60°




AIG2116R2B

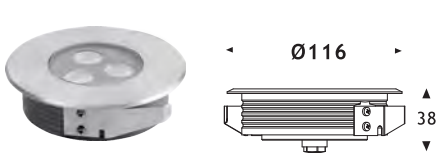

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x2W	CREE/OSRAM	Single	IK09	520lm	12/24 VDC/220-240VAC	5°/10°/25°/40°/60°
3x2.5W	OSRAM	RGB 3in 1	IK09	210lm	12/24 VDC	10°/25°/40°/60°




AIG2116S2B

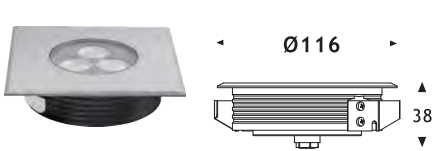

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x2W	CREE/OSRAM	Single	IK09	520lm	12/24 VDC/220-240VAC	10°/25°/40°/60°
3x2.5W	OSRAM	RGB 3in 1	IK09	210lm	12/24 VDC	12°/25°/40°/60°




AIG2173R2B

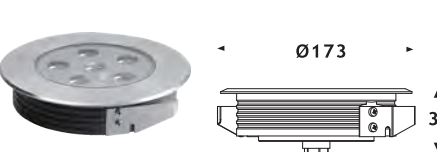

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W	OSRAM/CREE	Single	IK09	420lm	12/24 VDC/220-240VAC	10°/25°/40°/60°
6x2.5W	OSRAM	RGB 3in 1	IK09	450lm	12/24 VDC	12°/25°/40°/60°
6x3.5W	OSRAM	RGBW 4in 1	IK09	630lm	12/24 VDC	12°/25°/40°/60°



AIG2173S2B

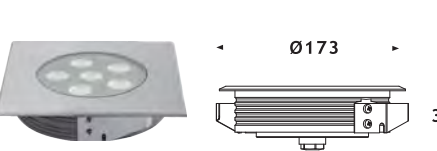

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W	OSRAM/CREE	Single	IK09	420lm	12/24 VDC/220-240VAC	10°/25°/40°/60°
6x2.5W	OSRAM	RGB 3in 1	IK09	450lm	12/24 VDC	12°/25°/40°/60°
6x3.5W	OSRAM	RGBW 4in 1	IK09	630lm	12/24 VDC	12°/25°/40°/60°






LED Inground Side Light


CE ErP IP67 RoHS 1-10V Triac PWM DALI 512 RGB RGBW

AIG2055R7-1 WAY/2 WAY/4 WAY

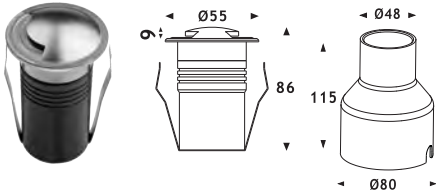


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x2W	CREE/OSRAM	Single	IK09	15lm	12/24 VDC/220-240VAC	1 WAY/2 WAY/4 WAY
1x2W	OSRAM	RGB 3in 1	IK09	10lm	12/24 VDC	1 WAY/2 WAY/4 WAY

AIG2070R7-1 WAY/2 WAY

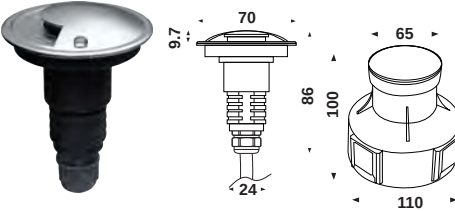


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x2W	CREE/OSRAM	Single	IK10	15lm	12/24 VDC/220-240VAC	1 WAY/2 WAY/4 WAY
1x2W	OSRAM	RGB 3in 1	IK10	10lm	12/24 VDC	1 WAY/2 WAY/4 WAY

AIG2116R7-1 WAY/2 WAY/4 WAY

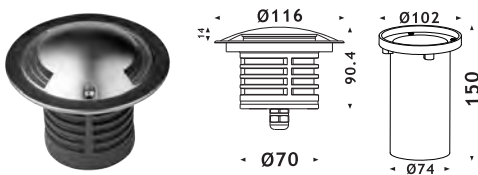


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3-6W	OSRAM	Single	IK10	--	12/24 VDC/220-240VAC	1 WAY/2 WAY/4 WAY
3-6W	OSRAM	RGB 3in 1	IK10	--	12/24 VDC	1 WAY/2 WAY/4 WAY
2x2W	OSRAM	Single	IK10	--	12/24 VDC/220-240VAC	20°/40°/60°

AIG2173R7-1 WAY/2 WAY/4 WAY

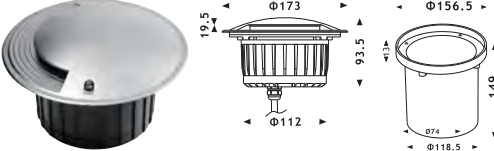


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6-12W	OSRAM	Single	IK10	--	12/24 VDC/220-240VAC	1 WAY/2 WAY/4 WAY
6-12W	OSRAM	RGB 3in 1	IK10	--	12/24 VDC	1 WAY/2 WAY/4 WAY
6-12W	OSRAM	Single	IK10	--	12/24 VDC/220-240VAC	20°/40°/60°

AIG2116R7-1 WAY/2 WAY/4 WAY

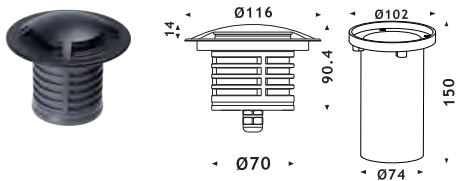


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3-6W	OSRAM	Single	IK09	--	12/24 VDC/220-240VAC	1 WAY/2 WAY
3-6W	OSRAM	RGB 3in 1	IK09	--	12/24 VDC	1 WAY/2 WAY
2x2W	OSRAM	Single	IK09	--	12/24 VDC/220-240VAC	20°/40°/60°

AIG2116R7-1 WAY/2 WAY/4 WAY

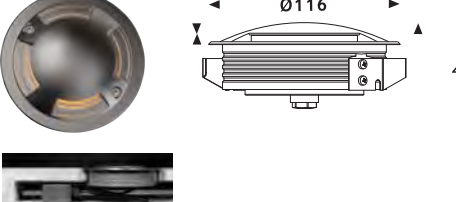

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6W	OSRAM	Single	IK09	50lm	12/24 VDC/220-240VAC	1 WAY/2 WAY/4 WAY
6W	OSRAM	RGB 3in 1	IK09	30lm	12/24 VDC	1 WAY/2 WAY/4 WAY

AIG2173R7-1 WAY/2 WAY/4 WAY

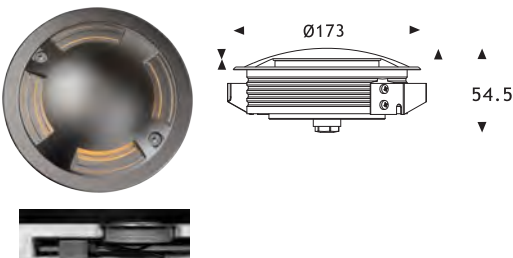

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12W	OSRAM	Single	IK09	100lm	12/24 VDC/220-240VAC	1 WAY/2 WAY/4 WAY
12W	OSRAM	RGB 3in 1	IK09	70lm	12/24 VDC	1 WAY/2 WAY/4 WAY

LED Linear Inground Light

Range of linear In-Ground walk over luminaires are developed for elegant grazing light effect. These luminaires perfectly suits for building facades, pathways & wall grazing.





Uplights

	Symmetrical Lens	
		8°, 10°, 15°
		25°, 40°, 60°

Wallwasher Light


		Asymmetrical Lens
		10° 60°, 20° 40° 20° 45°, 20° 60°

Wallwasher Light

		Asymmetrical Lens
		45° 35°





LED Linear Inground Light

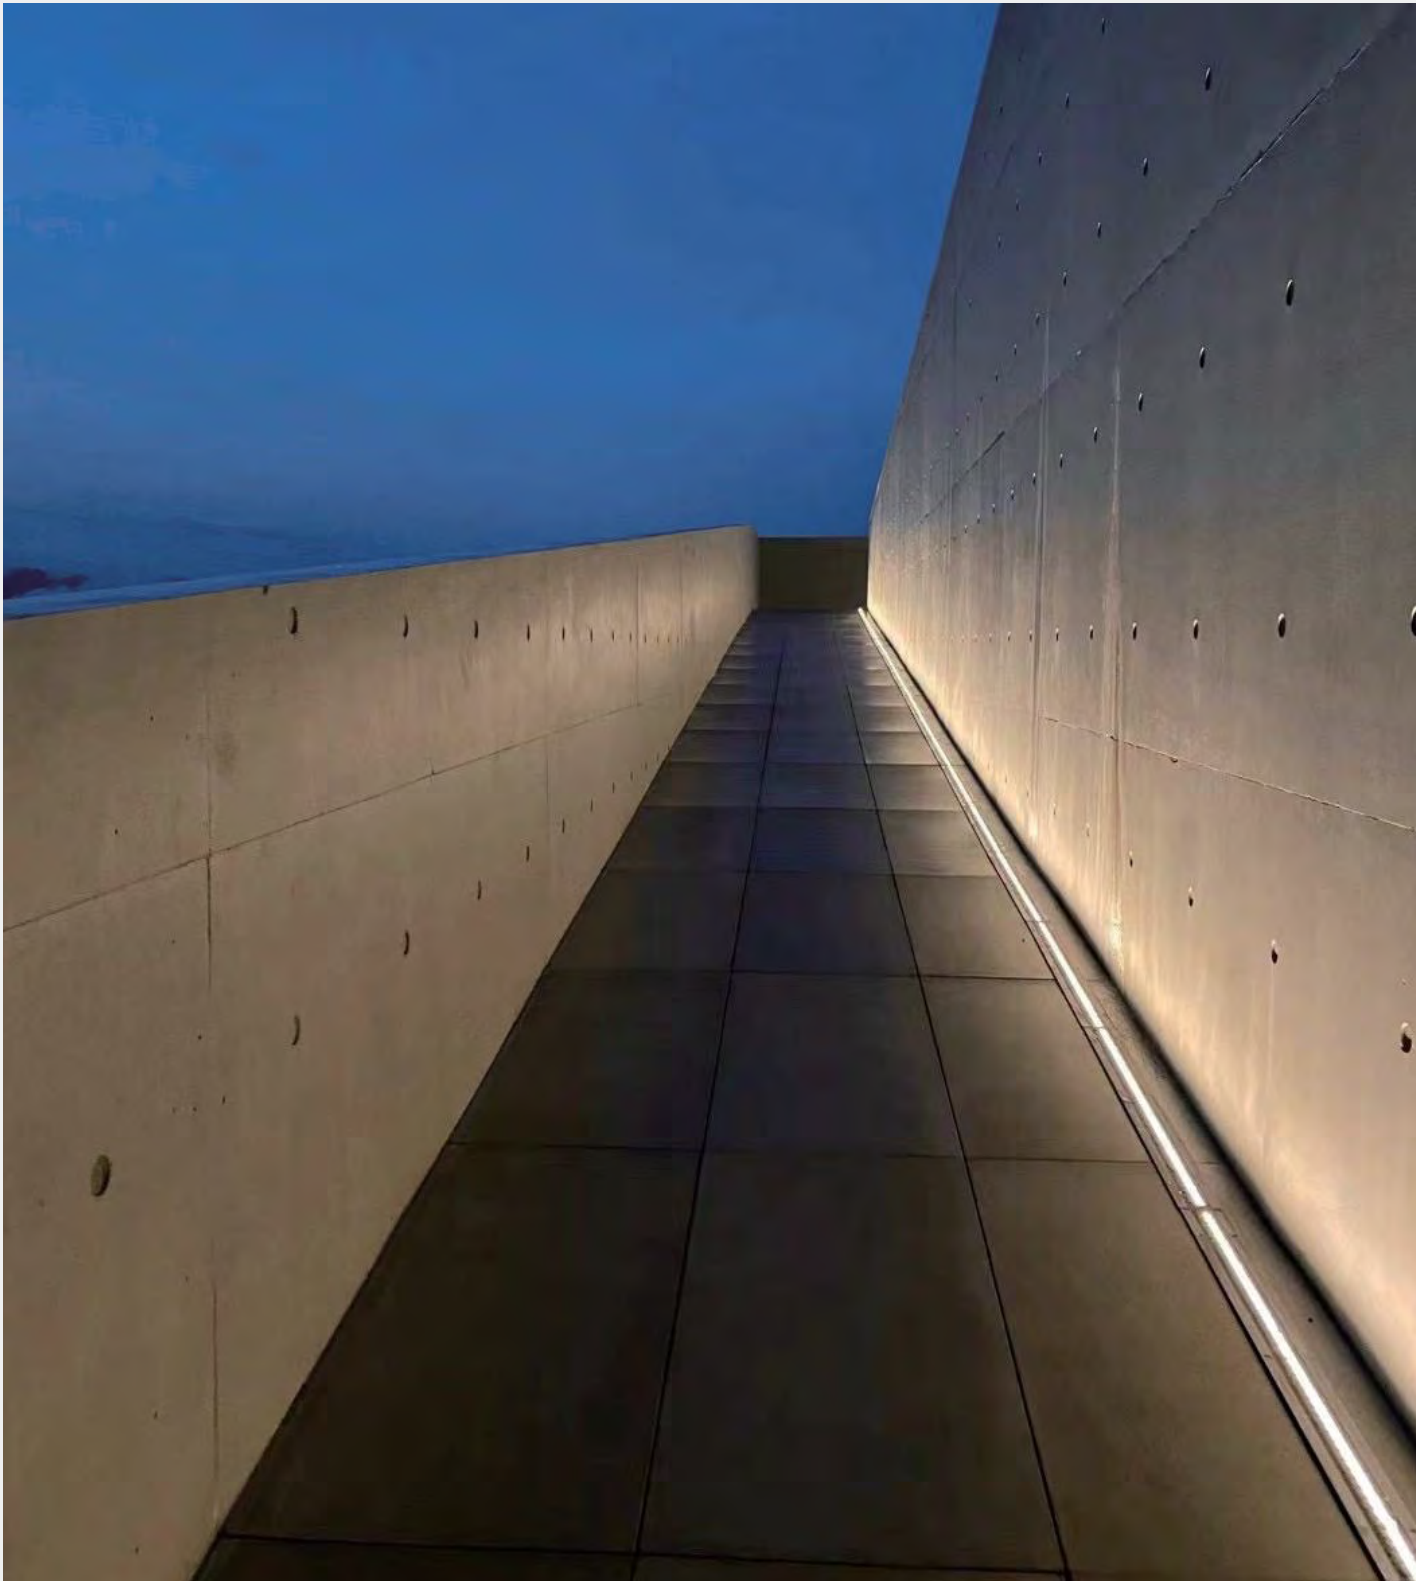

LED Linear Inground Light

Minimalist design and shallow recessing depth allow for discrete installation in narrow places.

Available in three sizes and different color temperatures.

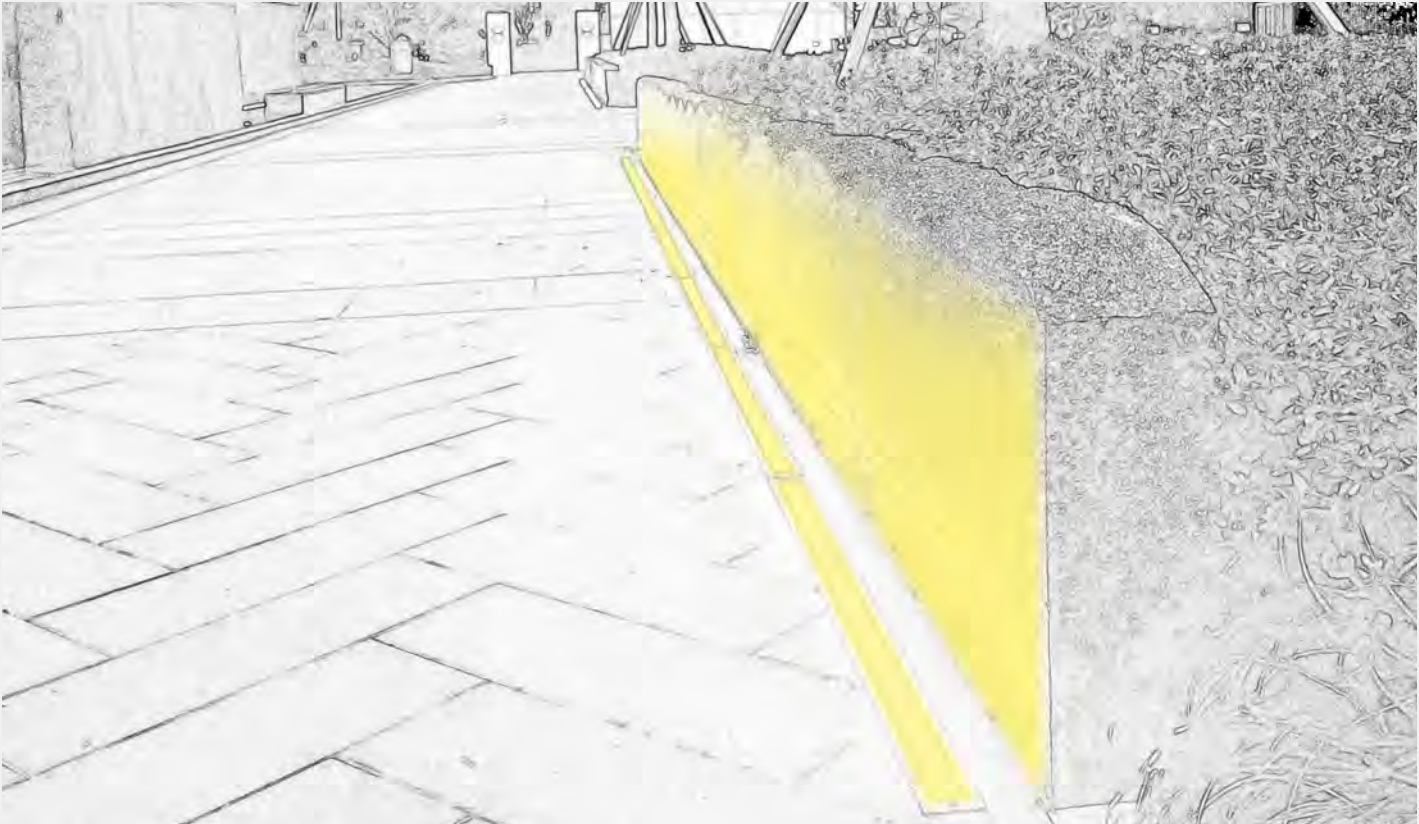

Material Quality
12# Die-casting powder coated aluminum housing
Titanium chrome white SUS 316L front cover
Tempered glass.

Luminaire housing and recessed housing made of aluminium, Front-cover 316L stainless steel, safety glass, white or clear.



LED
CREE/OSRAM/BRIDGELUX, CRI>80(CRI>90 on request)
Cable 0.5m
ABS Mounting sleeve




Quality/Supporting
IP67 IK10
Life time ≥50000 hrs
Operating temperature -20 C ~40 C




LED Linear Inground Light

CE ERP IP67 RoHS 1-10V Triac PWM DALI 12V RGB RGBW


AIG2063L2-0.195M

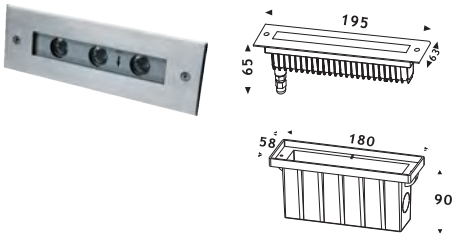


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x2W	OSRAM	Single	IK08	530lm	12/24 VDC/220-240VAC	8°/12°/25°/40°/60°
3x2.5W	OSRAM	RGB 3in 1	IK08	210lm	12/24 VDC	12°/25°/40°/60°
3x3.5W	OSRAM	RGBW 4in 1	IK08	310lm	12/24 VDC	12°/25°/40°/60°




AIG2063L2-0.328M

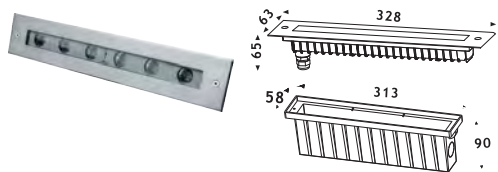

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W	OSRAM	Single	IK08	960lm	12/24 VDC/220-240VAC	12°/25°/40°/60°
6x2.5W	OSRAM	RGB 3in 1	IK08	435lm	12/24 VDC	12°/25°/40°/60°
6x3.5W	OSRAM	RGBW 4in 1	IK08	600lm	12/24 VDC	12°/25°/40°/60°




AIG2063L4-0.195M

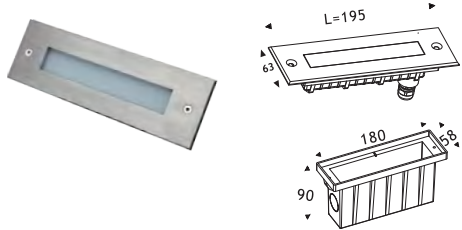

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
2.2W	OSRAM	Single	IK08	25lm	12/24 VDC/220-240VAC	120°
2.2W	OSRAM	RGB 3in 1	IK08	25lm	12/24 VDC	120°




AIG2063L4-0.328M

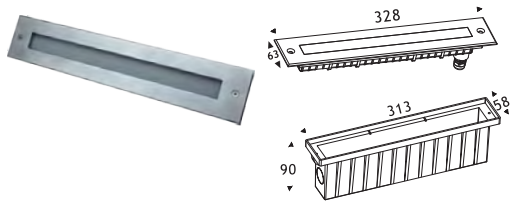


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3-6W	OSRAM	Single	IK08	--	12/24 VDC/220-240VAC	120°
3-6W	OSRAM	RGB 3in 1	IK08	--	12/24 VDC	120°




AIG2064L2-0.302M

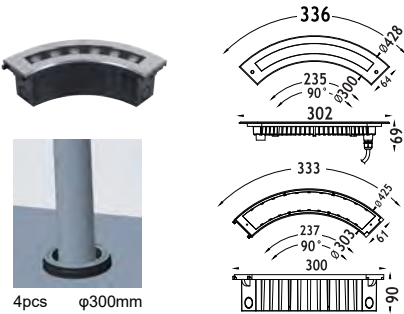


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W	OSRAM	Single	IK08	960lm	12/24 VDC/220-240VAC	8°/12°/25°/40°/60°
6x2.5W	OSRAM	RGB 3in 1	IK08	435lm	12/24 VDC	12°/25°/40°/60°
6x3.5W	OSRAM	RGBW 4in 1	IK08	600lm	12/24 VDC	12°/25°/40°/60°



AIG2064L2-0.369M

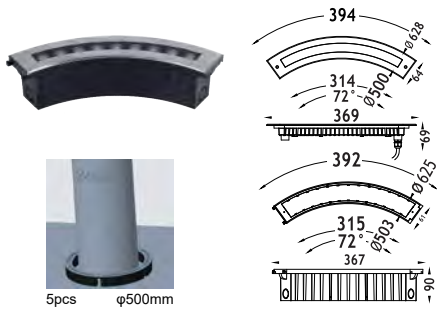

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
9x2W	OSRAM	Single	IK08	1380lm	12/24 VDC/220-240VAC	8°/12°/25°/40°/60°
9x2.5W	OSRAM	RGB 3in 1	IK08	660lm	12/24 VDC	12°/25°/40°/60°
9x3.5W	OSRAM	RGBW 4in 1	IK08	928lm	12/24 VDC	12°/25°/40°/60°







LED Linear Inground Light




AIG2055L2-0.275M/0.5M/1M

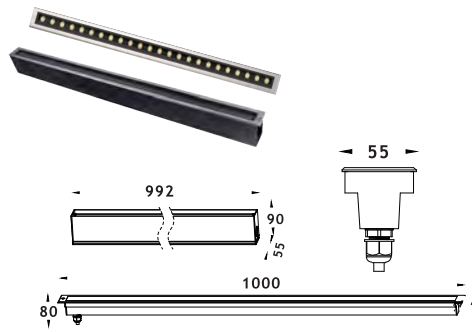


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W(0.275M)	OSRAM	Single	IK10	700lm	12/24 VDC/220-240VAC	15°/20°/30°/45°/60°/10°30°/10°45°/15°45°/10°60°
12x2W(0.5M)	OSRAM	Single	IK10	1390lm	12/24 VDC/220-240VAC	15°/20°/30°/45°/60°/10°30°/10°45°/15°45°/10°60°
24x2W(1M)	OSRAM	Single	IK10	2780lm	12/24 VDC/220-240VAC	15°/20°/30°/45°/60°/10°30°/10°45°/15°45°/10°60°
24x2.5W(1M)	OSRAM	RGB 3in 1	IK10	2780lm	12/24 VDC	15°/20°/30°/45°/60°/10°30°/10°45°/15°45°/10°60°
24x3.5W(1M)	OSRAM	RGBW 4in 1	IK10	2780lm	12/24 VDC	15°/20°/30°/45°/60°/10°30°/10°45°/15°45°/10°60°




AIG2072L-0.3M/0.5M/1M

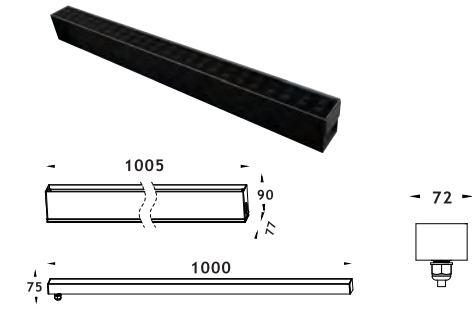


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x1.5W(0.3M)	OSRAM	Single	IK10	700lm	12/24 VDC/220-240VAC	10°/20°/30°/45°/60°
24x1.5W(0.5M)	OSRAM	Single	IK10	1390lm	12/24 VDC/220-240VAC	10°/20°/30°/45°/60°
48x1.5W(1M)	OSRAM	Single	IK10	2780lm	12/24 VDC/220-240VAC	10°/20°/30°/45°/60°
48x2W(1M)	OSRAM	RGB 3in 1	IK10	2780lm	12/24 VDC	10°/20°/30°/45°/60°
48x3W(1M)	OSRAM	RGBW 4in 1	IK10	2780lm	12/24 VDC	10°/20°/30°/45°/60°




AIG2090L-0.3M/0.5M/1M

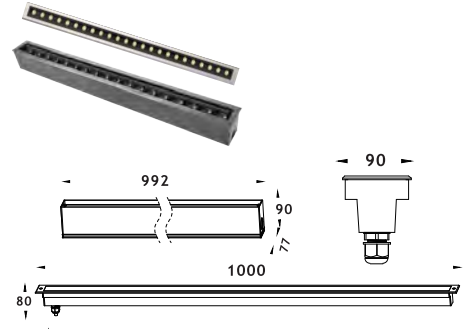

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W(0.3M)	OSRAM	Single	IK10	700lm	12/24 VDC/220-240VAC	15°/20°/30°/45°/60°/10°30°/10°45°/15°45°/10°60°
12x2W(0.5M)	OSRAM	Single	IK10	1390lm	12/24 VDC/220-240VAC	15°/20°/30°/45°/60°/10°30°/10°45°/15°45°/10°60°
24x2W(1M)	OSRAM	Single	IK10	2780lm	12/24 VDC/220-240VAC	15°/20°/30°/45°/60°/10°30°/10°45°/15°45°/10°60°
24x2.5W(1M)	OSRAM	RGB 3in 1	IK10	2780lm	12/24 VDC	15°/20°/30°/45°/60°/10°30°/10°45°/15°45°/10°60°
24x3.5W(1M)	OSRAM	RGBW 4in 1	IK10	2780lm	12/24 VDC	15°/20°/30°/45°/60°/10°30°/10°45°/15°45°/10°60°




AIG2050L-0.275M/0.5M/1M

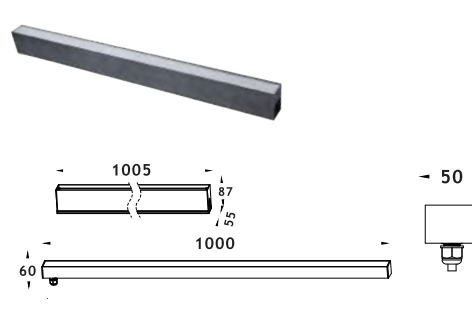


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
9W(0.275M)	OSRAM	Single	IK10	--	12/24 VDC/220-240VAC	120°
18W(0.5M)	OSRAM	Single	IK10	2780lm	12/24 VDC/220-240VAC	120°
35W(1M)	OSRAM	Single	IK10	2780lm	12/24 VDC/220-240VAC	120°




A2032L-0.275M/0.5M/1M

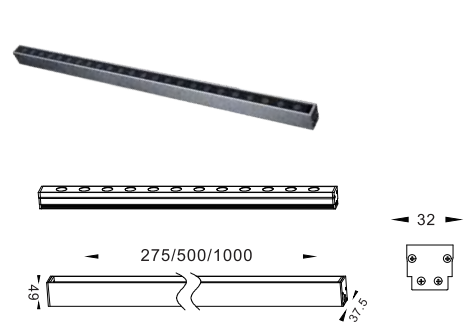

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x1.5W(0.275M)	OSRAM	Single	IK08	610lm	12/24 VDC	15°/20°/30°/45°/60°/10°30°/10°45°/15°45°/10°60°
12x1.5W(0.5M)	OSRAM	Single	IK08	1220lm	12/24 VDC	15°/20°/30°/45°/60°/10°30°/10°45°/15°45°/10°60°
24x1.5W(1M)	OSRAM	Single	IK08	2450lm	12/24 VDC	15°/20°/30°/45°/60°/10°30°/10°45°/15°45°/10°60°




AIG2020L

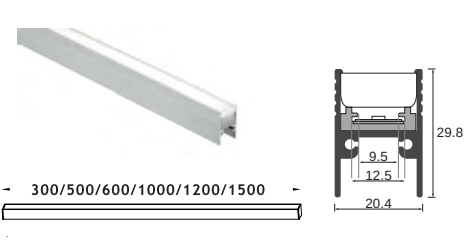


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3W(0.3M)	SMD	Single	IK10	222lm	24 VDC	120°
5W(0.5M)	SMD	Single	IK10	542lm	24 VDC	120°
10W(1M)	SMD	Single	IK10	1084lm	24 VDC	120°




AIG2050L-0.275M/0.5M/1M

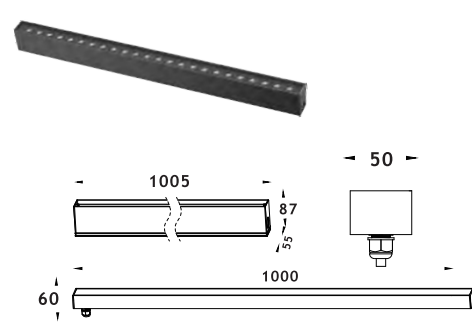

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W(0.275M)	OSRAM	Single	IK10	700lm	12/24 VDC/220-240VAC	15°/20°/30°/45°/60°/10°30°/10°45°/15°45°/10°60°
12x2W(0.5M)	OSRAM	Single	IK10	1390lm	12/24 VDC/220-240VAC	15°/20°/30°/45°/60°/10°30°/10°45°/15°45°/10°60°
24x2W(1M)	OSRAM	Single	IK10	2780lm	12/24 VDC/220-240VAC	15°/20°/30°/45°/60°/10°30°/10°45°/15°45°/10°60°
24x2.5W(1M)	OSRAM	RGB 3in 1	IK10	2780lm	12/24 VDC	15°/20°/30°/45°/60°/10°30°/10°45°/15°45°/10°60°
24x3.5W(1M)	OSRAM	RGBW 4in 1	IK10	2780lm	12/24 VDC	15°/20°/30°/45°/60°/10°30°/10°45°/15°45°/10°60°



AIG2030L

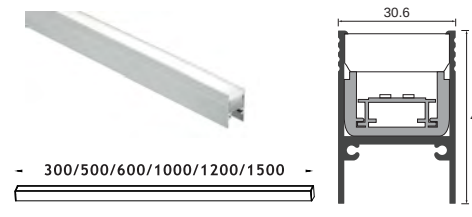

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6W(0.3M)	SMD	Single	IK10	325lm	12/24 VDC	120°
10W(0.5M)	SMD	Single	IK10	542lm	12/24 VDC	120°
20W(1M)	SMD	Single	IK10	1084lm	12/24 VDC	120°



LED Spot Light


Spot luminaires stands out for special housing design and high quality optical components specifically for demanding visual tasks to provide enhanced visual comfort.

Housing made of 12# Die-casting aluminum with Akzo power coated Clear tempered safety glass, transmittance of light is over 95% and the accuracy of color temperature as well as strong impact resistance bearing capacity. Quick & simple installation with low maintenance.








Uplights

		Narrow Spot
		Spot
		Flood

Floodlight

		Wide Flood
		Extra Wide Flood
		Oval Flood

Lens Wallwashers

		Wallwash
---	---	----------

LED Spot Light

Our Spot light series with exemplary design and compact dimensions. With precise optics they are used for accent lighting on façades or to illuminate objects from a long distance.

The spot light are available in 4 different sizes and wattages. There is a choice of different optics – collimators, wide beam reflectors or an optic for uniform illumination of streets and pathways.



Workmanship:

Akzo powder coat
finish as standard:
White, Black, Grey;

Customized:

Silver, Golden, Bronze, etc.

**Variable Focusing Beam Angle Available
From 15° to 60°**

Zoomable focus lighting fixtures are equipped with adjustable focusing lenses or zoom systems, enabling users to change the focus of the beam. By rotating or adjusting specific parts of the fixture, a smooth transition can be achieved from a focused beam to a wider floodlight, catering to diverse lighting requirements.






Spot light series

Sturdy construction in order to maintain performance of the luminaire and to reduce maintenance costs.

Applicable for outdoor installation, hotel, villa, facade, garden, redidential.



Material Quality
12# Die-casting powder coated aluminum housing
Tempered glass

Comes with arich range of useful accessories both to solve different types of installation and to control glare.



LED
CREE/OSRAM/BRIDGELUX, CRI>80(CRI>90 on request)
Cable 0.5m




Quality/Supporting
P66 IK08
Life time ≥50000 hrs
Operating temperature -20℃~40℃
Spike/Base plate/Pole/Hood/Tree strap


Zoomable LED Landscape Spot Light

CE ErP IP66 RoHS 1-10V Triac PWM DALI DMX RGB RGBW


ASP3060R

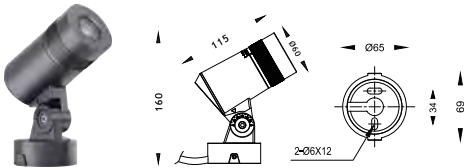


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x6W	CREE COB	Single	IK05	380lm	12/24 VDC/220-240VAC	15-60°




ASP3060R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x6W	CREE COB	Single	IK05	380lm	12/24 VDC/220-240VAC	15-60°




ASP3080R

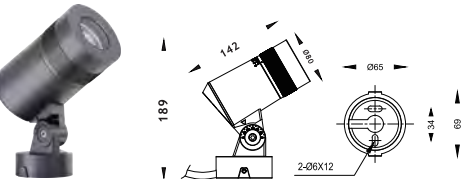


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x12W	CREE COB	Single	IK05	940lm	12/24 VDC/220-240VAC	15-60°




ASP3080R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x12W	CREE COB	Single	IK05	940lm	12/24 VDC/220-240VAC	15-60°




ASP3100R

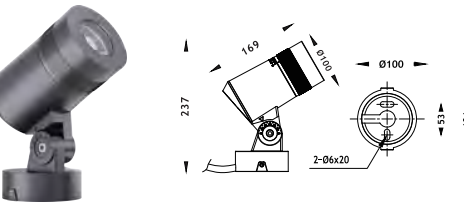


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x20W	CREE COB	Single	IK05	1420lm	12/24 VDC/220-240VAC	15-60°




ASP3100R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x20W	CREE COB	Single	IK05	1420lm	12/24 VDC/220-240VAC	15-60°




ASP3150R

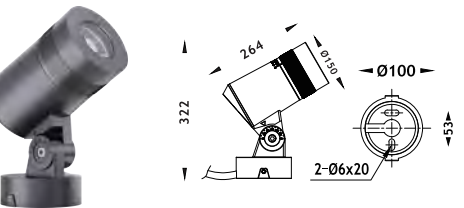


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x40W	CREE COB	Single	IK05	2500lm	24 VDC/220-240VAC	15-60°



ASP3150R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x40W	CREE COB	Single	IK05	2500lm	12/24 VDC/220-240VAC	15-60°




Zoomable LED Landscape Spot Light

CE ErP IP66 RoHS 1-10V Triac PWM DALI 0-10V RGB RGBW


ASP3060R



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x6W	CREE COB	Single	IK05	380lm	12/24 VDC/220-240VAC	15-60°




ASP3080R



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x12W	CREE COB	Single	IK05	940lm	24 VDC/220-240VAC	15-60°




ASP3100R

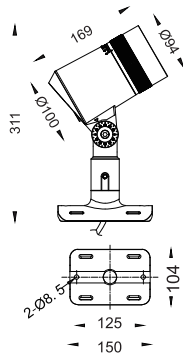

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x20W	CREE	Single	IK05	1420lm	24 VDC/220-240VAC	15-60°



ASP3150R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x40W	CREE	Single	IK05	2500lm	24 VDC/220-240VAC	15-60°



Zoomable LED Landscape Spot Light

CE ENEC IP66 RoHS 1-10V Triac PWM DALI DMX RGB RGBW

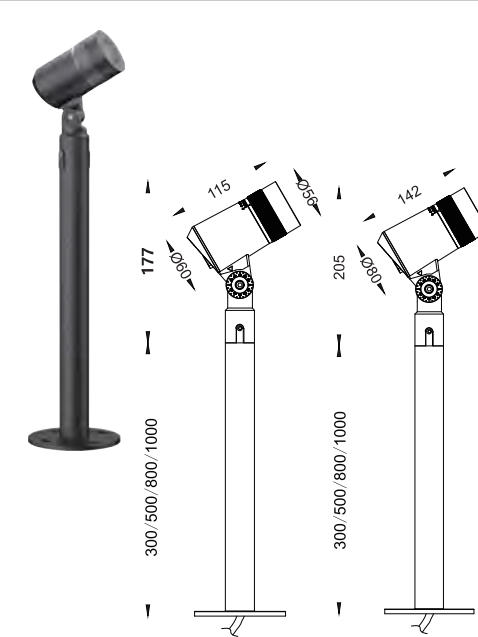


Technical drawings of the ASP3060R and ASP3080R1*b-B3-M2 spotlights. The ASP3060R has a height of 177mm and a beam diameter of Ø90mm. The ASP3080R1*b-B3-M2 has a height of 205mm and a beam diameter of Ø90mm. Both lights have a mounting arm length of 300/500/800/1000mm.

ASP3060R

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x6W	CREE COB	Single	IK05	380lm	12/24 VDC/220-240VAC	15-60°

ASP3080R1*b-B3-M2

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x12W	CREE COB	Single	IK05	940lm	24 VDC/220-240VAC	15-60°

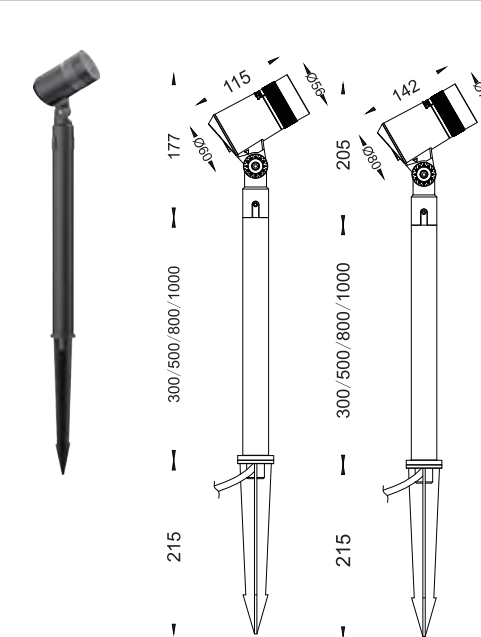


Technical drawings of the ASP3060R and ASP3080R spotlights. The ASP3060R has a height of 177mm and a beam diameter of Ø90mm. The ASP3080R has a height of 205mm and a beam diameter of Ø90mm. Both lights have a mounting arm length of 300/500/800/1000mm.

ASP3060R

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x6W	CREE COB	Single	IK05	380lm	12/24 VDC/220-240VAC	15-60°

ASP3080R

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x12W	CREE COB	Single	IK05	940lm	24 VDC/220-240VAC	15-60°

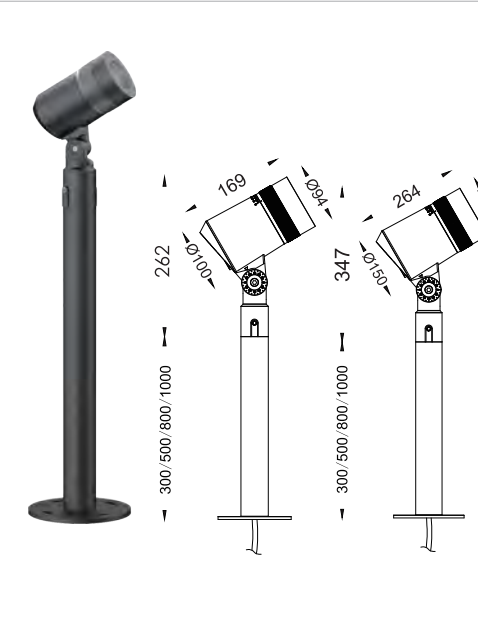


Technical drawings of the ASP3100R and ASP3150R1*b-B3-M2 spotlights. The ASP3100R has a height of 262mm and a beam diameter of Ø100mm. The ASP3150R1*b-B3-M2 has a height of 347mm and a beam diameter of Ø150mm. Both lights have a mounting arm length of 300/500/800/1000mm.

ASP3100R

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x18W	CREE COB	Single	IK05	1420lm	24 VDC/220-240VAC	15-60°

ASP3150R1*b-B3-M2

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x40W	CREE COB	Single	IK05	2500lm	24 VDC/220-240VAC	15-60°

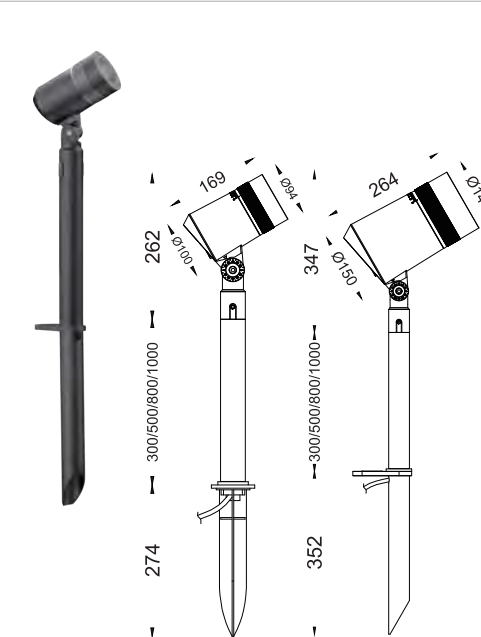

Technical drawings of the ASP3100R and ASP3150R spotlights. The ASP3100R has a height of 262mm and a beam diameter of Ø100mm. The ASP3150R has a height of 347mm and a beam diameter of Ø150mm. Both lights have a mounting arm length of 300/500/800/1000mm.

ASP3100R

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x18W	CREE COB	Single	IK05	1420lm	24 VDC/220-240VAC	15-60°

ASP3150R


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x40W	CREE COB	Single	IK05	2500lm	24 VDC/220-240VAC	15-60°




LED Landscape Spot Light -- Series LP




ASP3060R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x5W	CREE	Single	IK05	350lm	12/24 VDC/220-240VAC	3°/8°
3x2W	OSRAM/CREE	Single	IK05	330lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x6W	CREE COB	Single	IK05	600lm	12/24 VDC/220-240VAC	18°/24°/38°/60°
3x3W	OSRAM	RGB 3in 1	IK05	128lm	12/24 VDC	25°/40°/60°
3x4W	OSRAM	RGBW 4in 1	IK05	168lm	12/24 VDC	25°/40°/60°




ASP3080R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x10W	CREE	Single	IK05	750lm	12/24 VDC/220-240VAC	3°/8°
4x3W	OSRAM/CREE	Single	IK05	780lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x13W	CREE COB	Single	IK05	1310lm	24 VDC/220-240VAC	18°/24°/38°/60°
4x3W	OSRAM	RGB 3in 1	IK05	168lm	12/24 VDC/220-240VAC	25°/40°/60°
4x3.5W	OSRAM	RGBW 4in 1	IK05	224lm	12/24 VDC/220-240VAC	25°/40°/60°




ASP3100R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x5W	CREE	Single	IK05	1140lm	12/24 VDC/220-240VAC	3°/8°
6x3W	OSRAM/CREE	Single	IK05	1200lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x20W	CREE COB	Single	IK05	2200lm	24 VDC/220-240VAC	18°/24°/38°/60°
6x2.5W	OSRAM	RGB 3in 1	IK05	360lm	12/24 VDC/220-240VAC	25°/40°/60°
6x3.5W	OSRAM	RGBW 4in 1	IK05	480lm	12/24 VDC/220-240VAC	25°/40°/60°




ASP3150R



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x7W	CREE	Single	IK05	2520lm	12/24 VDC/220-240VAC	3°/8°
12x3.5W	OSRAM/CREE	Single	IK05	2520lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x40W	CREE COB	Single	IK05	3800lm	24 VDC/220-240VAC	18°/24°/38°/60°
12x2.5W	OSRAM	RGB 3in 1	IK05	660lm	12/24 VDC/220-240VAC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in 1	IK05	990lm	12/24 VDC/220-240VAC	25°/40°/60°




ASP3060R



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x5W	CREE	Single	IK05	350lm	12/24 VDC/220-240VAC	3°/8°
3x2W	OSRAM/CREE	Single	IK05	330lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x6W	CREE COB	Single	IK05	600lm	12/24 VDC/220-240VAC	18°/24°/38°/60°
3x3W	OSRAM	RGB 3in 1	IK05	128lm	12/24 VDC	25°/40°/60°
3x4W	OSRAM	RGBW 4in 1	IK05	168lm	12/24 VDC	25°/40°/60°




ASP3080R



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x10W	CREE	Single	IK05	750lm	12/24 VDC/220-240VAC	3°/8°
4x3W	OSRAM/CREE	Single	IK05	780lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x13W	CREE COB	Single	IK05	1310lm	24 VDC/220-240VAC	18°/24°/38°/60°
4x3W	OSRAM	RGB 3in 1	IK05	168lm	12/24 VDC/220-240VAC	25°/40°/60°
4x3.5W	OSRAM	RGBW 4in 1	IK05	224lm	12/24 VDC/220-240VAC	25°/40°/60°




ASP3100R



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x5W	CREE	Single	IK05	1140lm	12/24 VDC/220-240VAC	3°/8°
6x3W	OSRAM/CREE	Single	IK05	1200lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x20W	CREE COB	Single	IK05	2200lm	24 VDC/220-240VAC	18°/24°/38°/60°
6x2.5W	OSRAM	RGB 3in 1	IK05	360lm	12/24 VDC/220-240VAC	25°/40°/60°
6x3.5W	OSRAM	RGBW 4in 1	IK05	480lm	12/24 VDC/220-240VAC	25°/40°/60°



ASP3150R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x7W	CREE	Single	IK05	2520lm	12/24 VDC/220-240VAC	3°/8°
12x3.5W	OSRAM/CREE	Single	IK05	2520lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x40W	CREE COB	Single	IK05	3800lm	24 VDC/220-240VAC	18°/24°/38°/60°
12x2.5W	OSRAM	RGB 3in 1	IK05	660lm	12/24 VDC/220-240VAC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in 1	IK05	990lm	12/24 VDC/220-240VAC	25°/40°/60°




LED Landscape Spot Light -- Series LP

CE ENEC IP66 RoHS 1-10V Triac PWM DALI DMX RGB RGBW


ASP3060R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x5W	CREE	Single	IK05	350lm	12/24 VDC/220-240VAC	3°/8°
3x2W	OSRAM/CREE	Single	IK05	330lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x6W	CREE COB	Single	IK05	600lm	12/24 VDC/220-240VAC	18°/24°/38°/60°
3x3W	OSRAM	RGB 3in 1	IK05	128lm	12/24 VDC	25°/40°/60°
3x4W	OSRAM	RGBW 4in 1	IK05	168lm	12/24 VDC	25°/40°/60°




ASP3080R



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x10W	CREE	Single	IK05	750lm	12/24 VDC/220-240VAC	3°/8°
4x3W	OSRAM/CREE	Single	IK05	780lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x13W	CREE COB	Single	IK05	1310lm	24 VDC/220-240VAC	18°/24°/38°/60°
4x3W	OSRAM	RGB 3in 1	IK05	168lm	12/24 VDC/220-240VAC	25°/40°/60°
4x3.5W	OSRAM	RGBW 4in 1	IK05	224lm	12/24 VDC/220-240VAC	25°/40°/60°




ASP3100R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x5W	CREE	Single	IK05	1140lm	12/24 VDC/220-240VAC	3°/8°
6x3W	OSRAM/CREE	Single	IK05	1200lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x20W	CREE COB	Single	IK05	2200lm	24 VDC/220-240VAC	18°/24°/38°/60°
6x2.5W	OSRAM	RGB 3in 1	IK05	360lm	12/24 VDC/220-240VAC	25°/40°/60°
6x3.5W	OSRAM	RGBW 4in 1	IK05	480lm	12/24 VDC/220-240VAC	25°/40°/60°




ASP3150R

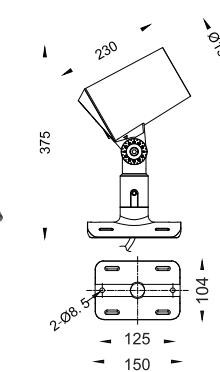


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x7W	CREE	Single	IK05	2520lm	12/24 VDC/220-240VAC	3°/8°
12x3.5W	OSRAM/CREE	Single	IK05	2520lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x40W	CREE COB	Single	IK05	3800lm	24 VDC/220-240VAC	18°/24°/38°/60°
12x2.5W	OSRAM	RGB 3in 1	IK05	660lm	12/24 VDC/220-240VAC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in 1	IK05	990lm	12/24 VDC/220-240VAC	25°/40°/60°




ASP3100R





Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x5W	CREE	Single	IK05	1140lm	12/24 VDC/220-240VAC	3°/8°
6x3W	OSRAM/CREE	Single	IK05	1200lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x20W	CREE COB	Single	IK05	2200lm	24 VDC/220-240VAC	18°/24°/38°/60°
6x2.5W	OSRAM	RGB 3in 1	IK05	360lm	12/24 VDC/220-240VAC	25°/40°/60°
6x3.5W	OSRAM	RGBW 4in 1	IK05	480lm	12/24 VDC/220-240VAC	25°/40°/60°




ASP3150R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x7W	CREE	Single	IK05	2520lm	12/24 VDC/220-240VAC	3°/8°
12x3.5W	OSRAM/CREE	Single	IK05	2520lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x40W	CREE COB	Single	IK05	3800lm	24 VDC/220-240VAC	18°/24°/38°/60°
12x2.5W	OSRAM	RGB 3in 1	IK05	660lm	12/24 VDC/220-240VAC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in 1	IK05	990lm	12/24 VDC/220-240VAC	25°/40°/60°




Ø114mm single




Ø108mm single




Ø89mm single

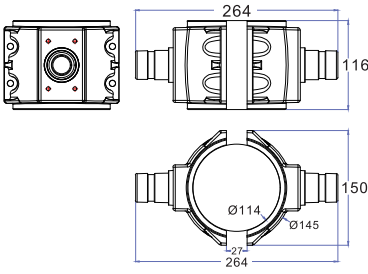

Ø114mm double

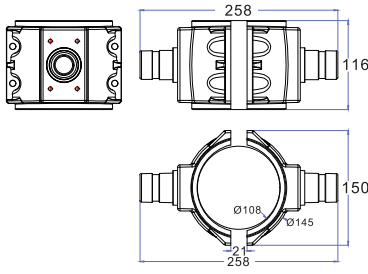

Ø108mm double

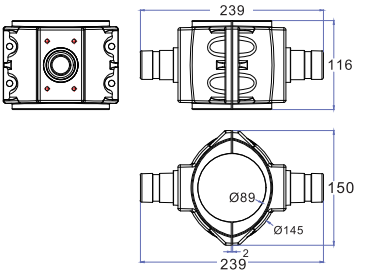

Ø89mm double

LED Landscape Spot Light -- Series LP

CE ENEC IP66 RoHS 1-10V Triac PWM DALI DMX RGB RGBW




ASP3060R

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x5W	CREE	Single	IK05	350lm	12/24 VDC/220-240VAC	3°/8°
3x2W	OSRAM/CREE	Single	IK05	330lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x6W	CREE COB	Single	IK05	600lm	12/24 VDC/220-240VAC	18°/24°/38°/60°
3x3W	OSRAM	RGB 3in 1	IK05	128lm	12/24 VDC	25°/40°/60°
3x4W	OSRAM	RGBW 4in 1	IK05	168lm	12/24 VDC	25°/40°/60°

ASP3080R

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x10W	CREE	Single	IK05	750lm	12/24 VDC/220-240VAC	3°/8°
4x3W	OSRAM/CREE	Single	IK05	780lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x13W	CREE COB	Single	IK05	1310lm	24 VDC/220-240VAC	18°/24°/38°/60°
4x3W	OSRAM	RGB 3in 1	IK05	168lm	12/24 VDC/220-240VAC	25°/40°/60°
4x3.5W	OSRAM	RGBW 4in 1	IK05	224lm	12/24 VDC/220-240VAC	25°/40°/60°

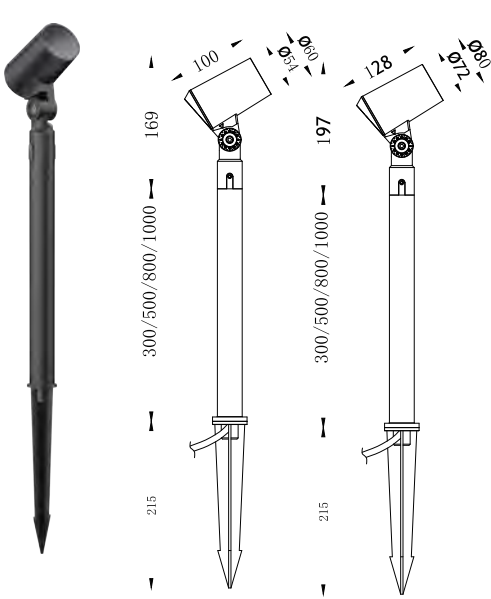


ASP3060R

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x5W	CREE	Single	IK05	350lm	12/24 VDC/220-240VAC	3°/8°
3x2W	OSRAM/CREE	Single	IK05	330lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x6W	CREE COB	Single	IK05	600lm	12/24 VDC/220-240VAC	18°/24°/38°/60°
3x3W	OSRAM	RGB 3in 1	IK05	128lm	12/24 VDC	25°/40°/60°
3x4W	OSRAM	RGBW 4in 1	IK05	168lm	12/24 VDC	25°/40°/60°

ASP3080R

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x10W	CREE	Single	IK05	750lm	12/24 VDC/220-240VAC	3°/8°
4x3W	OSRAM/CREE	Single	IK05	780lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x13W	CREE COB	Single	IK05	1310lm	24 VDC/220-240VAC	18°/24°/38°/60°
4x3W	OSRAM	RGB 3in 1	IK05	168lm	12/24 VDC/220-240VAC	25°/40°/60°
4x3.5W	OSRAM	RGBW 4in 1	IK05	224lm	12/24 VDC/220-240VAC	25°/40°/60°

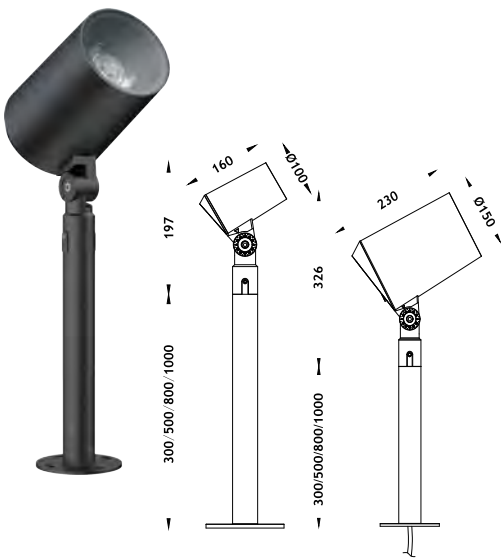


ASP3100R

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x5W	CREE	Single	IK05	1140lm	12/24 VDC/220-240VAC	3°/8°
6x3W	OSRAM/CREE	Single	IK05	1200lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x20W	CREE COB	Single	IK05	2200lm	24 VDC/220-240VAC	18°/24°/38°/60°
6x2.5W	OSRAM	RGB 3in 1	IK05	360lm	12/24 VDC/220-240VAC	25°/40°/60°
6x3.5W	OSRAM	RGBW 4in 1	IK05	480lm	12/24 VDC/220-240VAC	25°/40°/60°

ASP3150R

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x7W	CREE	Single	IK05	2520lm	12/24 VDC/220-240VAC	3°/8°
12x3.5W	OSRAM/CREE	Single	IK05	2520lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x40W	CREE COB	Single	IK05	3800lm	24 VDC/220-240VAC	18°/24°/38°/60°
12x2.5W	OSRAM	RGB 3in 1	IK05	660lm	12/24 VDC/220-240VAC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in 1	IK05	990lm	12/24 VDC/220-240VAC	25°/40°/60°

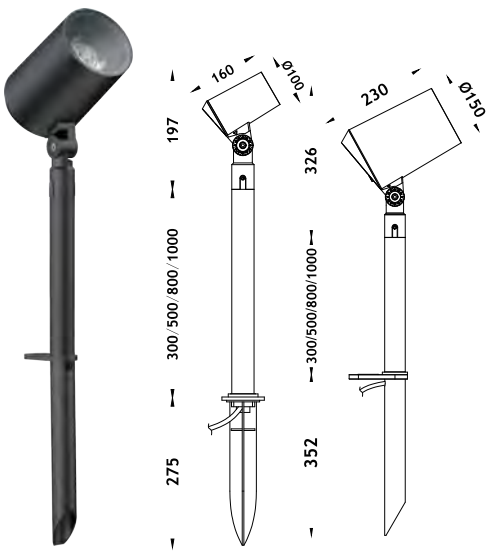

ASP3100R

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x5W	CREE	Single	IK05	1140lm	12/24 VDC/220-240VAC	3°/8°
6x3W	OSRAM/CREE	Single	IK05	1200lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x20W	CREE COB	Single	IK05	2200lm	24 VDC/220-240VAC	18°/24°/38°/60°
6x2.5W	OSRAM	RGB 3in 1	IK05	360lm	12/24 VDC/220-240VAC	25°/40°/60°
6x3.5W	OSRAM	RGBW 4in 1	IK05	480lm	12/24 VDC/220-240VAC	25°/40°/60°

ASP3150R

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x7W	CREE	Single	IK05	2520lm	12/24 VDC/220-240VAC	3°/8°
12x3.5W	OSRAM/CREE	Single	IK05	2520lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x40W	CREE COB	Single	IK05	3800lm	24 VDC/220-240VAC	18°/24°/38°/60°
12x2.5W	OSRAM	RGB 3in 1	IK05	660lm	12/24 VDC/220-240VAC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in 1	IK05	990lm	12/24 VDC/220-240VAC	25°/40°/60°



Series 3K


Spot luminaires stand out for special housing design and high quality optical components specifically for demanding visual tasks to provide enhanced visual comfort.

Housing made of 12# Die-casting aluminum with Akzo powder coated. Clear tempered safety glass, transmittance efficiency is over 95% and the accuracy of color temperature as well as strong impact resistance bearing capacity. Quick & simple installation with low maintenance.




Elliptical(Asymmetric) Diffusers Angle(FWHM)

Available to all models under Series 3K

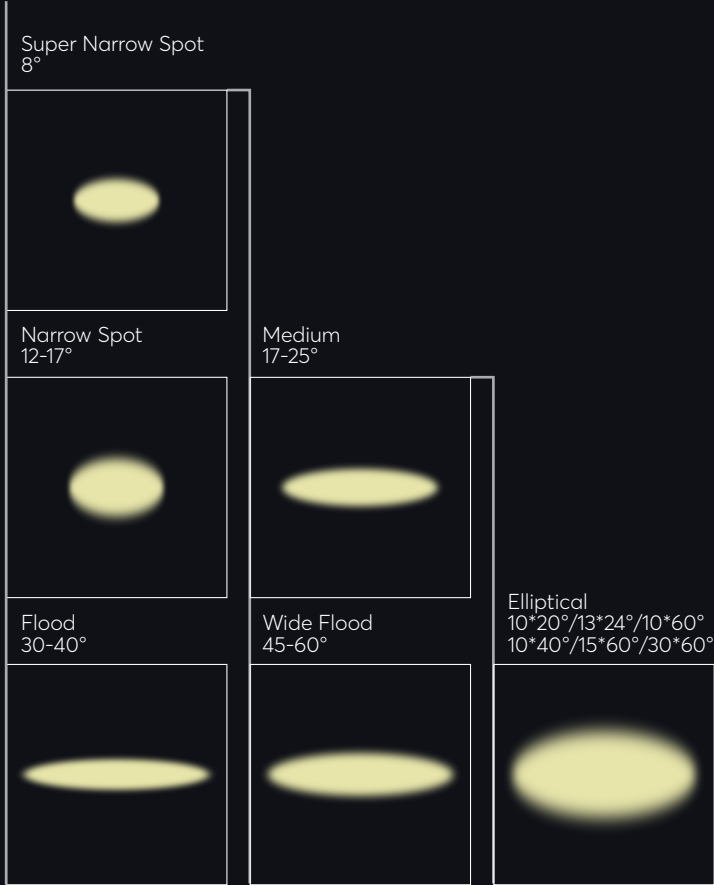


Lens/Reflector Cup Angle

Available to all models under Series 3K

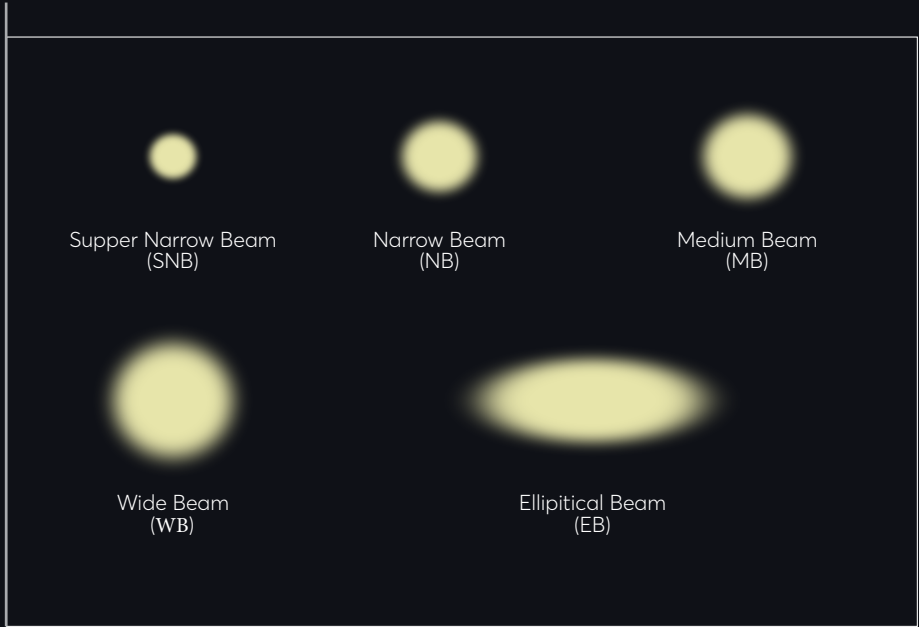

Series 3K
New LED Spot Light



Spot light series with exemplary design and compact dimensions. With precise optics.

they are used for accent lighting on facades or to illuminate objects from a long distance. The spot light are available in 4 different sizes and wattages. There is a choice of different optics – collimators, wide beam reflectors or an optic for uniform illumination of streets and pathways. The combination of spot lights with different optics makes creative lighting scenarios possible.

Customized: Black, Red, White, etc.



Honeycomb


Radar Circle

Slanted Hat

Straight Hat


Stretch Film (10°60°)

Accessories



SCENE





Soft light film



Honeycomb grille



Honeycomb glass



Series 3K Round Spot Light

Sturdy construction in order to maintain performance of the luminaire and to reduce maintenance costs.

Comes with arich range of useful accessories both to solve different Types of installation and to control glare.

Applicable for outdoor installation, hotel, villa, facade, garden, redidential.



Honeycomb



Radar Circle



Slanted Hat




Straight Hat



Stretch Film (10*60")

Accessories




Application



Series 3K Round Spot Light

CE ENEC IP65 RoHS 1-10V Triac PWM DALI DMX RGB RGBW


ASP3033R

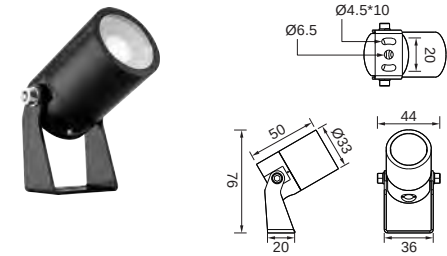

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1x2.5W CREE XPE/OSRAM 3030	Black	IK05	--	12/24VDC	5°/10°/15°/20°/30°/40°/60°/10°45°/25°45°
	Red	IK05			
	White	IK05			




ASP3069R

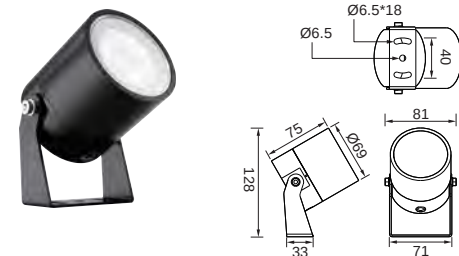

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1x10W CREE 1512	Black	IK05	900LM	12/24VDC	12°/24°/36°/55°
	Red	IK05		220-240VAC	
	White	IK05			




ASP3043R

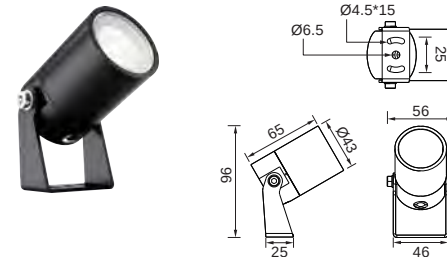

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1x4W CREE 1304	Black	IK05	340LM	12/24VDC	15°/24°/36°/55°
	Red	IK05		220-240VAC	
	White	IK05			




ASP3085R

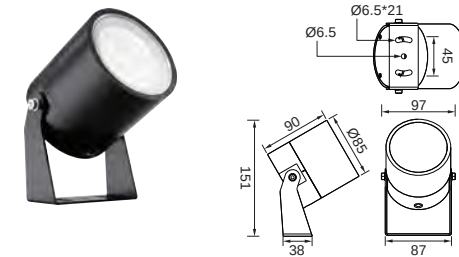

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1x15W CREE 1512	Black	IK05	1467LM	12/24VDC	12°/24°/36°/55°
	Red	IK05		220-240VAC	
	White	IK05			




ASP3055R

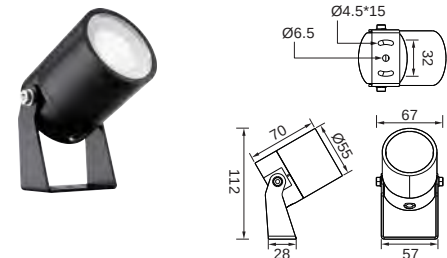

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1x6W CREE 1304	Black	IK05	454LM	12/24VDC	15°/24°/36°/55°
	Red	IK05		220-240VAC	
	White	IK05			



ASP3105R

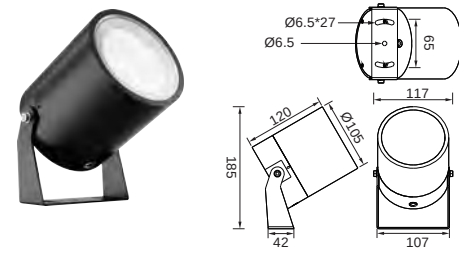


Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1x23W CREE 1820	Black	IK05	1749LM	12/24VDC	15°/24°/36°/55°
	Red	IK05		220-240VAC	
	White	IK05			



Series 3K Round Spot Light(Slanted Hat)

CE ENEC IP65 RoHS 1-10V Triac PWM DALI DMX RGB RGBW


ASP3033R

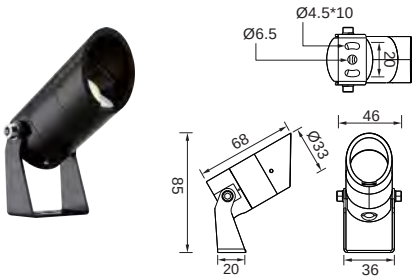

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1x2.5W CREE XPE/OSRAM 3030	Black	IK05	--	12/24VDC	5°/10°/15°/20°/30°/40°/60°/10°/45°/25°/45°
	Red	IK05			
	White	IK05			




ASP3069R

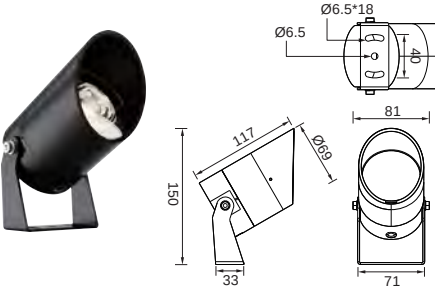

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1x10W CREE 1512	Black	IK05	900LM	12/24VDC	12°/24°/36°/55°
	Red	IK05		220-240VAC	
	White	IK05			




ASP3043R

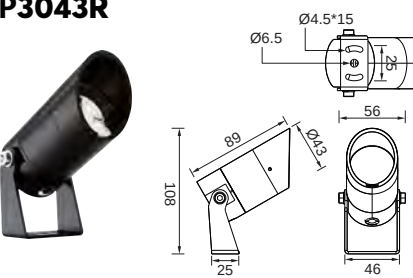

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1x4W CREE 1304	Black	IK05	340LM	12/24VDC	15°/24°/36°/55°
	Red	IK05		220-240VAC	
	White	IK05			




ASP3085R

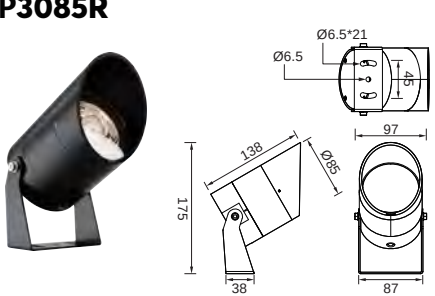

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1x15W CREE 1512	Black	IK05	1467LM	12/24VDC	12°/24°/36°/55°
	Red	IK05		220-240VAC	
	White	IK05			




ASP3055R

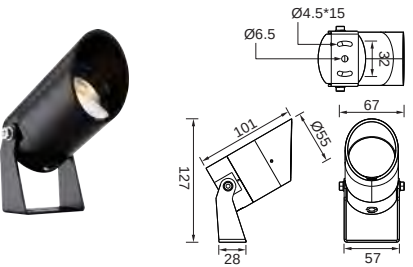

Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1x6W CREE 1304	Black	IK05	454LM	12/24VDC	15°/24°/36°/55°
	Red	IK05		220-240VAC	
	White	IK05			



ASP3105R

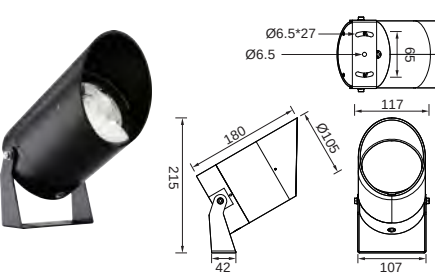


Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1x23W CREE 1820	Black	IK05	1749LM	12/24VDC	15°/24°/36°/55°
	Red	IK05		220-240VAC	
	White	IK05			



Series 3K Round Spot Light(Straight Hat)

CE ErP IP65 RoHS 1-10V Triac PWM DALI DMX RGB RGBW

ASP3033R

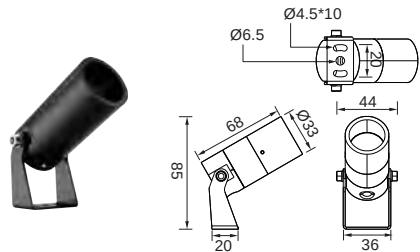

Power LED

1x2.5W CREE XPE/OSRAM 3030

Color

Black

IK

IK05

Luminous

--

Input Voltage


12/24VDC

Beam Angle

5°/10°/15°/20°/30°/40°/60°/10°/45°/25°/45°



ASP3069R

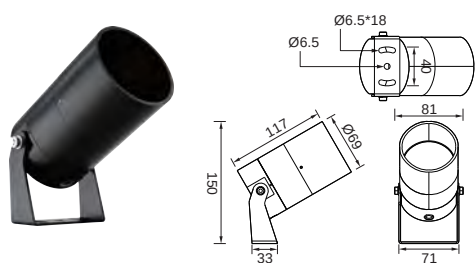

Power LED

1x10W CREE 1512

Color

Black

IK

IK05

Luminous

900LM

Input Voltage


12/24VDC

Beam Angle

12°/24°/36°/55°



ASP3043R

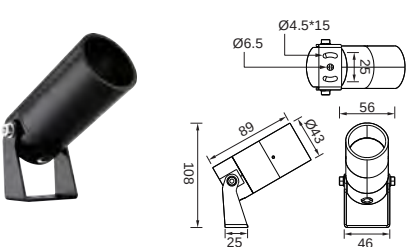

Power LED

1x4W CREE 1304

Color

Black

IK

IK05

Luminous

340LM

Input Voltage


12/24VDC

Beam Angle

15°/24°/36°/55°



ASP3085R

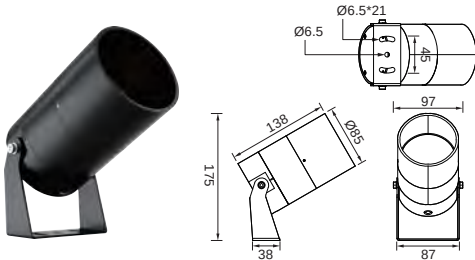

Power LED

1x15W CREE 1512

Color

Black

IK

IK05

Luminous

1467LM

Input Voltage


12/24VDC

Beam Angle

12°/24°/36°/55°



ASP3055R

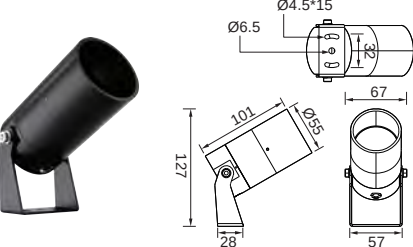

Power LED

1x6W CREE 1304

Color

Black

IK

IK05

Luminous

454LM

Input Voltage


12/24VDC

Beam Angle

15°/24°/36°/55°



ASP3105R

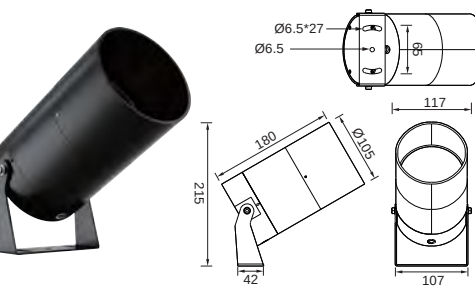

Power LED

1x23W CREE 1820

Color

Black

IK

IK05

Luminous

1749LM

Input Voltage

12/24VDC

Beam Angle

15°/24°/36°/55°







Series 3K Square Spot Light



CE ENEC IP65 RoHS 1-10V Triac PWM DALI DMX RGB RGBW

ASP3050S




Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1x6W CREE 1304	Black	IK05	--	12/24VDC	15°/24°/36°/55°
	Red	IK05		220-240VAC	
	White	IK05			

ASP3075S





Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1x16W CREE 1512	Black	IK05	1232LM/1360LM	12/24VDC	15°/24°/36°/55°
	Red	IK05		220-240VAC	
	White	IK05			

ASP3060S



Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1x10W CREE 1512	Black	IK05	1050LM	12/24VDC	12°/24°/36°/55°
	Red	IK05		220-240VAC	
	White	IK05			

ASP3100S




Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1x23W CREE 1820	Black	IK05	1749LM	12/24VDC	10°/24°/36°/55°
	Red	IK05		220-240VAC	
	White	IK05			

Series 3K Square Spot Light(Slanted Hat)

CE ENEC IP65 RoHS 1-10V Triac PWM DALI DMX RGB RGBW

ASP3050S

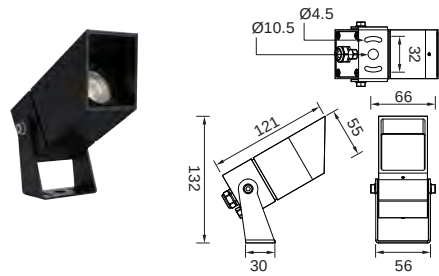

Power LED

1x6W CREE 1304

Color IK Luminous Input Voltage Beam Angle

Black	IK05
Red	IK05
White	IK05


--

12/24VDC
220-240VAC

15°/24°/36°/55°



ASP3075S

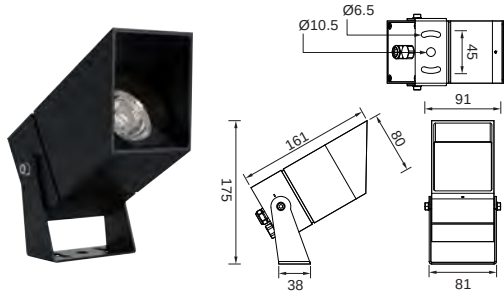

Power LED

1x16W CREE 1512

Color IK Luminous Input Voltage Beam Angle

Black	IK05
Red	IK05
White	IK05


1232LM/1360LM

12/24VDC
220-240VAC

15°/24°/36°/55°



ASP3060S

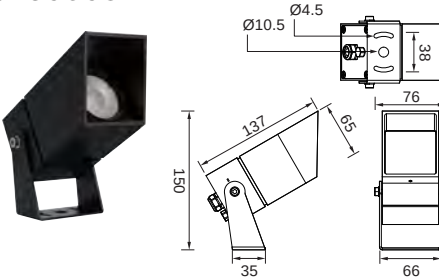

Power LED

1x10W CREE 1512

Color IK Luminous Input Voltage Beam Angle

Black	IK05
Red	IK05
White	IK05


1050LM

12/24VDC
220-240VAC

12°/24°/36°/55°



ASP3100S

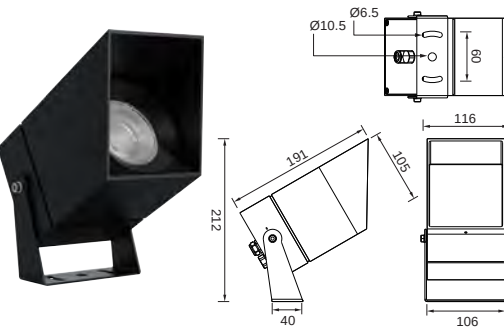

Power LED

1x23W CREE 1820

Color IK Luminous Input Voltage Beam Angle

Black	IK05
Red	IK05
White	IK05

1749LM

12/24VDC
220-240VAC


10°/24°/36°/55°



Series 3K Square Spot Light(Straight Hat)

CE ErP IP65 RoHS 1-10V Triac PWM DALI DMX RGB RGBW

ASP3050S

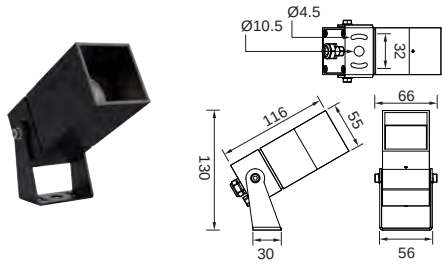

Power LED

1x6W CREE 1304

Color IK Luminous Input Voltage Beam Angle

Black	IK05
Red	IK05
White	IK05


--

12/24VDC
220-240VAC

15°/24°/36°/55°



ASP3075S

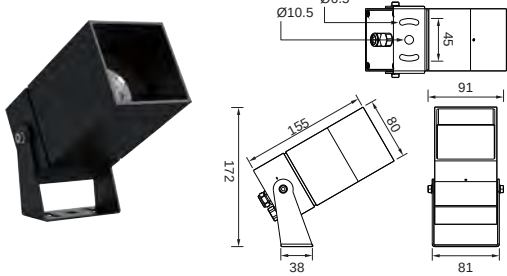

Power LED

1x16W CREE 1512

Color IK Luminous Input Voltage Beam Angle

Black	IK05
Red	IK05
White	IK05


1232LM/1360LM

12/24VDC
220-240VAC

15°/24°/36°/55°



ASP3060S

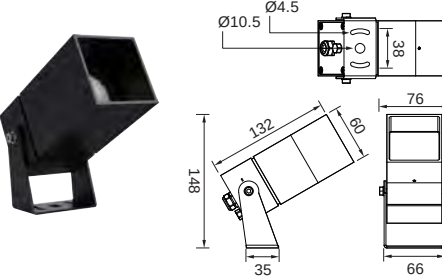

Power LED

1x10W CREE 1512

Color IK Luminous Input Voltage Beam Angle

Black	IK05
Red	IK05
White	IK05


1050LM

12/24VDC
220-240VAC

12°/24°/36°/55°



ASP3100S

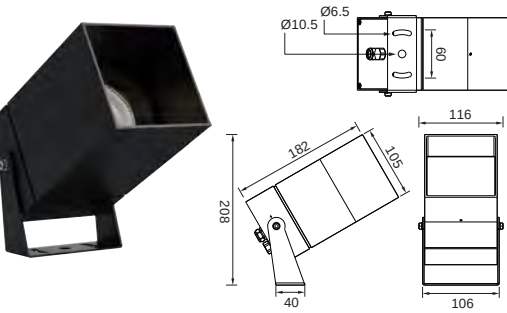

Power LED

1x23W CREE 1820

Color IK Luminous Input Voltage Beam Angle

Black	IK05
Red	IK05
White	IK05

1749LM

12/24VDC
220-240VAC


10°/24°/36°/55°



LED Landscape Spot Light -- Series 3H


CE ENEC IP65 RoHS 1-10V Triac PWM DALI DMX RGB RGBW

ASP3045R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x4W	OSRAM/CREE	Single	IK04	380lm	12/24 VDC/220-240VAC	5°/8°/10°/30°/40°/60°
1x6W	CREE COB	Single	IK04	465lm	12/24 VDC/220-240VAC	15°/24°/36°/55°
1x3W	OSRAM	RGB 3in 1	IK04	60lm	12/24 VDC	20°/30°/40°/60°
1x4W	OSRAM	RGBW 4in 1	IK04	80lm	12/24 VDC	20°/30°/40°/60°

ASP3045R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x4W	OSRAM/CREE	Single	IK04	380lm	12/24 VDC/220-240VAC	5°/8°/10°/30°/40°/60°
1x6W	CREE COB	Single	IK04	465lm	12/24 VDC/220-240VAC	15°/24°/36°/55°
1x3W	OSRAM	RGB 3in 1	IK04	60lm	12/24 VDC	20°/30°/40°/60°
1x4W	OSRAM	RGBW 4in 1	IK04	80lm	12/24 VDC	20°/30°/40°/60°

ASP3065R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x4W	OSRAM/CREE	Single	IK04	960lm	12/24 VDC/220-240VAC	8°/10°/30°/40°/60°
1x12W	CREE COB	Single	IK04	1260lm	12/24 VDC/220-240VAC	15°/24°/36°/55°
3x2.5W	OSRAM	RGB 3in 1	IK04	220lm	12/24 VDC	20°/30°/40°/60°
3x3.5W	OSRAM	RGBW 4in 1	IK04	260lm	12/24 VDC	20°/30°/40°/60°

ASP3065R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x4W	OSRAM/CREE	Single	IK04	960lm	12/24 VDC/220-240VAC	8°/10°/30°/40°/60°
1x12W	CREE COB	Single	IK04	1260lm	12/24 VDC/220-240VAC	15°/24°/36°/55°
3x2.5W	OSRAM	RGB 3in 1	IK04	220lm	12/24 VDC	20°/30°/40°/60°
3x3.5W	OSRAM	RGBW 4in 1	IK04	260lm	12/24 VDC	20°/30°/40°/60°

ASP3075R



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
4x4W	OSRAM/CREE	Single	IK04	1280lm	12/24 VDC/220-240VAC	8°/10°/30°/40°/60°
1x16W	CREE COB	Single	IK04	1840lm	12/24 VDC/220-240VAC	15°/24°/36°/55°
4x2.5W	OSRAM	RGB 3in 1	IK04	250lm	12/24 VDC	20°/30°/40°/60°
4x3.5W	OSRAM	RGBW 4in 1	IK04	350lm	12/24 VDC	20°/30°/40°/60°

ASP3075R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
4x4W	OSRAM/CREE	Single	IK04	1280lm	12/24 VDC/220-240VAC	8°/10°/30°/40°/60°
1x16W	CREE COB	Single	IK04	1840lm	12/24 VDC/220-240VAC	15°/24°/36°/55°
4x2.5W	OSRAM	RGB 3in 1	IK04	250lm	12/24 VDC	20°/30°/40°/60°
4x3.5W	OSRAM	RGBW 4in 1	IK04	350lm	12/24 VDC	20°/30°/40°/60°




LED Landscape Spot Light -- Series 3H

CE ENEC IP65 RoHS 1-10V Triac PWM DALI DMX RGB RGBW


ASP3045R

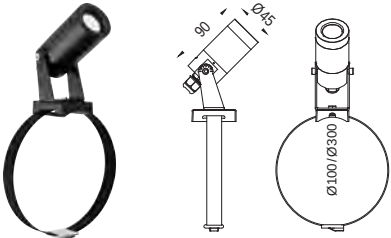


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x4W	OSRAM/CREE	Single	IK04	380lm	12/24 VDC/220-240VAC	5°/8°/10°/30°/40°/60°
1x6W	CREE COB	Single	IK04	465lm	12/24 VDC/220-240VAC	15°/24°/36°/55°
1x3W	OSRAM	RGB 3in 1	IK04	60lm	12/24 VDC	20°/30°/40°/60°
1x4W	OSRAM	RGBW 4in 1	IK04	80lm	12/24 VDC	20°/30°/40°/60°




ASP3045R

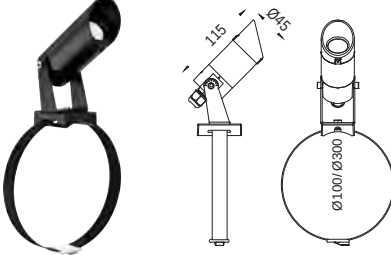


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x4W	OSRAM/CREE	Single	IK04	380lm	12/24 VDC/220-240VAC	5°/8°/10°/30°/40°/60°
1x6W	CREE COB	Single	IK04	465lm	12/24 VDC/220-240VAC	15°/24°/36°/55°
1x3W	OSRAM	RGB 3in 1	IK04	60lm	12/24 VDC	20°/30°/40°/60°
1x4W	OSRAM	RGBW 4in 1	IK04	80lm	12/24 VDC	20°/30°/40°/60°




ASP3065R

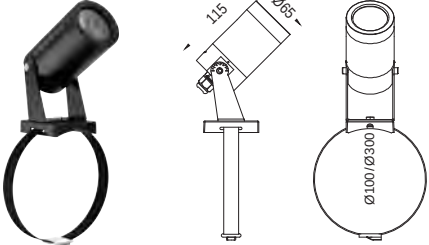


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x4W	OSRAM/CREE	Single	IK04	960lm	12/24 VDC/220-240VAC	8°/10°/30°/40°/60°
1x12W	CREE COB	Single	IK04	1260lm	12/24 VDC/220-240VAC	15°/24°/36°/55°
3x2.5W	OSRAM	RGB 3in 1	IK04	220lm	12/24 VDC	20°/30°/40°/60°
3x3.5W	OSRAM	RGBW 4in 1	IK04	260lm	12/24 VDC	20°/30°/40°/60°




ASP3065R

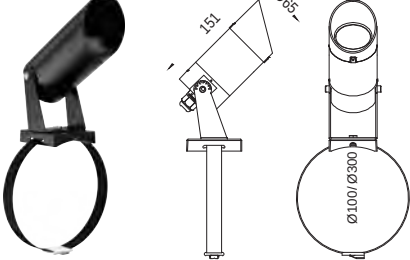


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x4W	OSRAM/CREE	Single	IK04	960lm	12/24 VDC/220-240VAC	8°/10°/30°/40°/60°
1x12W	CREE COB	Single	IK04	1260lm	12/24 VDC/220-240VAC	15°/24°/36°/55°
3x2.5W	OSRAM	RGB 3in 1	IK04	220lm	12/24 VDC	20°/30°/40°/60°
3x3.5W	OSRAM	RGBW 4in 1	IK04	260lm	12/24 VDC	20°/30°/40°/60°




ASP3075R

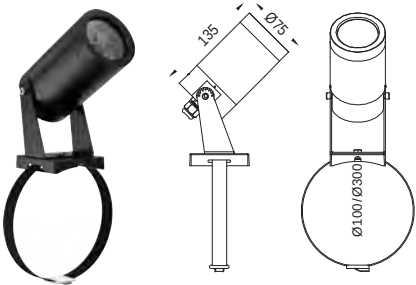


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
4x4W	OSRAM/CREE	Single	IK04	1280lm	12/24 VDC/220-240VAC	8°/10°/30°/40°/60°
1x16W	CREE COB	Single	IK04	1840lm	12/24 VDC/220-240VAC	15°/24°/36°/55°
4x2.5W	OSRAM	RGB 3in 1	IK04	250lm	12/24 VDC	20°/30°/40°/60°
4x3.5W	OSRAM	RGBW 4in 1	IK04	350lm	12/24 VDC	20°/30°/40°/60°



ASP3075R

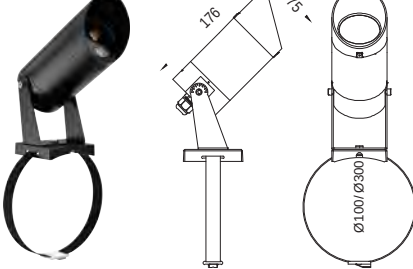


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
4x4W	OSRAM/CREE	Single	IK04	1280lm	12/24 VDC/220-240VAC	8°/10°/30°/40°/60°
1x16W	CREE COB	Single	IK04	1840lm	12/24 VDC/220-240VAC	15°/24°/36°/55°
4x2.5W	OSRAM	RGB 3in 1	IK04	250lm	12/24 VDC	20°/30°/40°/60°
4x3.5W	OSRAM	RGBW 4in 1	IK04	350lm	12/24 VDC	20°/30°/40°/60°




LED Landscape Spot Light -- Series 3H

CE ENEC IP65 RoHS Compliant 1-10V Triac PWM DALI DMX RGB RGBW


ASP3045R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x4W	OSRAM/CREE	Single	IK04	380lm	12/24 VDC/220-240VAC	5°/8°/10°/30°/40°/60°
1x6W	CREE COB	Single	IK04	465lm	12/24 VDC/220-240VAC	15°/24°/36°/55°
1x3W	OSRAM	RGB 3in 1	IK04	60lm	12/24 VDC	20°/30°/40°/60°
1x4W	OSRAM	RGBW 4in 1	IK04	80lm	12/24 VDC	20°/30°/40°/60°




ASP3045R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x4W	OSRAM/CREE	Single	IK04	380lm	12/24 VDC/220-240VAC	5°/8°/10°/30°/40°/60°
1x6W	CREE COB	Single	IK04	465lm	12/24 VDC/220-240VAC	15°/24°/36°/55°
1x3W	OSRAM	RGB 3in 1	IK04	60lm	12/24 VDC	20°/30°/40°/60°
1x4W	OSRAM	RGBW 4in 1	IK04	80lm	12/24 VDC	20°/30°/40°/60°




ASP3065R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x4W	OSRAM/CREE	Single	IK04	960lm	12/24 VDC/220-240VAC	8°/10°/30°/40°/60°
1x12W	CREE COB	Single	IK04	1260lm	12/24 VDC/220-240VAC	15°/24°/36°/55°
3x2.5W	OSRAM	RGB 3in 1	IK04	220lm	12/24 VDC	20°/30°/40°/60°
3x3.5W	OSRAM	RGBW 4in 1	IK04	260lm	12/24 VDC	20°/30°/40°/60°




ASP3065R

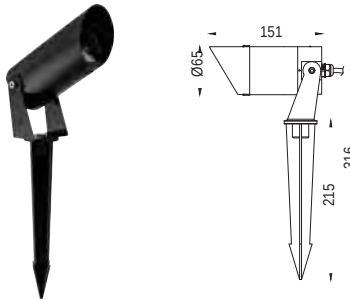


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x4W	OSRAM/CREE	Single	IK04	960lm	12/24 VDC/220-240VAC	8°/10°/30°/40°/60°
1x12W	CREE COB	Single	IK04	1260lm	12/24 VDC/220-240VAC	15°/24°/36°/55°
3x2.5W	OSRAM	RGB 3in 1	IK04	220lm	12/24 VDC	20°/30°/40°/60°
3x3.5W	OSRAM	RGBW 4in 1	IK04	260lm	12/24 VDC	20°/30°/40°/60°




ASP3075R

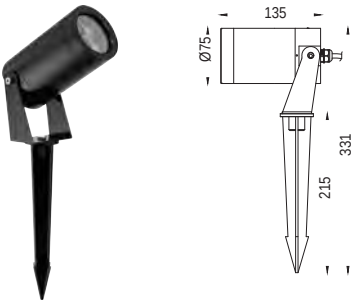


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
4x4W	OSRAM/CREE	Single	IK04	1280lm	12/24 VDC/220-240VAC	8°/10°/30°/40°/60°
1x16W	CREE COB	Single	IK04	1840lm	12/24 VDC/220-240VAC	15°/24°/36°/55°
4x2.5W	OSRAM	RGB 3in 1	IK04	250lm	12/24 VDC	20°/30°/40°/60°
4x3.5W	OSRAM	RGBW 4in 1	IK04	350lm	12/24 VDC	20°/30°/40°/60°




ASP3075R

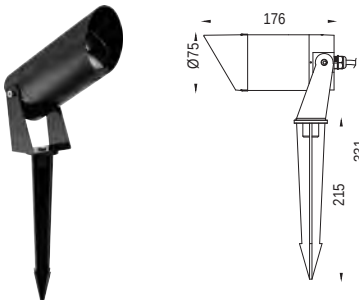

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
4x4W	OSRAM/CREE	Single	IK04	1280lm	12/24 VDC/220-240VAC	8°/10°/30°/40°/60°
1x16W	CREE COB	Single	IK04	1840lm	12/24 VDC/220-240VAC	15°/24°/36°/55°
4x2.5W	OSRAM	RGB 3in 1	IK04	250lm	12/24 VDC	20°/30°/40°/60°
4x3.5W	OSRAM	RGBW 4in 1	IK04	350lm	12/24 VDC	20°/30°/40°/60°



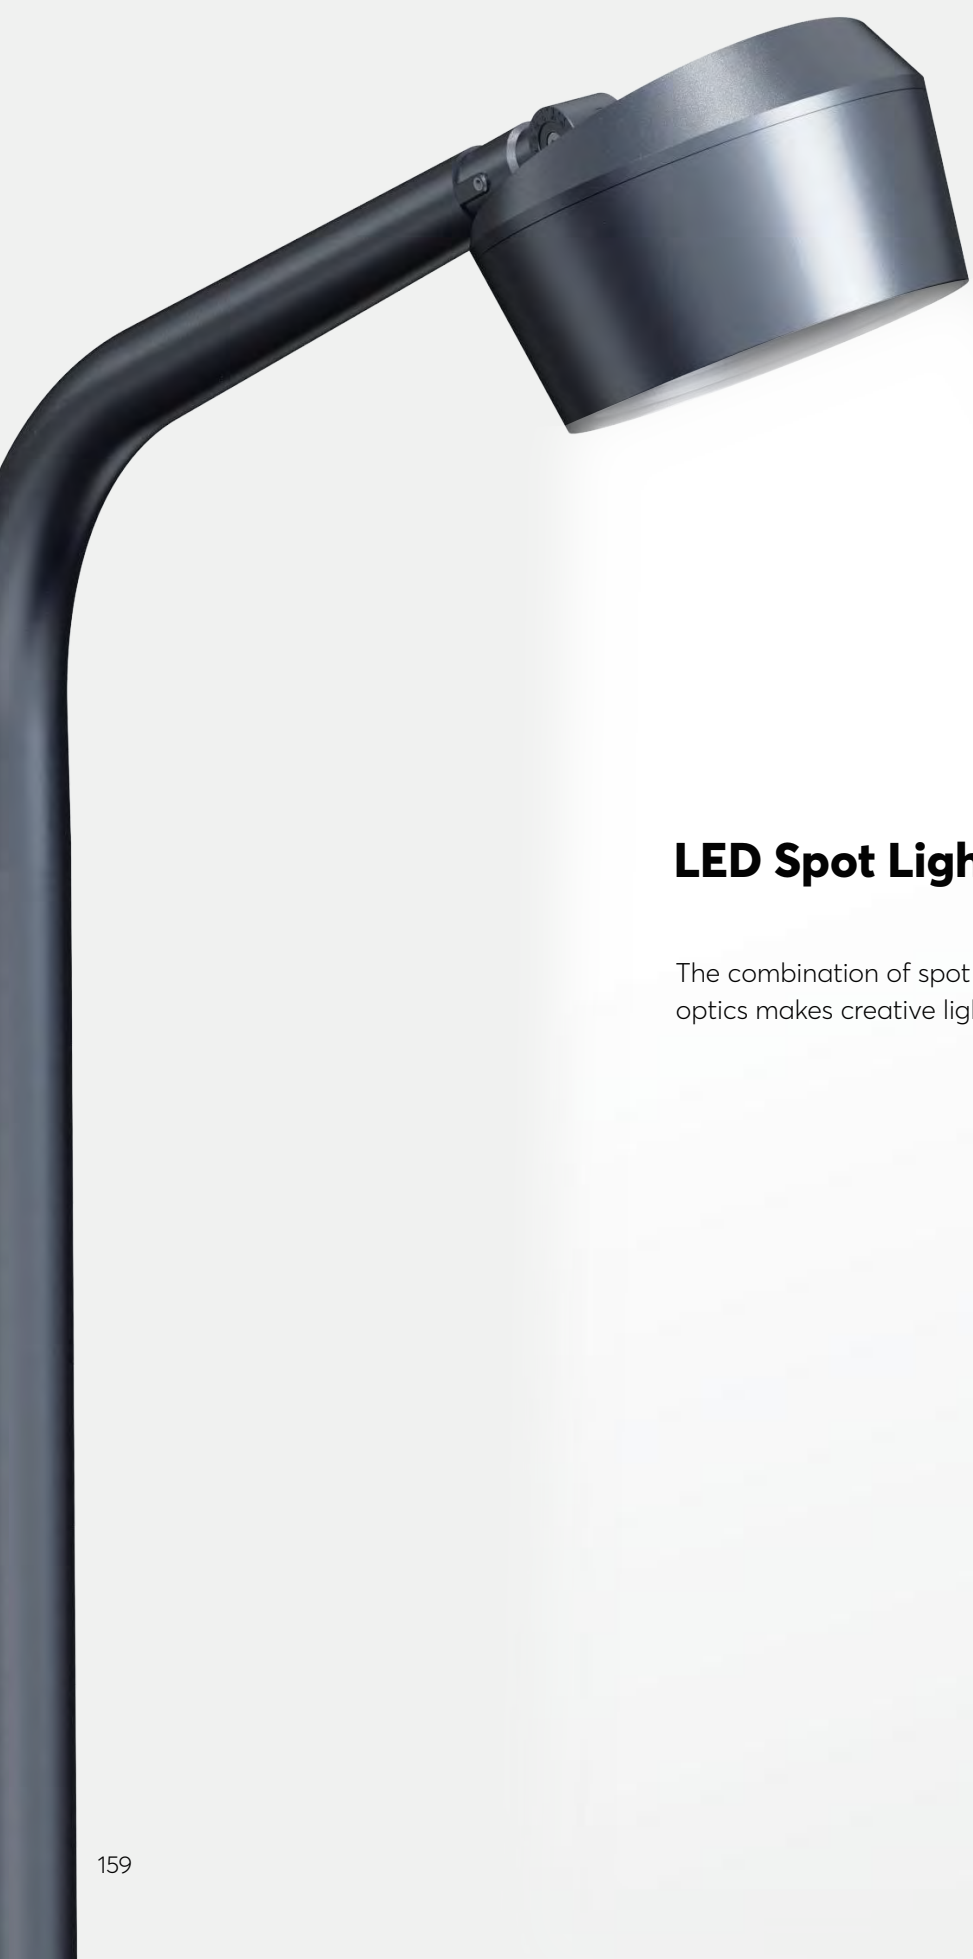

LED Spot Light

The combination of spot lights with different optics makes creative lighting scenarios possible.



LED High Pole Spot Lights

The Combination



Locking Rod




Hugging Pillar

Spot Light


LED Landscape Spot Light -- Series TW

CE ENEC IP66 RoHS 1-10V Triac PWM DALI DMX RGB RGBW


ASP3130R

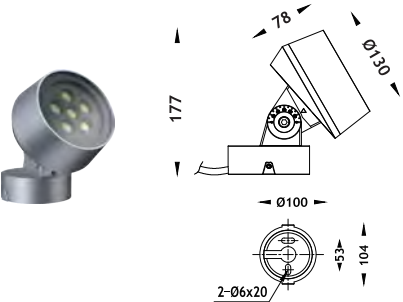


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x4W	CREE	Single	IK05	700lm	12/24 VDC/220-240VAC	3°/8°
6x3W	OSRAM/CREE	Single	IK05	1080lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x18W	CREE COB	Single	IK05	1520lm	24 VDC/220-240VAC	18°/24°/38°/60°
6x2.5W	OSRAM	RGB 3in 1	IK05	380lm	12/24 VDC/220-240VAC	25°/40°/60°
6x3.5W	OSRAM	RGBW 4in 1	IK05	520lm	12/24 VDC/220-240VAC	25°/40°/60°




ASP3130R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x4W	CREE	Single	IK05	700lm	12/24 VDC/220-240VAC	3°/8°
6x3W	OSRAM/CREE	Single	IK05	1080lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x18W	CREE COB	Single	IK05	1520lm	24 VDC/220-240VAC	18°/24°/38°/60°
6x2.5W	OSRAM	RGB 3in 1	IK05	380lm	12/24 VDC/220-240VAC	25°/40°/60°
6x3.5W	OSRAM	RGBW 4in 1	IK05	520lm	12/24 VDC/220-240VAC	25°/40°/60°




ASP3170R

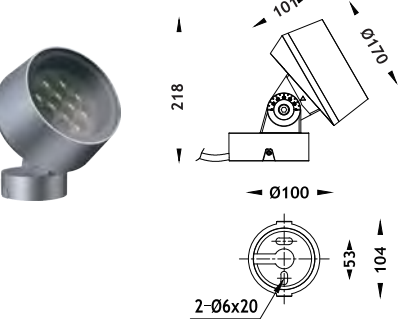


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x4W	CREE	Single	IK05	1340lm	12/24 VDC/220-240VAC	3°/8°
12x3W	OSRAM/CREE	Single	IK05	2450lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x35W	CREE COB	Single	IK05	3400lm	24 VDC/220-240VAC	18°/24°/38°/60°
12x2.5W	OSRAM	RGB 3in 1	IK05	600lm	12/24 VDC/220-240VAC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in 1	IK05	840lm	12/24 VDC/220-240VAC	25°/40°/60°




ASP3170R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x4W	CREE	Single	IK05	1340lm	12/24 VDC/220-240VAC	3°/8°
12x3W	OSRAM/CREE	Single	IK05	2450lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x35W	CREE COB	Single	IK05	3400lm	24 VDC/220-240VAC	18°/24°/38°/60°
12x2.5W	OSRAM	RGB 3in 1	IK05	600lm	12/24 VDC/220-240VAC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in 1	IK05	840lm	12/24 VDC/220-240VAC	25°/40°/60°




ASP3210R

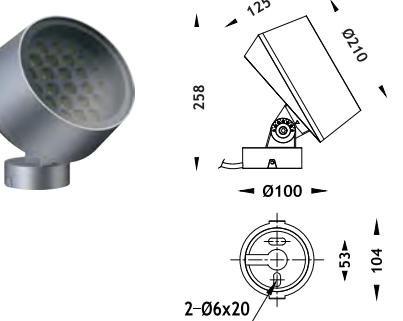


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x4W	CREE	Single	IK05	2400lm	12/24 VDC/220-240VAC	3°/8°
24x2W	OSRAM/CREE	Single	IK05	3750lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x14W	CREE COB	Single	IK05	4950lm	24 VDC/220-240VAC	18°/24°/38°/60°
24x2.5W	OSRAM	RGB 3in 1	IK05	1500lm	12/24 VDC/220-240VAC	25°/40°/60°
24x3.5W	OSRAM	RGBW 4in 1	IK05	2000lm	12/24 VDC/220-240VAC	25°/40°/60°




ASP3210R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x4W	CREE	Single	IK05	2400lm	12/24 VDC/220-240VAC	3°/8°
24x2W	OSRAM/CREE	Single	IK05	3750lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x14W	CREE COB	Single	IK05	4950lm	24 VDC/220-240VAC	18°/24°/38°/60°
24x2.5W	OSRAM	RGB 3in 1	IK05	1500lm	12/24 VDC/220-240VAC	25°/40°/60°
24x3.5W	OSRAM	RGBW 4in 1	IK05	2000lm	12/24 VDC/220-240VAC	25°/40°/60°




ASP3260R

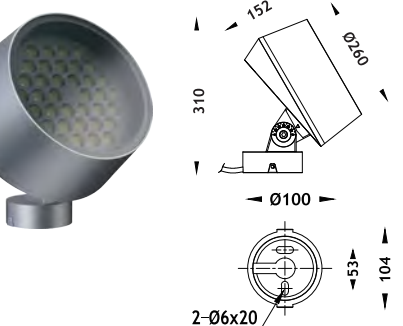


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
18x4W	CREE	Single	IK05	4500lm	12/24 VDC/220-240VAC	3°/8°
36x2W	OSRAM/CREE	Single	IK05	4900lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x18W	CREE COB	Single	IK05	6400lm	24 VDC/220-240VAC	18°/24°/38°/60°
36x3W	OSRAM	RGB 3in 1	IK05	2700lm	12/24 VDC/220-240VAC	25°/40°/60°
36x4W	OSRAM	RGBW 4in 1	IK05	3420lm	12/24 VDC/220-240VAC	25°/40°/60°



A3260R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
18x4W	CREE	Single	IK05	4500lm	12/24 VDC/220-240VAC	3°/8°
36x2W	OSRAM/CREE	Single	IK05	4900lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x18W	CREE COB	Single	IK05	6400lm	24 VDC/220-240VAC	18°/24°/38°/60°
36x3W	OSRAM	RGB 3in 1	IK05	2700lm	12/24 VDC/220-240VAC	25°/40°/60°
36x4W	OSRAM	RGBW 4in 1	IK05	3420lm	12/24 VDC/220-240VAC	25°/40°/60°




LED Landscape Spot Light -- Series TW

CE ENEC IP66 RoHS 1-10V Triac PWM DALI DMX RGB RGBW


ASP3130R

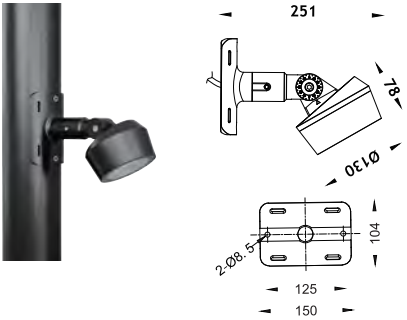


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x4W	CREE	Single	IK05	700lm	12/24 VDC/220-240VAC	3°/8°
6x3W	OSRAM/CREE	Single	IK05	1080lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x18W	CREE COB	Single	IK05	1520lm	24 VDC/220-240VAC	18°/24°/38°/60°
6x2.5W	OSRAM	RGB 3in 1	IK05	380lm	12/24 VDC/220-240VAC	25°/40°/60°
6x3.5W	OSRAM	RGBW 4in 1	IK05	520lm	12/24 VDC/220-240VAC	25°/40°/60°




ASP3130R

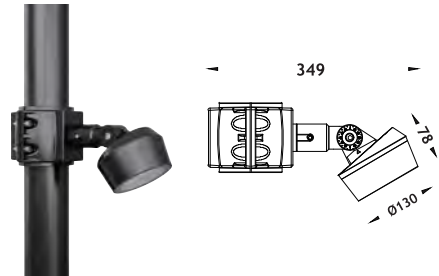


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x4W	CREE	Single	IK05	700lm	12/24 VDC/220-240VAC	3°/8°
6x3W	OSRAM/CREE	Single	IK05	1080lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x18W	CREE COB	Single	IK05	1520lm	24 VDC/220-240VAC	18°/24°/38°/60°
6x2.5W	OSRAM	RGB 3in 1	IK05	380lm	12/24 VDC/220-240VAC	25°/40°/60°
6x3.5W	OSRAM	RGBW 4in 1	IK05	520lm	12/24 VDC/220-240VAC	25°/40°/60°




ASP3170R

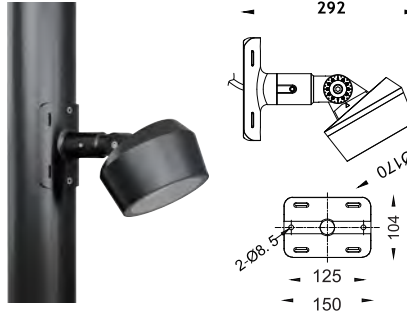


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x4W	CREE	Single	IK05	1340lm	12/24 VDC/220-240VAC	3°/8°
12x3W	OSRAM/CREE	Single	IK05	2450lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x35W	CREE COB	Single	IK05	3400lm	24 VDC/220-240VAC	18°/24°/38°/60°
12x2.5W	OSRAM	RGB 3in 1	IK05	600lm	12/24 VDC/220-240VAC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in 1	IK05	840lm	12/24 VDC/220-240VAC	25°/40°/60°




ASP3170R

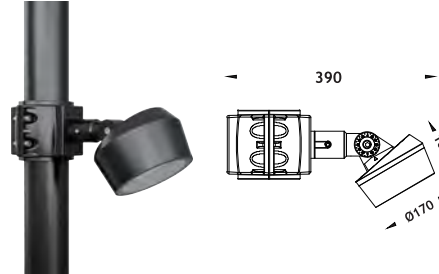


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x4W	CREE	Single	IK05	1340lm	12/24 VDC/220-240VAC	3°/8°
12x3W	OSRAM/CREE	Single	IK05	2450lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x35W	CREE COB	Single	IK05	3400lm	24 VDC/220-240VAC	18°/24°/38°/60°
12x2.5W	OSRAM	RGB 3in 1	IK05	600lm	12/24 VDC/220-240VAC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in 1	IK05	840lm	12/24 VDC/220-240VAC	25°/40°/60°




ASP3210R

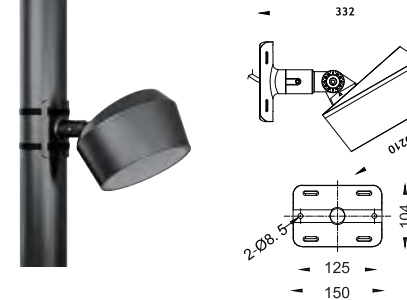


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x4W	CREE	Single	IK05	2400lm	12/24 VDC/220-240VAC	3°/8°
24x2W	OSRAM/CREE	Single	IK05	3750lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x14W	CREE COB	Single	IK05	4950lm	24 VDC/220-240VAC	18°/24°/38°/60°
24x2.5W	OSRAM	RGB 3in 1	IK05	1500lm	12/24 VDC/220-240VAC	25°/40°/60°
24x3.5W	OSRAM	RGBW 4in 1	IK05	2000lm	12/24 VDC/220-240VAC	25°/40°/60°




ASP3210R

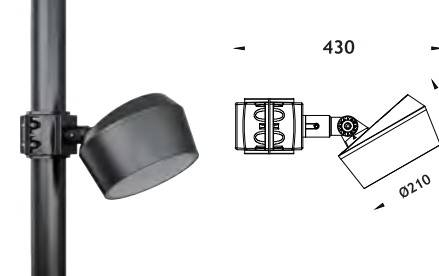


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x4W	CREE	Single	IK05	2400lm	12/24 VDC/220-240VAC	3°/8°
24x2W	OSRAM/CREE	Single	IK05	3750lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x14W	CREE COB	Single	IK05	4950lm	24 VDC/220-240VAC	18°/24°/38°/60°
24x2.5W	OSRAM	RGB 3in 1	IK05	1500lm	12/24 VDC/220-240VAC	25°/40°/60°
24x3.5W	OSRAM	RGBW 4in 1	IK05	2000lm	12/24 VDC/220-240VAC	25°/40°/60°




ASP3260R

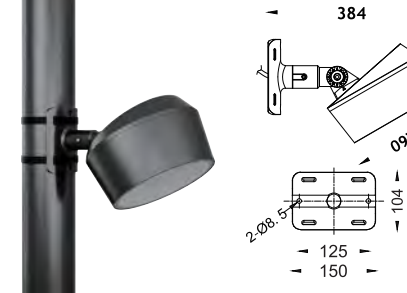


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
18x4W	CREE	Single	IK05	4500lm	12/24 VDC/220-240VAC	3°/8°
36x2W	OSRAM/CREE	Single	IK05	4900lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x18W	CREE COB	Single	IK05	6400lm	24 VDC/220-240VAC	18°/24°/38°/60°
36x3W	OSRAM	RGB 3in 1	IK05	2700lm	12/24 VDC/220-240VAC	25°/40°/60°
36x4W	OSRAM	RGBW 4in 1	IK05	3420lm	12/24 VDC/220-240VAC	25°/40°/60°



ASP3260R

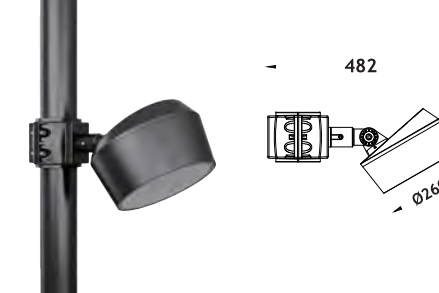

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
18x4W	CREE	Single	IK05	4500lm	12/24 VDC/220-240VAC	3°/8°
36x2W	OSRAM/CREE	Single	IK05	4900lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x18W	CREE COB	Single	IK05	6400lm	24 VDC/220-240VAC	18°/24°/38°/60°
36x3W	OSRAM	RGB 3in 1	IK05	2700lm	12/24 VDC/220-240VAC	25°/40°/60°
36x4W	OSRAM	RGBW 4in 1	IK05	3420lm	12/24 VDC/220-240VAC	25°/40°/60°





LED Landscape Spot Light -- Series TW



ASP3130R

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x4W	CREE	Single	IK05	700lm	12/24 VDC/220-240VAC	3°/8°
6x3W	OSRAM/CREE	Single	IK05	1080lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x18W	CREE COB	Single	IK05	1520lm	24 VDC/220-240VAC	18°/24°/38°/60°
6x2.5W	OSRAM	RGB 3in 1	IK05	380lm	12/24 VDC/220-240VAC	25°/40°/60°
6x3.5W	OSRAM	RGBW 4in 1	IK05	520lm	12/24 VDC/220-240VAC	25°/40°/60°

ASP3170R

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x4W	CREE	Single	IK05	1340lm	12/24 VDC/220-240VAC	3°/8°
12x3W	OSRAM/CREE	Single	IK05	2450lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x35W	CREE COB	Single	IK05	3400lm	24 VDC/220-240VAC	18°/24°/38°/60°
12x2.5W	OSRAM	RGB 3in 1	IK05	600lm	12/24 VDC/220-240VAC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in 1	IK05	840lm	12/24 VDC/220-240VAC	25°/40°/60°

ASP3130R

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x4W	CREE	Single	IK05	700lm	12/24 VDC/220-240VAC	3°/8°
6x3W	OSRAM/CREE	Single	IK05	1080lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x18W	CREE COB	Single	IK05	1520lm	24 VDC/220-240VAC	18°/24°/38°/60°
6x2.5W	OSRAM	RGB 3in 1	IK05	380lm	12/24 VDC/220-240VAC	25°/40°/60°
6x3.5W	OSRAM	RGBW 4in 1	IK05	520lm	12/24 VDC/220-240VAC	25°/40°/60°

ASP3170R

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x4W	CREE	Single	IK05	1340lm	12/24 VDC/220-240VAC	3°/8°
12x3W	OSRAM/CREE	Single	IK05	2450lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
1x35W	CREE COB	Single	IK05	3400lm	24 VDC/220-240VAC	18°/24°/38°/60°
12x2.5W	OSRAM	RGB 3in 1	IK05	600lm	12/24 VDC/220-240VAC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in 1	IK05	840lm	12/24 VDC/220-240VAC	25°/40°/60°

ASP3210R

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x4W	CREE	Single	IK05	2400lm	12/24 VDC/220-240VAC	3°/8°
24x2W	OSRAM/CREE	Single	IK05	3750lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x14W	CREE COB	Single	IK05	4950lm	24 VDC/220-240VAC	18°/24°/38°/60°
24x2.5W	OSRAM	RGB 3in 1	IK05	1500lm	12/24 VDC/220-240VAC	25°/40°/60°
24x3.5W	OSRAM	RGBW 4in 1	IK05	2000lm	12/24 VDC/220-240VAC	25°/40°/60°

ASP3260R

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
18x4W	CREE	Single	IK05	4500lm	12/24 VDC/220-240VAC	3°/8°
36x2W	OSRAM/CREE	Single	IK05	4900lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x18W	CREE COB	Single	IK05	6400lm	24 VDC/220-240VAC	18°/24°/38°/60°
36x3W	OSRAM	RGB 3in 1	IK05	2700lm	12/24 VDC/220-240VAC	25°/40°/60°
36x4W	OSRAM	RGBW 4in 1	IK05	3420lm	12/24 VDC/220-240VAC	25°/40°/60°

ASP3210R

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x4W	CREE	Single	IK05	2400lm	12/24 VDC/220-240VAC	3°/8°
24x2W	OSRAM/CREE	Single	IK05	3750lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x14W	CREE COB	Single	IK05	4950lm	24 VDC/220-240VAC	18°/24°/38°/60°
24x2.5W	OSRAM	RGB 3in 1	IK05	1500lm	12/24 VDC/220-240VAC	25°/40°/60°
24x3.5W	OSRAM	RGBW 4in 1	IK05	2000lm	12/24 VDC/220-240VAC	25°/40°/60°

ASP3260R

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
18x4W	CREE	Single	IK05	4500lm	12/24 VDC/220-240VAC	3°/8°
36x2W	OSRAM/CREE	Single	IK05	4900lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x18W	CREE COB	Single	IK05	6400lm	24 VDC/220-240VAC	18°/24°/38°/60°
36x3W	OSRAM	RGB 3in 1	IK05	2700lm	12/24 VDC/220-240VAC	25°/40°/60°
36x4W	OSRAM	RGBW 4in 1	IK05	3420lm	12/24 VDC/220-240VAC	25°/40°/60°





LED Landscape Spot Light
-- Series LS

< Tree Strap

LED Landscape Spot Light -- Series LS


CE ENEC IP66 RoHS 1-10V Triac PWM DALI DMX RGB RGBW

ASP3170S





Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x4W	CREE	Single	IK05	1320lm	12/24 VDC/220-240VAC	3°/8°
12x2W	OSRAM/CREE	Single	IK05	1920lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
2x12W	CREE COB	Single	IK05	2400lm	24 VDC/220-240VAC	18°/24°/38°/60°
12x2.5W	OSRAM	RGB 3in 1	IK05	1160lm	12/24 VDC/220-240VAC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in 1	IK05	1400lm	12/24 VDC/220-240VAC	25°/40°/60°

ASP3170S




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x4W	CREE	Single	IK05	1320lm	12/24 VDC/220-240VAC	3°/8°
12x2W	OSRAM/CREE	Single	IK05	1920lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
2x12W	CREE COB	Single	IK05	2400lm	24 VDC/220-240VAC	18°/24°/38°/60°
12x2.5W	OSRAM	RGB 3in 1	IK05	1160lm	12/24 VDC/220-240VAC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in 1	IK05	1400lm	12/24 VDC/220-240VAC	25°/40°/60°

ASP3210S





Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x3.5W	CREE	Single	IK05	2400lm	12/24 VDC/220-240VAC	3°/8°
24x2W	OSRAM/CREE	Single	IK05	3200lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x10W	CREE COB	Single	IK05	3600lm	24 VDC/220-240VAC	18°/24°/38°/60°
24x2.5W	OSRAM	RGB 3in 1	IK05	2280lm	12/24 VDC/220-240VAC	25°/40°/60°
24x3W	OSRAM	RGBW 4in 1	IK05	2700lm	12/24 VDC/220-240VAC	25°/40°/60°

ASP3210S




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x3.5W	CREE	Single	IK05	2400lm	12/24 VDC/220-240VAC	3°/8°
24x2W	OSRAM/CREE	Single	IK05	3200lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x10W	CREE COB	Single	IK05	3600lm	24 VDC/220-240VAC	18°/24°/38°/60°
24x2.5W	OSRAM	RGB 3in 1	IK05	2280lm	12/24 VDC/220-240VAC	25°/40°/60°
24x3W	OSRAM	RGBW 4in 1	IK05	2700lm	12/24 VDC/220-240VAC	25°/40°/60°

ASP3260S



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
18x3W	CREE	Single	IK05	1320lm	12/24 VDC/220-240VAC	3°/8°
36x1.5W	OSRAM/CREE	Single	IK05	1920lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x13W	CREE COB	Single	IK05	2400lm	24 VDC/220-240VAC	18°/24°/38°/60°
36x2W	OSRAM	RGB 3in 1	IK05	1160lm	12/24 VDC/220-240VAC	25°/40°/60°
36x3W	OSRAM	RGBW 4in 1	IK05	1400lm	12/24 VDC/220-240VAC	25°/40°/60°

ASP3260S





Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
18x3W	CREE	Single	IK05	1320lm	12/24 VDC/220-240VAC	3°/8°
36x1.5W	OSRAM/CREE	Single	IK05	1920lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x13W	CREE COB	Single	IK05	2400lm	24 VDC/220-240VAC	18°/24°/38°/60°
36x2W	OSRAM	RGB 3in 1	IK05	1160lm	12/24 VDC/220-240VAC	25°/40°/60°
36x3W	OSRAM	RGBW 4in 1	IK05	1400lm	12/24 VDC/220-240VAC	25°/40°/60°

LED Landscape Spot Light -- Series LS

CE ErP IP66 RoHS 1-10V Triac PWM DALI DMX RGB RGBW


ASP3170S

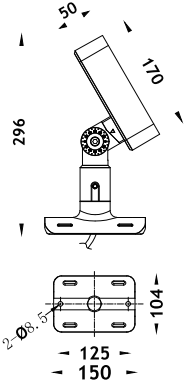




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x4W	CREE	Single	IK05	1320lm	12/24 VDC/220-240VAC	3°/8°
12x2W	OSRAM/CREE	Single	IK05	1920lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
2x12W	CREE COB	Single	IK05	2400lm	24 VDC/220-240VAC	18°/24°/38°/60°
12x2.5W	OSRAM	RGB 3in 1	IK05	1160lm	12/24 VDC/220-240VAC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in 1	IK05	1400lm	12/24 VDC/220-240VAC	25°/40°/60°


ASP3170S






Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x4W	CREE	Single	IK05	1320lm	12/24 VDC/220-240VAC	3°/8°
12x2W	OSRAM/CREE	Single	IK05	1920lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
2x12W	CREE COB	Single	IK05	2400lm	24 VDC/220-240VAC	18°/24°/38°/60°
12x2.5W	OSRAM	RGB 3in 1	IK05	1160lm	12/24 VDC/220-240VAC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in 1	IK05	1400lm	12/24 VDC/220-240VAC	25°/40°/60°


ASP3210S

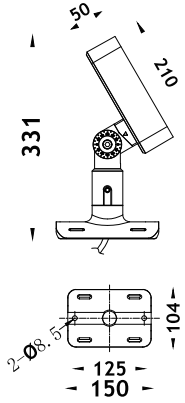




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x3.5W	CREE	Single	IK05	2400lm	12/24 VDC/220-240VAC	3°/8°
24x2W	OSRAM/CREE	Single	IK05	3200lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x10W	CREE COB	Single	IK05	3600lm	24 VDC/220-240VAC	18°/24°/38°/60°
24x2.5W	OSRAM	RGB 3in 1	IK05	2280lm	12/24 VDC/220-240VAC	25°/40°/60°
24x3W	OSRAM	RGBW 4in 1	IK05	2700lm	12/24 VDC/220-240VAC	25°/40°/60°


ASP3210S






Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x3.5W	CREE	Single	IK05	2400lm	12/24 VDC/220-240VAC	3°/8°
24x2W	OSRAM/CREE	Single	IK05	3200lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x10W	CREE COB	Single	IK05	3600lm	24 VDC/220-240VAC	18°/24°/38°/60°
24x2.5W	OSRAM	RGB 3in 1	IK05	2280lm	12/24 VDC/220-240VAC	25°/40°/60°
24x3W	OSRAM	RGBW 4in 1	IK05	2700lm	12/24 VDC/220-240VAC	25°/40°/60°


ASP3260S

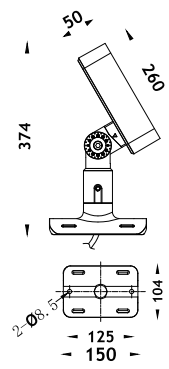




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
18x3W	CREE	Single	IK05	1320lm	12/24 VDC/220-240VAC	3°/8°
36x1.5W	OSRAM/CREE	Single	IK05	1920lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x13W	CREE COB	Single	IK05	2400lm	24 VDC/220-240VAC	18°/24°/38°/60°
36x2W	OSRAM	RGB 3in 1	IK05	1160lm	12/24 VDC/220-240VAC	25°/40°/60°
36x3W	OSRAM	RGBW 4in 1	IK05	1400lm	12/24 VDC/220-240VAC	25°/40°/60°

ASP3260S





Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
18x3W	CREE	Single	IK05	1320lm	12/24 VDC/220-240VAC	3°/8°
36x1.5W	OSRAM/CREE	Single	IK05	1920lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x13W	CREE COB	Single	IK05	2400lm	24 VDC/220-240VAC	18°/24°/38°/60°
36x2W	OSRAM	RGB 3in 1	IK05	1160lm	12/24 VDC/220-240VAC	25°/40°/60°
36x3W	OSRAM	RGBW 4in 1	IK05	1400lm	12/24 VDC/220-240VAC	25°/40°/60°

LED Landscape Spot Light -- Series TW

CE

ErP

IP66

RoHS

1-10V

Triac

PWM

DALI

DMX

RGB

RGBW




Technical drawing of ASP3170S showing dimensions: 247mm height, 50mm width, 110mm depth, 282mm height, 50mm width, 110mm depth, 300/500/800/1000mm height, 95mm width, 4-Ø8.5X20mm mounting holes, Ø120mm base.

ASP3170S

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x4W	CREE	Single	IK05	1320lm	12/24 VDC/220-240VAC	3°/8°
12x2W	OSRAM/CREE	Single	IK05	1920lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
2x12W	CREE COB	Single	IK05	2400lm	24 VDC/220-240VAC	18°/24°/38°/60°
12x2.5W	OSRAM	RGB 3in 1	IK05	1160lm	12/24 VDC/220-240VAC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in 1	IK05	1400lm	12/24 VDC/220-240VAC	25°/40°/60°

ASP3210S

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x3.5W	CREE	Single	IK05	2400lm	12/24 VDC/220-240VAC	3°/8°
24x2W	OSRAM/CREE	Single	IK05	3200lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x10W	CREE COB	Single	IK05	3600lm	24 VDC/220-240VAC	18°/24°/38°/60°
24x2.5W	OSRAM	RGB 3in 1	IK05	2280lm	12/24 VDC/220-240VAC	25°/40°/60°
24x3W	OSRAM	RGBW 4in 1	IK05	2700lm	12/24 VDC/220-240VAC	25°/40°/60°

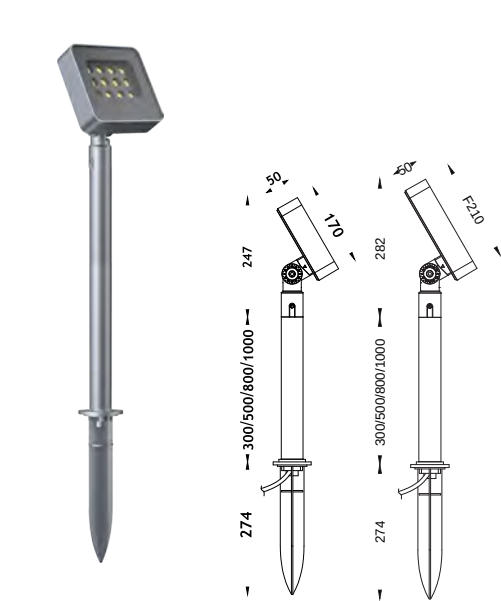

Technical drawing of ASP3170S showing dimensions: 247mm height, 50mm width, 110mm depth, 282mm height, 50mm width, 110mm depth, 300/500/800/1000mm height, 95mm width, 4-Ø8.5X20mm mounting holes, Ø120mm base.

ASP3170S

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x4W	CREE	Single	IK05	1320lm	12/24 VDC/220-240VAC	3°/8°
12x2W	OSRAM/CREE	Single	IK05	1920lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
2x12W	CREE COB	Single	IK05	2400lm	24 VDC/220-240VAC	18°/24°/38°/60°
12x2.5W	OSRAM	RGB 3in 1	IK05	1160lm	12/24 VDC/220-240VAC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in 1	IK05	1400lm	12/24 VDC/220-240VAC	25°/40°/60°

ASP3210S


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x3.5W	CREE	Single	IK05	2400lm	12/24 VDC/220-240VAC	3°/8°
24x2W	OSRAM/CREE	Single	IK05	3200lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x10W	CREE COB	Single	IK05	3600lm	24 VDC/220-240VAC	18°/24°/38°/60°
24x2.5W	OSRAM	RGB 3in 1	IK05	2280lm	12/24 VDC/220-240VAC	25°/40°/60°
24x3W	OSRAM	RGBW 4in 1	IK05	2700lm	12/24 VDC/220-240VAC	25°/40°/60°



Technical drawing of ASP3260S showing dimensions: 325mm height, 50mm width, 260mm depth, 300/500/800/1000mm height, 95mm width, 4-Ø8.5X20mm mounting holes, Ø120mm base.

ASP3260S

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
18x3W	CREE	Single	IK05	1320lm	12/24 VDC/220-240VAC	3°/8°
36x1.5W	OSRAM/CREE	Single	IK05	1920lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x13W	CREE COB	Single	IK05	2400lm	24 VDC/220-240VAC	18°/24°/38°/60°
36x2W	OSRAM	RGB 3in 1	IK05	1160lm	12/24 VDC/220-240VAC	25°/40°/60°
36x3W	OSRAM	RGBW 4in 1	IK05	1400lm	12/24 VDC/220-240VAC	25°/40°/60°

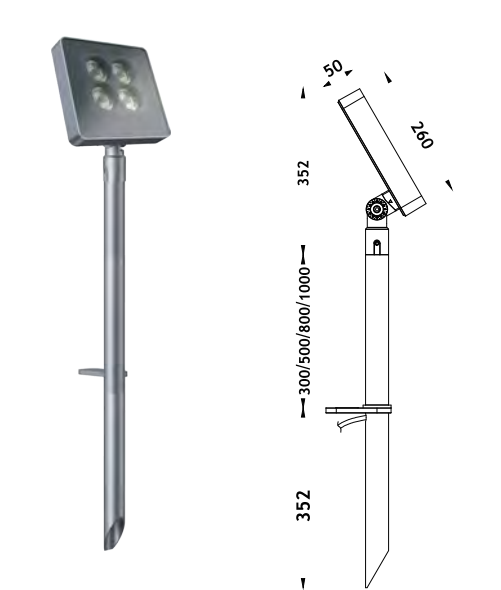

Technical drawing of ASP3260S showing dimensions: 352mm height, 50mm width, 260mm depth, 300/500/800/1000mm height, 95mm width, 4-Ø8.5X20mm mounting holes, Ø120mm base.


ASP3260S

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
18x3W	CREE	Single	IK05	1320lm	12/24 VDC/220-240VAC	3°/8°
36x1.5W	OSRAM/CREE	Single	IK05	1920lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°60°/20°55°
4x13W	CREE COB	Single	IK05	2400lm	24 VDC/220-240VAC	18°/24°/38°/60°
36x2W	OSRAM	RGB 3in 1	IK05	1160lm	12/24 VDC/220-240VAC	25°/40°/60°
36x3W	OSRAM	RGBW 4in 1	IK05	1400lm	12/24 VDC/220-240VAC	25°/40°/60°


LED Landscape Spot Light

CE ErP IP65 RoHS 1-10V Triac PWM DALI DMX RGB RGBW


ASP3115R

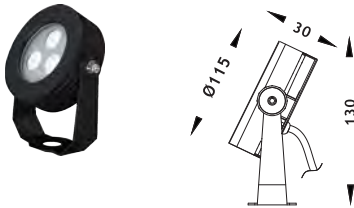


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x2W	OSRAM/CREE	Single	IK08	400lm	12/24 VDC/220-240VAC	12°/25°/40°/60°
1x6W	CREE COB	Single	IK08	480lm	12/24 VDC/220-240VAC	18°/24°/38°/60°




ASP3075R

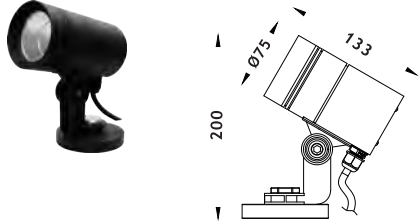


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x13W	CREE	Single	IK04	1040lm	12/24 VDC/220-240VAC	18°/24°/38°/60°




ASP3115R

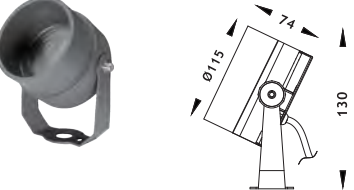


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x2W	OSRAM/CREE	Single	IK08	400lm	12/24 VDC/220-240VAC	12°/25°/40°/60°
1x6W	CREE COB	Single	IK08	480lm	12/24 VDC/220-240VAC	18°/24°/38°/60°




ASP3075R

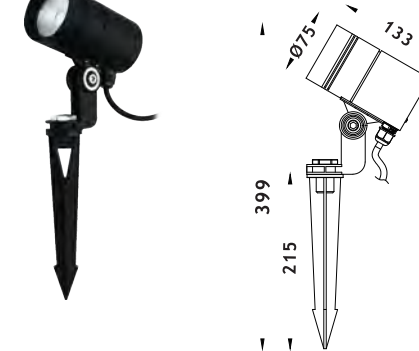


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x13W	CREE	Single	IK04	1040lm	12/24 VDC/220-240VAC	18°/24°/38°/60°




ASP3173R

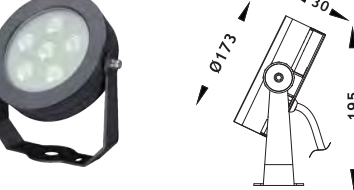


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W	OSRAM/CREE	Single	IK09	840lm	12/24 VDC/220-240VAC	12°/25°/40°/60°
1x12W	CREE COB	Single	IK09	960lm	12/24 VDC/220-240VAC	18°/24°/38°/60°
9x1.5W	OSRAM	Single	IK09	870lm	12/24 VDC/220-240VAC	25°/40°/60°



ASP3173R

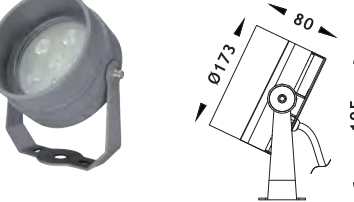

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W	OSRAM/CREE	Single	IK09	840lm	12/24 VDC/220-240VAC	12°/25°/40°/60°
1x12W	CREE COB	Single	IK09	960lm	12/24 VDC/220-240VAC	18°/24°/38°/60°
9x1.5W	OSRAM	Single	IK09	870lm	12/24 VDC/220-240VAC	25°/40°/60°







LED Landscape Spot Light




ASP3102R

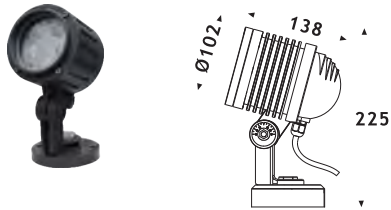


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W	OSRAM/CREE	Single	IK04	780lm	12/24 VDC/220-240VAC	8°/15°/25°/40°/60°
1x12W	CREE COB	Single	IK04	960lm	12/24 VDC/220-240VAC	25°/40°/60°
5x3W	OSRAM	RGB 3in1	IK04	300lm	12/24 VDC	25°/40°/60°




ASP3102R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W	OSRAM/CREE	Single	IK04	780lm	12/24 VDC/220-240VAC	8°/15°/25°/40°/60°
1x12W	CREE COB	Single	IK04	960lm	12/24 VDC/220-240VAC	25°/40°/60°
5x3W	OSRAM	RGB 3in1	IK04	300lm	12/24 VDC	25°/40°/60°




ASP3102R

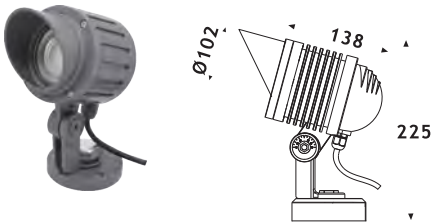


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W	OSRAM/CREE	Single	IK04	780lm	12/24 VDC/220-240VAC	8°/15°/25°/40°/60°
1x12W	CREE COB	Single	IK04	960lm	12/24 VDC/220-240VAC	25°/40°/60°
5x3W	OSRAM	RGB 3in1	IK04	300lm	12/24 VDC	25°/40°/60°




ASP3102R

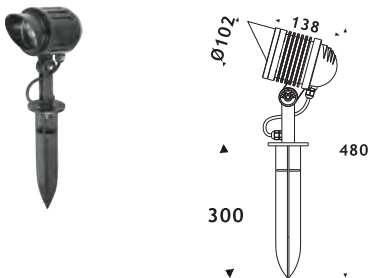


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W	OSRAM/CREE	Single	IK04	780lm	12/24 VDC/220-240VAC	8°/15°/25°/40°/60°
1x12W	CREE COB	Single	IK04	960lm	12/24 VDC/220-240VAC	25°/40°/60°
5x3W	OSRAM	RGB 3in1	IK04	300lm	12/24 VDC	25°/40°/60°




ASP3100R

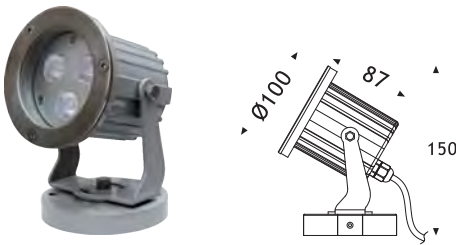


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x2W	OSRAM/CREE	Single	IK04	390lm	12/24 VDC/220-240VAC	15°/25°/40°
1x6W	CREE COB	Single	IK04	480lm	12/24 VDC/220-240VAC	25°/40°/60°



ASP3100R

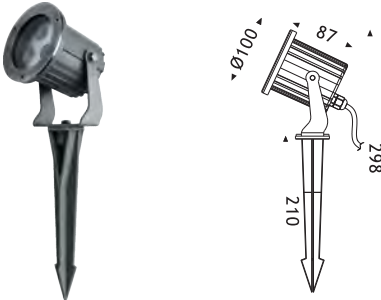

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x2W	OSRAM/CREE	Single	IK04	390lm	12/24 VDC/220-240VAC	15°/25°/40°
1x6W	CREE COB	Single	IK04	480lm	12/24 VDC/220-240VAC	25°/40°/60°



LED Wall Light

Led Wall luminaires stands out for special housing design and high quality optical components specifically for demanding visual tasks to provide enhanced visual comfort.

Housing made of 12# Die-casting aluminum with Akzo powder coated. Clear tempered safety glass, transmittance efficiency is over 95% and the accuracy of color temperature as well as strong impact resistance bearing capacity.





One-way >

LED Wall Light

LED Wall Light

Quick & simple installation with low maintenance. Sturdy construction in order to maintain performance of the luminaire and to reduce maintenance costs. Applicable for outdoor installation, hotel,vila,facade, residential.




LED Wall Light



Sturdy construction in order to maintain performance of the luminaire and to reduce maintenance costs.

Applicable for outdoor installation, hotel, villa, facade, residential. Quick & simple installation with low maintenance.

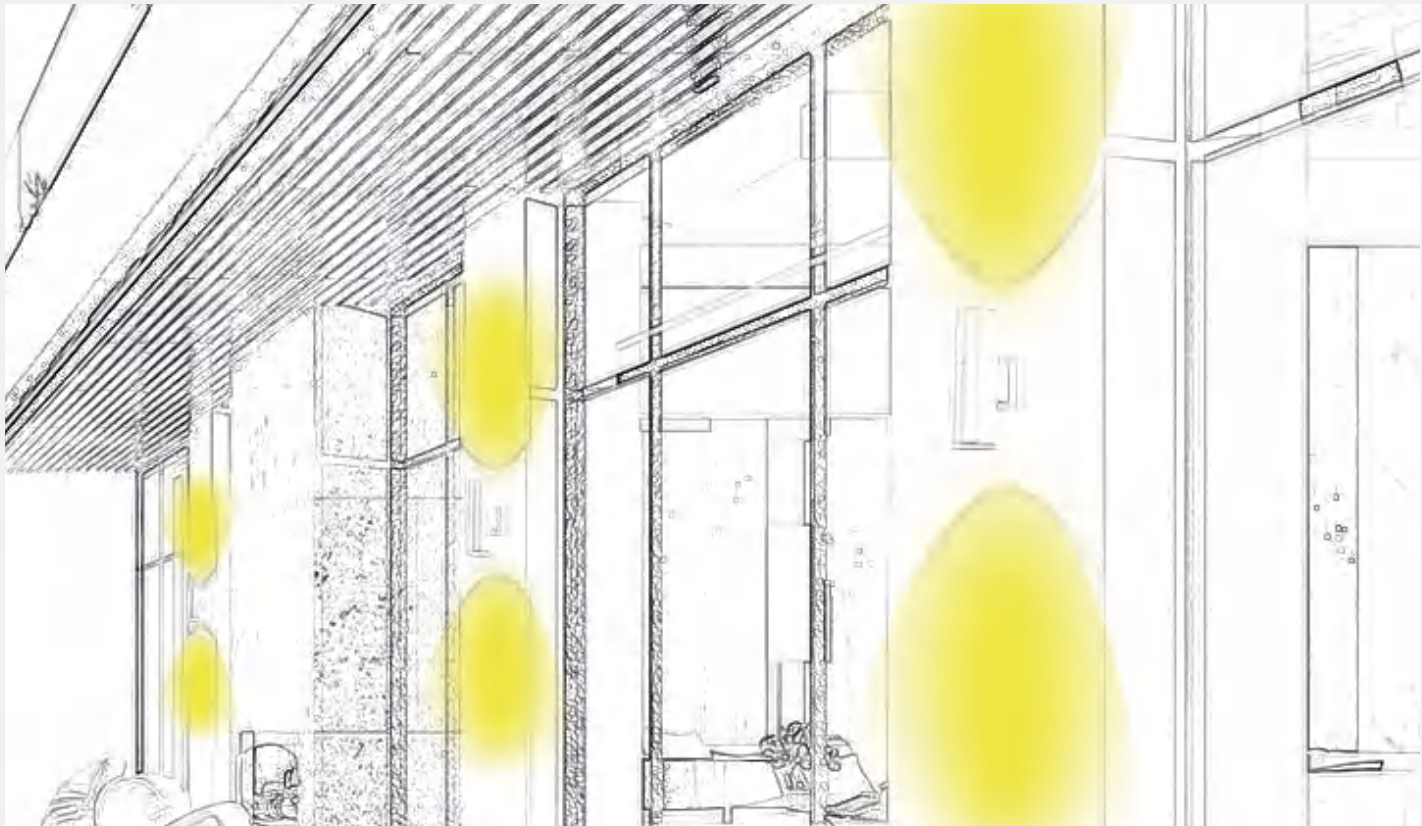

Material Quality
12# Die-casting powder coated aluminum housing
Tempered glass.



LED
CREE/OSRAM/BRIDGELUX, CRI>80(CRI>90 on request)
Cable 0.5m



Quality/Supporting
IP65 IK08
Life time ≥50000 hrs
Operating temperature -20 C ~40 C




LED Wall Light




LED Wall Light




AWS1050R1A




Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	1x5W	CREE COB	Single	IK05	408lm	12/24 VDC/220-240VAC	10°
Black	1x5W	CREE COB	Single	IK05	408lm	12/24 VDC/220-240VAC	18°/22°/31°/58°
Customized							




AWS1050R1B




Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	2x4W	CREE COB	Single	IK05	2*408lm	12/24 VDC/220-240VAC	10°
Black	2x4W	CREE COB	Single	IK05	2*408lm	12/24 VDC/220-240VAC	18°/22°/31°/58°
Customized							




AWS1060R1A



Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	1x10W	CREE COB	Single	IK05	1180lm	12/24 VDC/220-240VAC	10°
Black	1x10W	CREE COB	Single	IK05	1180lm	12/24 VDC/220-240VAC	18°/22°/31°/58°
Customized							




AWS1060R1B




Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	2x8W	CREE COB	Single	IK05	2*837lm	12/24 VDC/220-240VAC	10°
Black	2x8W	CREE COB	Single	IK05	2*837lm	12/24 VDC/220-240VAC	18°/22°/31°/58°
Customized							




AWS1075R1A



Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	1x15W	CREE COB	Single	IK05	1412lm	12/24 VDC/220-240VAC	10°
Black	1x15W	CREE COB	Single	IK05	1412lm	12/24 VDC/220-240VAC	18°/22°/31°/58°
Customized							




AWS1075R1B




Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	2x13W	CREE COB	Single	IK05	2*1082lm	12/24 VDC/220-240VAC	3°/8°
Black	2x13W	CREE COB	Single	IK05	2*1082lm	12/24 VDC/220-240VAC	18°/22°/31°/58°
Customized							




AWS1100R1A



Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	1x20W	CREE COB	Single	IK05	2121lm	12/24 VDC/220-240VAC	10°
Black	1x20W	CREE COB	Single	IK05	2121lm	12/24 VDC/220-240VAC	18°/22°/31°/58°
Customized							



AWS1100R1B




Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	2x18W	CREE COB	Single	IK05	2*1788lm	12/24 VDC/220-240VAC	10°
Black	2x18W	CREE COB	Single	IK05	2*1788lm	12/24 VDC/220-240VAC	18°/25°/37°/61°
Customized							



LED Wall Light

CE ErP IP65 RoHS 1-10V Triac PWM DALI DMX RGB RGBW

AWS1130R1A




White


Black

Customized

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x35W	CREE COB	Single	IK05	2905lm	12/24 VDC/220-240VAC	10°
1x35W	CREE COB	Single	IK05	2905lm	12/24 VDC/220-240VAC	18°/22°/30°/60°
6x4W	OSRAM SMD	RGB 3in 1	IK05	600lm	12/24 VDC	10°/20°/30°/60°
6x4W	OSRAM SMD	RGBW 4in 1	IK05	600lm	12/24 VDC	10°/20°/30°/60°



AWS1130R1B




White

Black

Customized

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
2x35W	CREE COB	Single	IK05	2°2905lm	12/24 VDC/220-240VAC	10°
2x35W	CREE COB	Single	IK05	2°2905lm	12/24 VDC/220-240VAC	18°/22°/30°/60°
2x(6x4W)	OSRAM SMD	RGB 3in 1	IK05	2°600lm	12/24 VDC	10°/20°/30°/60°
2x(6x4W)	OSRAM SMD	RGBW 4in 1	IK05	2°600lm	12/24 VDC	10°/20°/30°/60°







LED Wall Light

LED Wall Light



CE ErP IP65 RoHS 1-10V Triac PWM DALI 12V RGB RGBW

AWS1050S1A





Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	1x5W	CREE COB	Single	IK05	408lm	12/24 VDC/220-240VAC	10°
Black	1x5W	CREE COB	Single	IK05	408lm	12/24 VDC/220-240VAC	18°/22°/30°/60°
Customized							

AWS1050S1B





Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	2x4W	CREE COB	Single	IK05	2*408lm	12/24 VDC/220-240VAC	10°
Black	2x4W	CREE COB	Single	IK05	2*408lm	12/24 VDC/220-240VAC	18°/22°/30°/60°
Customized							

AWS1060S1A





Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	1x10W	CREE COB	Single	IK05	1180lm	12/24 VDC/220-240VAC	10°
Black	1x10W	CREE COB	Single	IK05	1180lm	12/24 VDC/220-240VAC	18°/22°/30°/60°
Customized							

AWS1060S1B





Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	2x8W	CREE COB	Single	IK05	2*837lm	12/24 VDC/220-240VAC	10°
Black	2x8W	CREE COB	Single	IK05	2*837lm	12/24 VDC/220-240VAC	18°/22°/30°/60°
Customized							

AWS1075S1A

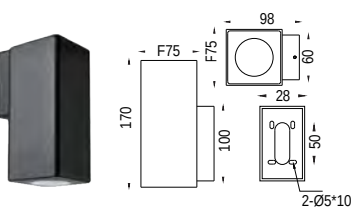



Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	1x15W	CREE COB	Single	IK05	1412lm	12/24 VDC/220-240VAC	10°
Black	1x15W	CREE COB	Single	IK05	1412lm	12/24 VDC/220-240VAC	18°/22°/30°/60°
Customized							

AWS1075S1B

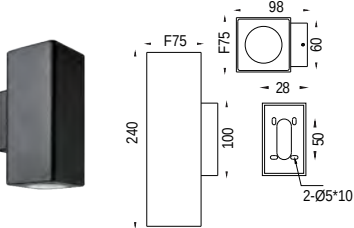



Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	2x13W	CREE COB	Single	IK05	2*1082lm	12/24 VDC/220-240VAC	3°/8°
Black	2x13W	CREE COB	Single	IK05	2*1082lm	12/24 VDC/220-240VAC	18°/22°/30°/60°
Customized							

AWS1100S1A

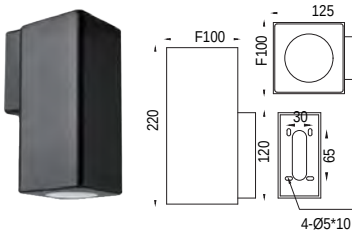

Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	1x20W	CREE COB	Single	IK05	2121lm	12/24 VDC/220-240VAC	10°
Black	1x20W	CREE COB	Single	IK05	2121lm	12/24 VDC/220-240VAC	18°/22°/30°/60°
Customized							


AWS1100S1B




Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	2x18W	CREE COB	Single	IK05	2*1788lm	12/24 VDC/220-240VAC	10°
Black	2x18W	CREE COB	Single	IK05	2*1788lm	12/24 VDC/220-240VAC	18°/22°/30°/60°
Customized							

LED Step Light


AWS1063L2-0.195M

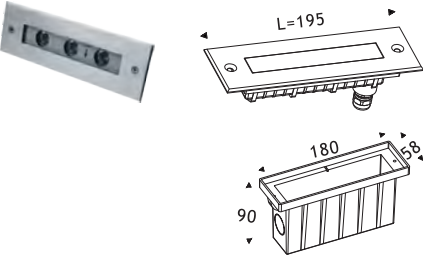


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3X2W	CREE/OSRAM	Single	IK08	400lm	12/24 VDC/220-240VAC	10°/25°/40°/60°/45°35°
3X2.5W	CREE/OSRAM	RGB 3in 1	IK08	180lm	12/24 VDC	25°/40°/60°/45°35°
3X3.5W	CREE/OSRAM	RGBW 4in 1	IK08	260lm	12/24 VDC	25°/40°/60°/45°35°




AWS1063L2-0.328M

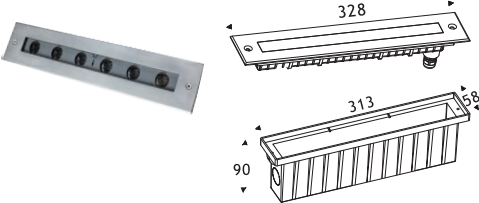


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W	CREE/OSRAM	Single	IK08	798lm	12/24 VDC/220-240VAC	10°/25°/40°/60°/45°35°
6x2.5W	CREE/OSRAM	RGB 3in 1	IK08	375lm	12/24 VDC	25°/40°/60°/45°35°
6x3.5W	CREE/OSRAM	RGBW 4in 1	IK08	520lm	12/24 VDC	25°/40°/60°/45°35°




AWS1063L4-0.195M

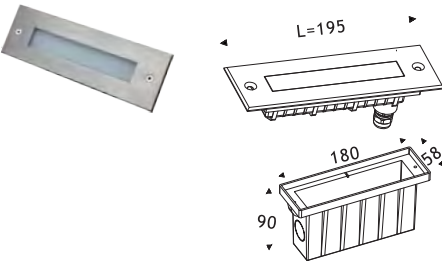


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
2.2W	OSRAM	Single	IK08	25lm	12/24 VDC/220-240VAC	120°
2.2W	OSRAM	RGB 3in 1	IK08	25lm	12/24 VDC	120°



AWS1063L4-0.328M

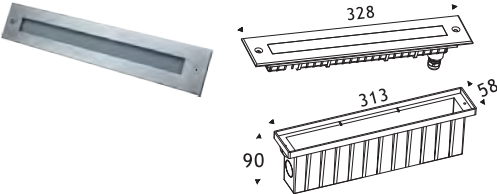


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
4.8W	CREE/OSRAM	Single	IK08	50lm	12/24 VDC/220-240VAC	120°
4.8W	CREE/OSRAM	RGB 3in 1	IK08	25lm	12/24 VDC	120°






LED Recessed Step Light




AWR1171L5



Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	2.4W	OSRAM	Single	IK05	47lm	12/24 VDC/220-240VAC	120°
Black	6W	OSRAM	Single	IK05	132lm	12/24 VDC/220-240VAC	120°
Silver							
Customized							




AWR1045L5



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1.2W	OSRAM	Single	IK05	40lm	12/24 VDC/220-240VAC	120°




AWR1106S5



Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	1.4W	OSRAM	Single	IK05	35lm	12/24 VDC/220-240VAC	120°
Black	3W	OSRAM	Single	IK05	55lm	12/24 VDC/220-240VAC	120°
Silver							
Customized							




AWR1095R5Y

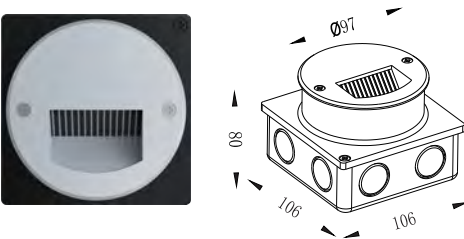

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1.2W	OSRAM	Single	IK05	40lm	12/24 VDC/220-240VAC	120°




AWR1120S5



Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	1.6W	OSRAM	Single	IK05	35lm	12/24 VDC/220-240VAC	120°
Black	3W	OSRAM	Single	IK05	132lm	12/24 VDC/220-240VAC	120°
Silver							
Customized							




AWR1095S5

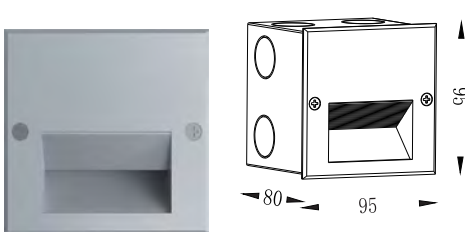

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1.4W	OSRAM	Single	IK05	40lm	12/24 VDC/220-240VAC	120°



AWR1160S5




Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	3W	OSRAM	Single	IK05	75lm	12/24 VDC/220-240VAC	120°
Black	6W	OSRAM	Single	IK05	220lm	12/24 VDC/220-240VAC	120°
Silver							
Customized							



LED Recessed Step Light

CE ERP IP65 RoHS 1-10V Triac PWM DALI 12V RGB RGBW

AWR1078R5A

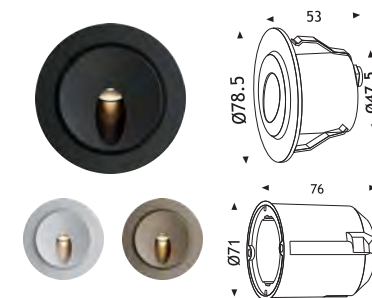

Color


White

Black

Golden

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x2W	CREE	Single	IK05	60lm	12/24 VDC/220-240VAC	80°


AWR1078R1B

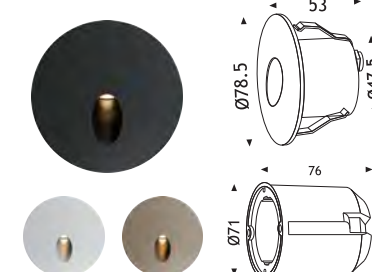

Color

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x2W	CREE	Single	IK05	60lm	12/24 VDC/220-240VAC	80°

AWR1078S1A

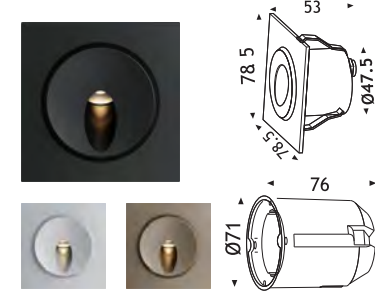

Color


White

Black

Golden

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x2W	CREE	Single	IK05	60lm	12/24 VDC/220-240VAC	80°

AWR1078S1B

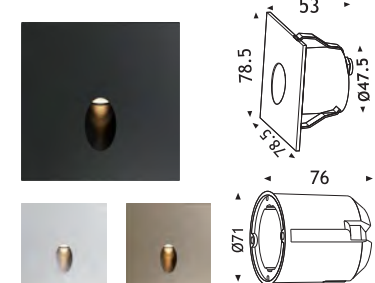

Color

White

Black

Golden

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x2W	CREE	Single	IK05	60lm	12/24 VDC/220-240VAC	80°

BLACK




WHITE




GOLDEN



LED Window Light




AWL1062R1A

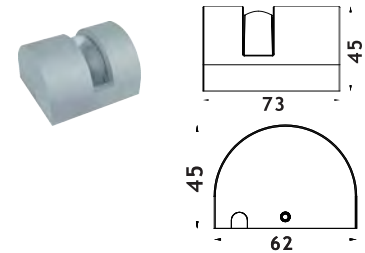


Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	1x3W	OSRAM/CREE	Single	IK05	171lm	12/24 VDC/220-240VAC	3°/180°
Black	3x2W	OSRAM/CREE	Single	IK05	321lm	12/24 VDC/220-240VAC	3°/180°
Customized							




AWL1130R1A

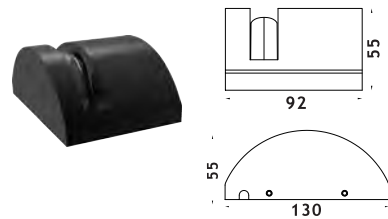

Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	6x2W	OSRAM	Single	IK05	660lm	12/24 VDC/220-240VAC	3°/180°
Black							
Customized							

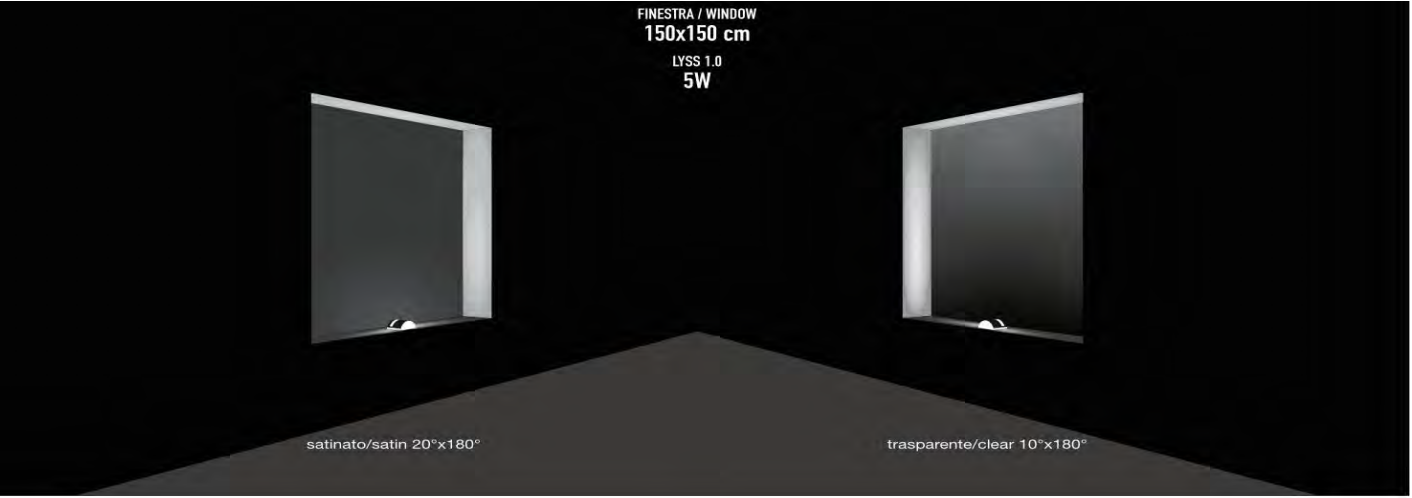


AWL1060S1-2WAY

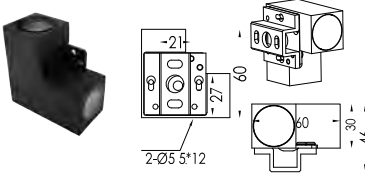


Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	2x2W	OSRAM	Single	IK05	280lm	12/24 VDC/220-240VAC	15°/25°
Black							
Customized							



AWL1090S1-3WAY

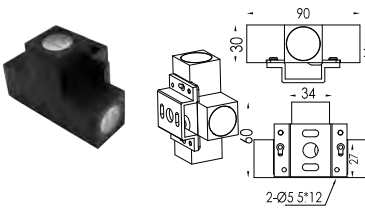


Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	3x2W	OSRAM	Single	IK05	400lm	12/24 VDC/220-240VAC	15°/25°
Black							
Customized							

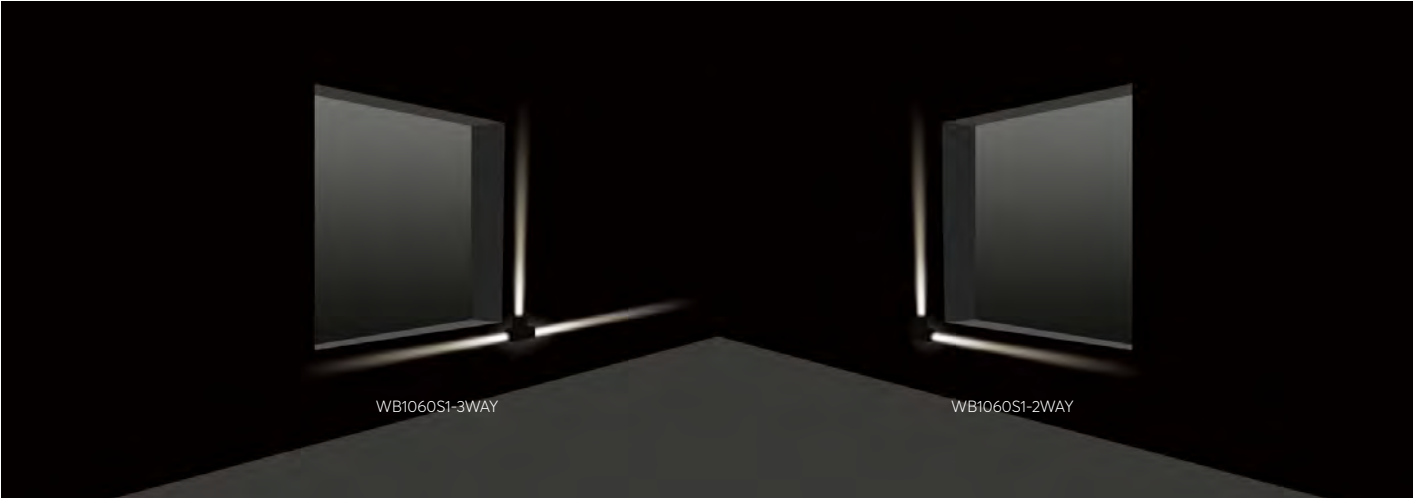


LED Handrail Light

CE ErP IP67 RoHS 1-10V Triac PWM DALI 50/60Hz


AHL1030R1A




Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
Silver	1x1.5W	CREE/OSRAM	Single	IK05	120lm	12/24 VDC	15°/30°/40°/60°/90°
Customized	1x1.5W	CREE/OSRAM	Single	IK05	120lm	12/24 VDC	Asymmetric




AHL1030R1B






Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
Silver	1x1.5W	CREE/OSRAM	Single	IK05	120lm	12/24 VDC	15°/30°/40°/60°/90°
Customized	1x1.5W	CREE/OSRAM	Single	IK05	120lm	12/24 VDC	Asymmetric



AHL1041R1A



Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
Silver	1x1.5W	CREE/OSRAM	Single	IK05	120lm	12/24 VDC	15°/30°/40°/60°/90°
Customized	1x1.5W	CREE/OSRAM	Single	IK05	120lm	12/24 VDC	Asymmetric

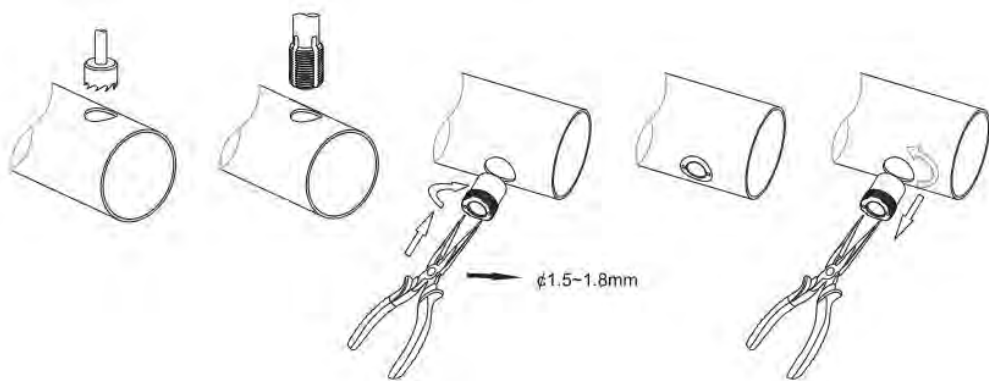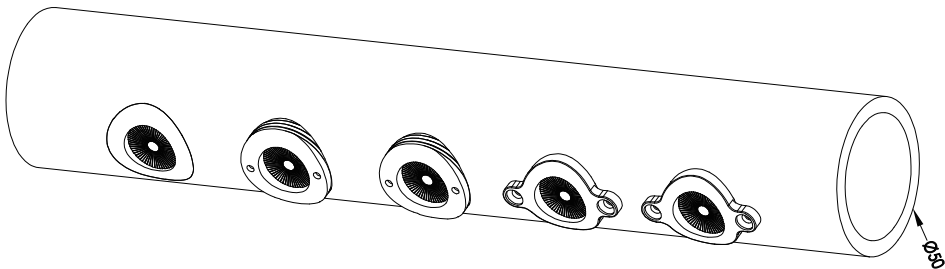

Series UR

Housing of underwater light is made of SUS 316L stainless steel, with structure water-proof design and filled with sealing glue for double water proof, reaching IP68 waterproof rate.

Recessed and Surface mounted version is available in different CCT options including RGB, creating special lighting effects.



Series UR

High efficiency LED underwater luminaire for illumination of medium and large swimming pools, water features and fountains, revealing underwater architecture.



IK08/IP68

CREE COB

LED Underwater Light





LED Underwater Light




Series UR

High efficiency LED underwater luminaire for illumination of medium and large swimming pools, water features and fountains, revealing underwater architecture.

The Series UR uses anti-glare design, achieving UGR less than 16. Clear tempered safety glass, transmittance of light is over 95%.

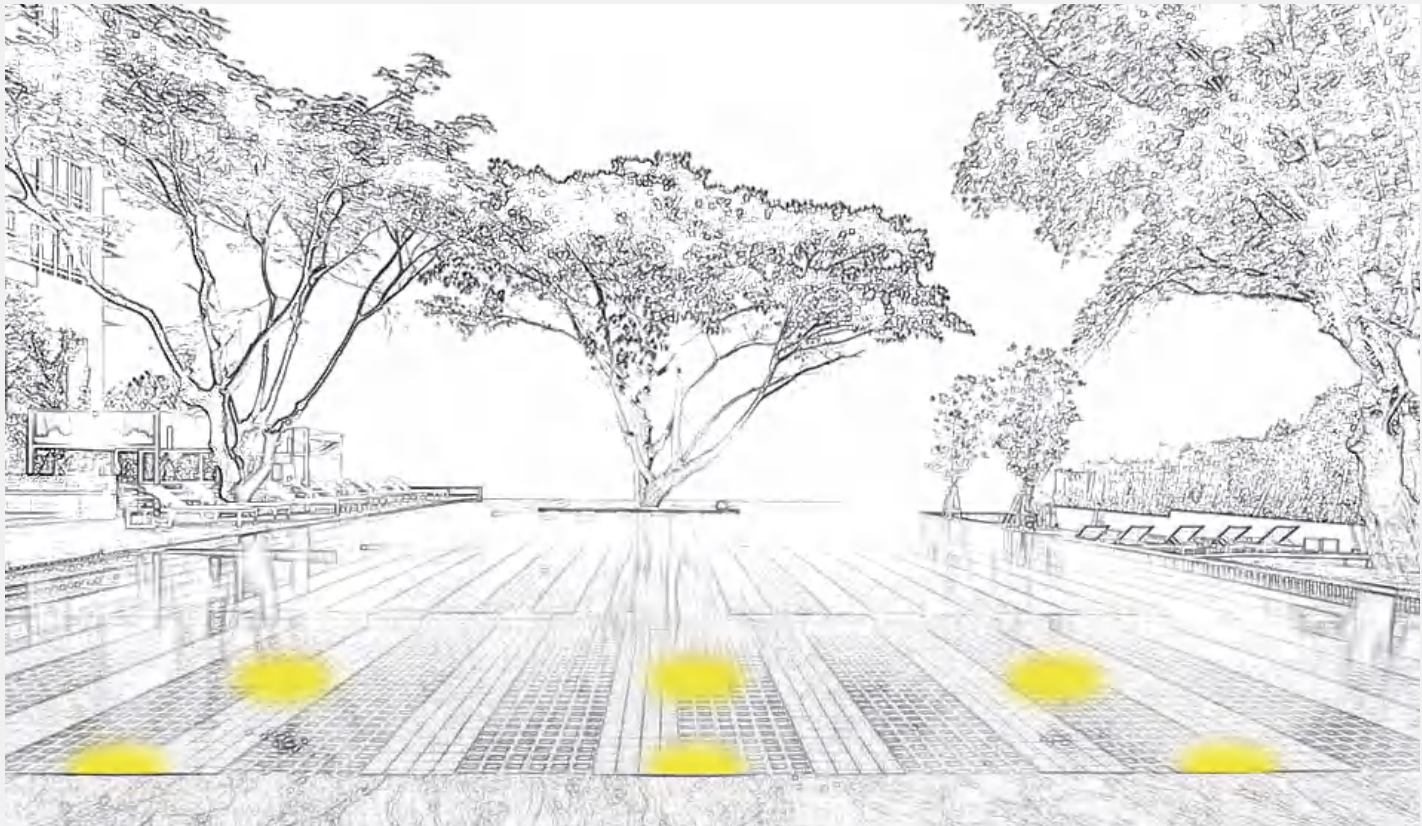

Material Quality
SUS 316L stainless steel housing
Tempered glass.



LED
CREE/OSRAM/BRIDGELUX,
CRI>80(CRI>90 on request)




Quality/Supporting
IP68 IK10
Life time ≥50000 hrs
Operating temperature -20 C ~40 C

LED Recessed Underwater Light

CE ErP IP68 RoHS 1-10V Triac PWM DALI 512 RGB RGBW


AUW4115R



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x8W	CREE COB	Single	IK08	400lm	12/24 VDC	15°/24°/36°/60°




AUW4115R

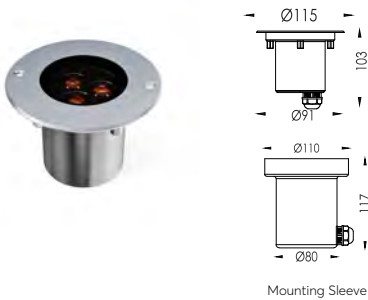

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x3W	CREE/OSRAM	Single	IK08	769lm	12/24 VDC	10°/25°/40°/60°/80°/10°45°/25°45°
3x3W	OSRAM	RGB 3in 1	IK08	200lm	12/24 VDC	12°/25°/40°/60°/12°45°
3x3W	OSRAM	RGBW 4in 1	IK08	260lm	12/24 VDC	12°/25°/40°/60°/12°45°




AUW4145R



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x18W	CREE COB	Single	IK08	1440lm	12/24 VDC	15°/24°/36°/60°




AUW4145R

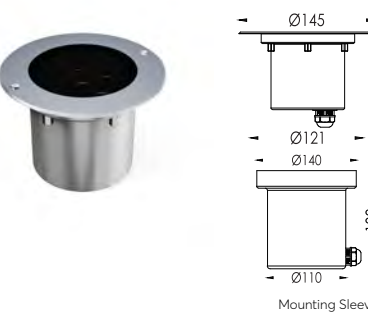

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x3W	CREE/OSRAM	Single	IK08	1440lm	12/24 VDC	10°/25°/40°/60°/80°/10°45°/25°45°
6x3W	OSRAM	RGB 3in 1	IK08	450lm	12/24 VDC	12°/25°/40°/60°/12°45°
6x3.5W	OSRAM	RGBW 4in 1	IK08	630lm	12/24 VDC	12°/25°/40°/60°/12°45°




AUW4170R

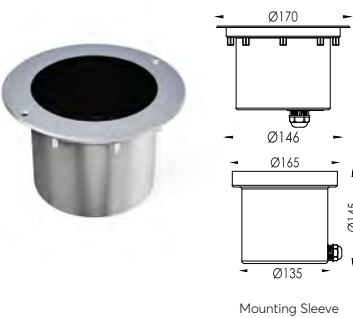

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x25W	CREE COB	Single	IK08	2000lm	12/24 VDC	15°/24°/36°/60°



AUW4170R

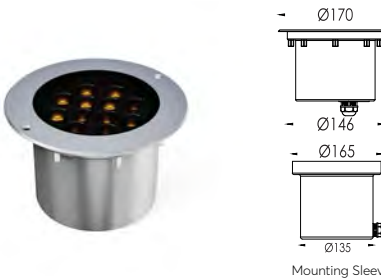

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x3W	CREE/OSRAM	Single	IK08	2800lm	12/24 VDC	10°/25°/40°/60°/80°/10°45°/25°45°
12x3W	OSRAM	RGB 3in 1	IK08	900lm	12/24 VDC	12°/25°/40°/60°/12°45°
12x3W	OSRAM	RGBW 4in 1	IK08	1260lm	12/24 VDC	12°/25°/40°/60°/12°45°




WARNING: Must be installed under the water to prevent the light from being burnt off because of over-heating


LED Recessed Underwater Light

CE ErP IP68 RoHS Compliant 1-10V Triac PWM DALI DMX12 RGB RGBW


AUW4135R/AUW4150R

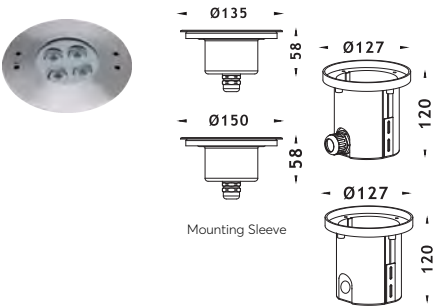

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x8W	CREE COB	Single	IK08	780lm	12/24 VDC	15°/25°/36°/60°
4x2W	CREE/OSRAM	Single	IK08	660lm	12/24 VDC	10°/25°/40°/60°/100°
4x2W	CREE/OSRAM	Single	IK08	660lm	12/24 VDC	Asy25°/45°
4x3W	OSRAM	RGB 3in 1	IK08	300lm	12/24 VDC	25°/40°/60°
4x3W	OSRAM	RGB 4in 1	IK08	420lm	12/24 VDC	25°/40°/60°



AUW4205R

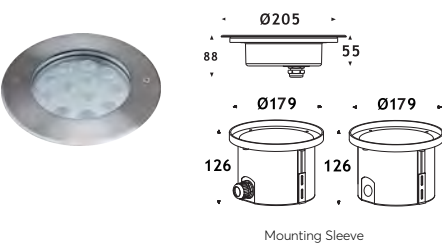

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x2W	CREE/OSRAM	Single	IK10	1920lm	12/24 VDC	10°/15°/20°/30°/60°/100°
12x2W	CREE/OSRAM	Single	IK10	1920lm	12/24 VDC	Asy25°/45°
12x3W	OSRAM	RGB 3in 1	IK10	900lm	12/24 VDC	25°/40°/60°
12x3W	OSRAM	RGB 4in 1	IK10	1260lm	12/24 VDC	25°/40°/60°




AUW4180R



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x12W	CREE COB	Single	IK08	1150lm	12/24 VDC	15°/25°/36°/60°
6x2W	CREE/OSRAM	Single	IK08	1008lm	12/24 VDC	10°/25°/40°/60°/100°
6x2W	CREE/OSRAM	Single	IK08	1008lm	12/24 VDC	Asy25°/45°
6x3W	OSRAM	RGB 3in 1	IK08	490lm	12/24 VDC	25°/40°/60°
6x3W	OSRAM	RGB 4in 1	IK08	680lm	12/24 VDC	25°/40°/60°




AUW4250R

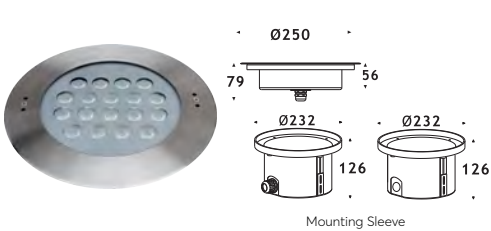

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x45W	CREE COB	Single	IK10	4500lm	12/24 VDC	15°/25°/36°/60°
18x2W	CREE/OSRAM	Single	IK10	2900lm	12/24 VDC	10°/15°/20°/30°/60°/100°
18x2W	OSRAM	Single	IK10	2900lm	12/24 VDC	Asy25°/45°
18x3W	OSRAM	RGB 3in 1	IK10	1800lm	12/24 VDC	25°/40°/60°
18x3W	OSRAM	RGB 4in 1	IK10	2500lm	12/24 VDC	25°/40°/60°




AUW4180R

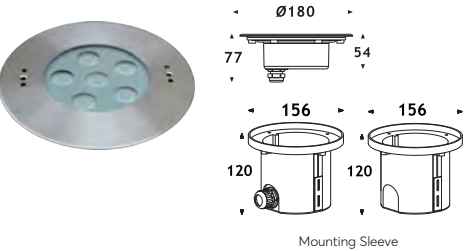

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W	CREE/OSRAM	Single	IK08	1180lm	12/24 VDC	10°/25°/40°/60°/100°
6x2W	CREE/OSRAM	Single	IK08	1180lm	12/24 VDC	Asy25°/45°
6x3W	OSRAM	RGB 3in 1	IK08	1180lm	12/24 VDC	25°/40°/60°
6x3W	OSRAM	RGB 4in 1	IK08	1180lm	12/24 VDC	25°/40°/60°



AUW4250R

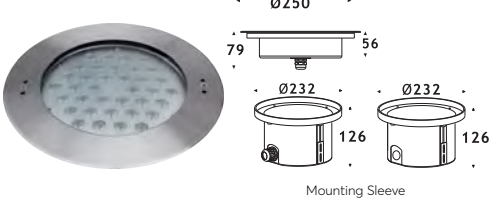

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
36x1.5W	CREE/OSRAM	Single	IK10	4320lm	12/24 VDC	10°/15°/20°/30°/60°/100°
36x1.5W	OSRAM	R.G.B	IK10	3240lm	12/24 VDC	15°/25°/40°/60°



AUW4205R



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x24W	CREE COB	Single	IK08	2300lm	12/24 VDC	15°/25°/36°/60°
12x2W	CREE/OSRAM	Single	IK08	2000lm	12/24 VDC	10°/25°/40°/60°/100°
12x2W	CREE/OSRAM	Single	IK08	2000lm	12/24 VDC	Asy25°/45°
12x3W	OSRAM	RGB 3in 1	IK08	960lm	12/24 VDC	25°/40°/60°
12x3W	OSRAM	RGB 4in 1	IK08	1350lm	12/24 VDC	25°/40°/60°




WARNING: Must be installed under the water to prevent the light from being burnt off because of over-heating


LED Recessed Underwater Light

CE ERP IP68 RoHS 1-10V Triac PWM DALI 12V RGB RGBW


AUW4038R

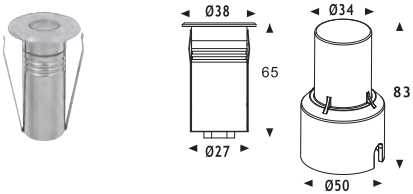

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x1.5W	CREE/OSRAM	Single	IK08	140lm	12/24 VDC	10°/25°/40°/60°




AUW4118R

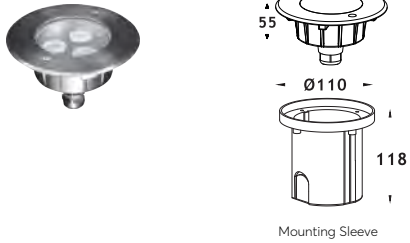


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x2W	CREE/OSRAM	Single	IK08	530lm	12/24 VDC	10°/20°/30°/60°
3x3W	OSRAM	RGB 3in 1	IK08	230lm	12/24 VDC	25°/40°/60°
3x3W	OSRAM	RGB 4in 1	IK08	320lm	12/24 VDC	25°/40°/60°



AUW4055R

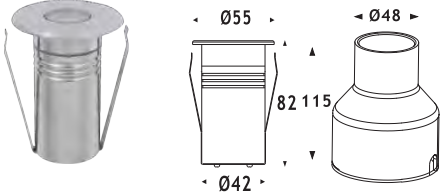

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x2W	CREE/OSRAM	Single	IK08	160lm	12/24 VDC	15°/25°/36°/60°
1x2W	CREE/OSRAM	Single	IK08	160lm	12/24 VDC	Asy25°
1x3W	OSRAM	RGB 3in 1	IK08	75lm	12/24 VDC	25°/40°/60°
1x3W	OSRAM	RGBW 4in 1	IK08	100lm	12/24 VDC	25°/40°/60°




A4162R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W	CREE/OSRAM	Single	IK08	980lm	12/24 VDC	10°/20°/30°/60°
6x3W	OSRAM	RGB 3in 1	IK08	490lm	12/24 VDC	25°/40°/60°
6x3W	OSRAM	RGB 4in 1	IK08	680lm	12/24 VDC	25°/40°/60°



AUW4068R

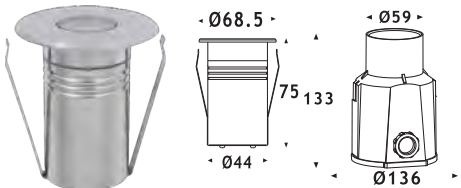


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x2W	CREE/OSRAM	Single	IK08	160lm	12/24 VDC	15°/25°/36°/60°
1x2W	CREE/OSRAM	Single	IK08	160lm	12/24 VDC	Asy25°
1x3W	OSRAM	RGB 3in 1	IK08	75lm	12/24 VDC	25°/40°/60°
1x3W	OSRAM	RGBW 4in 1	IK08	100lm	12/24 VDC	25°/40°/60°




AUW4162R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
9x1.5W	CREE/OSRAM	Single	IK08	1360lm	12/24 VDC	10°/20°/30°/60°
9x1.5W	OSRAM	3R.3G.3B	IK08	980lm	12/24 VDC	15°/25°/40°/60°
9x2W	OSRAM	RGB 3in 1	IK08	660lm	12/24 VDC	25°/40°/60°
9x2W	OSRAM	RGB 4in 1	IK08	930lm	12/24 VDC	25°/40°/60°



AUW4067R

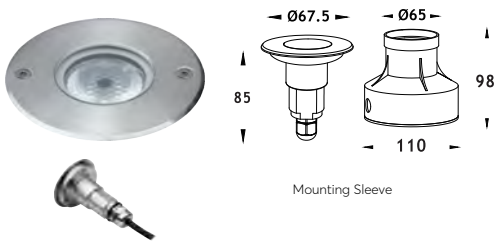

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x2W	CREE/OSRAM	Single	IK08	200lm	12/24 VDC	15°/25°/36°/60°
1x2W	CREE/OSRAM	Single	IK08	200lm	12/24 VDC	Asy25°
1x3W	OSRAM	RGB 3in 1	IK08	90lm	12/24 VDC	25°/40°/60°



AUW4185R



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x2W	CREE/OSRAM	Single	IK08	1920lm	12/24 VDC	10°/20°/30°/60°
12x3W	OSRAM	RGB 3in 1	IK08	900lm	12/24 VDC	25°/40°/60°
12x3W	OSRAM	RGB 4in 1	IK08	1260lm	12/24 VDC	25°/40°/60°
18x1.5W	OSRAM	Single	IK08	2000lm	12/24 VDC	25°/40°/60°




WARNING: Must be installed under the water to prevent the light from being burnt off because of over-heating


LED Recessed Underwater Light




AUW4063L2-0.195M

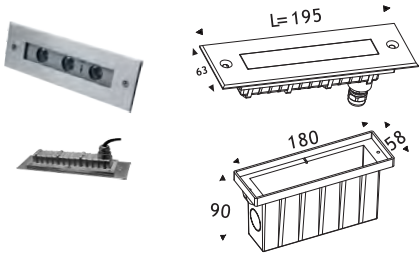


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x2W	CREE/OSRAM	Single	IK08	400lm	12/24 VDC	10°/25°/40°/60°/45°35°
3x2.5W	CREE/OSRAM	RGB 3in 1	IK08	180lm	12/24 VDC	25°/40°/60°/45°35°
3x3.5W	CREE/OSRAM	RGBW 4in 1	IK08	260lm	12/24 VDC	25°/40°/60°/45°35°




AUW5063L2-0.195M

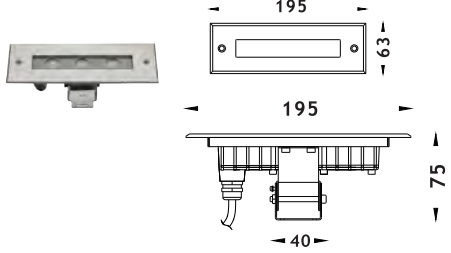


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x2W	CREE/OSRAM	Single	IK08	400lm	12/24 VDC	25°/40°/60°
3x3W	CREE/OSRAM	RGB 3in 1	IK08	180lm	12/24 VDC	25°/40°/60°
3x4W	CREE/OSRAM	RGB 4in 1	IK08	260lm	12/24 VDC	25°/40°/60°




AUW4063L2-0.328M

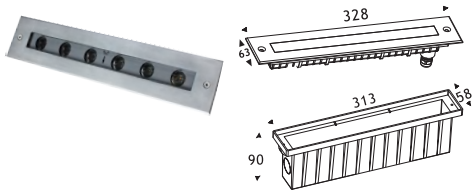


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W	CREE/OSRAM	Single	IK08	798lm	12/24 VDC	10°/25°/40°/60°/45°35°
6x2.5W	CREE/OSRAM	RGB 3in 1	IK08	375lm	12/24 VDC	25°/40°/60°/45°35°
6x3.5W	CREE/OSRAM	RGBW 4in 1	IK08	520lm	12/24 VDC	25°/40°/60°/45°35°




AUW5063L2-0.328M

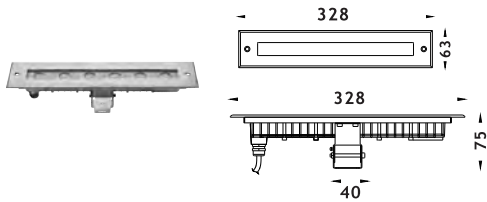

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W	CREE/OSRAM	Single	IK08	798lm	12/24 VDC	25°/40°/60°
6x3W	CREE/OSRAM	RGB 3in 1	IK08	375lm	12/24 VDC	25°/40°/60°
6x4W	CREE/OSRAM	RGB 4in 1	IK08	520lm	12/24 VDC	25°/40°/60°




AUW4063L4-0.195M

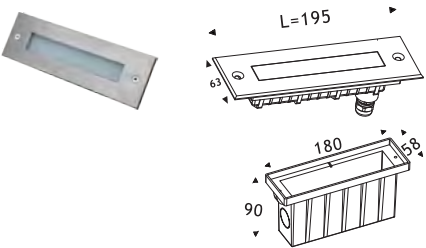

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
2.2W	OSRAM	Single	IK08	--	12/24 VDC	120°
2.2W	OSRAM	RGB 3in 1	IK08	--	12/24 VDC	120°



AUW4063L4-0.328M

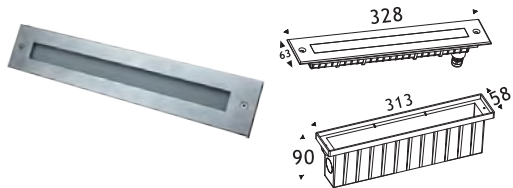

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3-6W	OSRAM	Single	IK08	--	12/24 VDC	120°
3-6W	OSRAM	RGB 3in 1	IK08	--	12/24 VDC	120°




WARNING: Must be installed under the water to prevent the light from being burnt off because of over-heating



LED Fountain Light

Manufactured with corrosion-resistant SUS316 stainless steel, ensuring long-term stability and durability of the underwater lights.

Waterproof Rating: Possesses excellent waterproof performance, employing special sealing design to achieve IP68 waterproof rating, ensuring reliable operation in underwater environments.

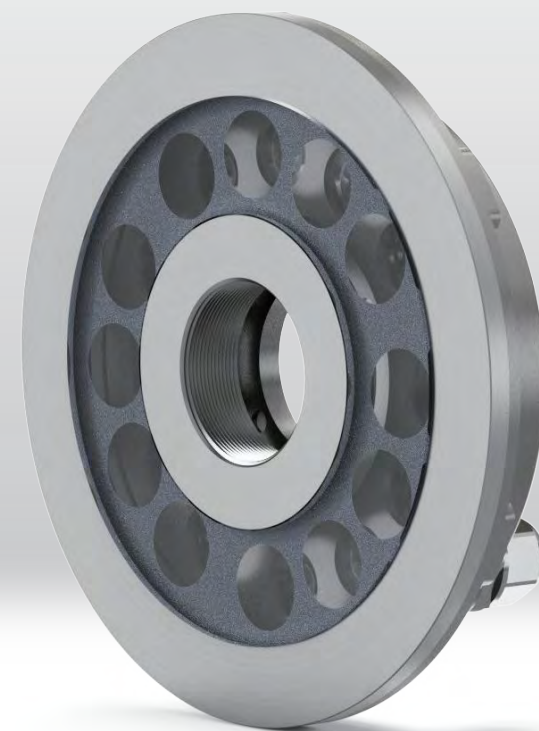



LED Fountain Light

RGB/RGBW

Diverse Lighting Effects:
The underwater lights offer a variety of lighting effects and color options, including mono color, multi-color, gradient, and flashing. By using controller or remote, the brightness, color, and mode of the lights can be easily adjusted, creating different underwater visual effects and adding charm and amusement.





LED Fountain Light



Series UR

Diverse Lighting Effects:
The underwater lights
offer a variety of lighting
effects and color options.


Including single color,
multi-color, gradient,
and flashing.

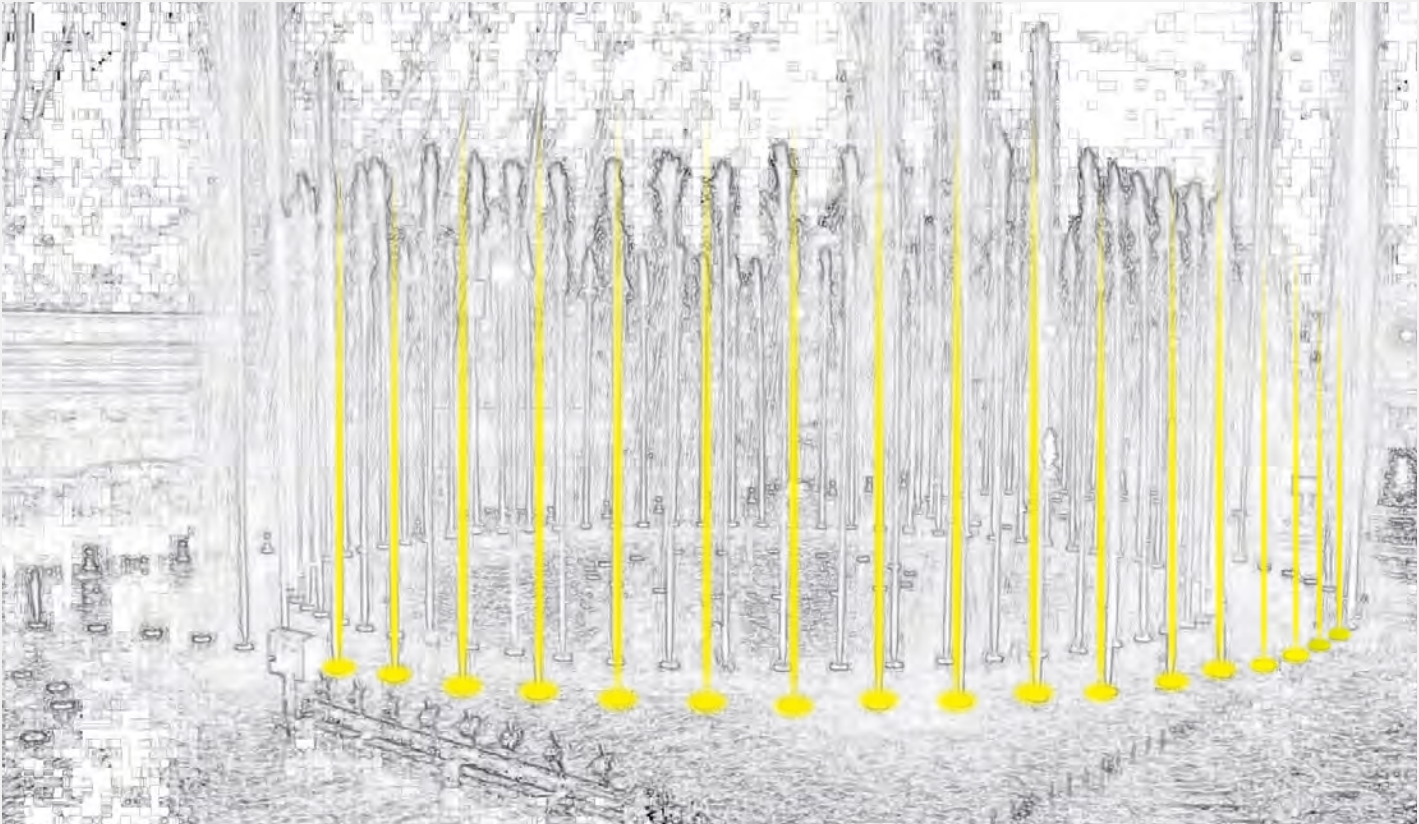

Material Quality
SUS 316L stainless steel housing
Tempered glass



LED
CREE/OSRAM/BRIDGELUX,
CRI>80(CRI>90 on request)




Quality/Supporting
IP68 IK10
Life time ≥50000 hrs
Operating temperature -20 C ~40 C

By using a controller or
remote, the brightness,
color, and mode of the
lights can be easily adjusted,
creating different underwater
visual effects and adding
charm and amusement.

LED Fountain Light



AUW4182R-09

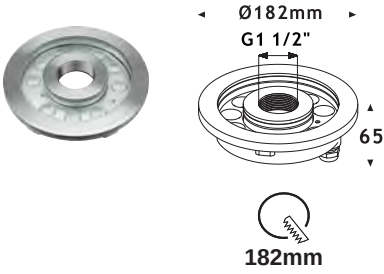


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
9x2W	CREE/OSRAM	Single	IK08	1450lm	12/24 VDC	10°/25°/40°/60°/10°30°/10°60°
9x2.5W	OSRAM	RGB 3in 1	IK08	690lm	12/24 VDC	25°/40°/60°/10°30°/10°60°
9x3.5W	OSRAM	RGBW 4in 1	IK08	960lm	12/24 VDC	25°/40°/60°/10°30°/10°60°




AUW4149R



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
9x2W	CREE/OSRAM	Single	IK08	1450lm	12/24 VDC	10°/25°/40°/60°/10°30°/10°60°
9x2.5W	OSRAM	RGB 3in 1	IK08	690lm	12/24 VDC	25°/40°/60°/10°30°/10°60°
9x3.5W	OSRAM	RGBW 4in 1	IK08	960lm	12/24 VDC	25°/40°/60°/10°30°/10°60°




AUW4182R-12

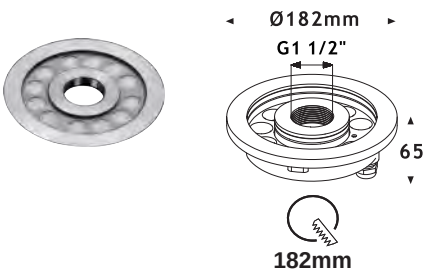

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x2W	CREE/OSRAM	Single	IK08	1950lm	12/24 VDC	10°/25°/40°/60°/10°30°/10°60°
12x2.5W	OSRAM	RGB 3in 1	IK08	900lm	12/24 VDC	25°/40°/60°/10°30°/10°60°
12x3.5W	OSRAM	RGBW 4in 1	IK08	1260lm	12/24 VDC	25°/40°/60°/10°30°/10°60°




AUW4170R

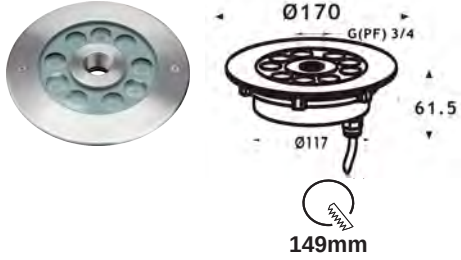

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
9x2W	CREE/OSRAM	Single	IK08	1450lm	12/24 VDC	10°/25°/40°/60°/10°30°/10°60°
9x2.5W	OSRAM	RGB 3in 1	IK08	690lm	12/24 VDC	25°/40°/60°/10°30°/10°60°
9x3.5W	OSRAM	RGBW 4in 1	IK08	960lm	12/24 VDC	25°/40°/60°/10°30°/10°60°




AUW4200R-09

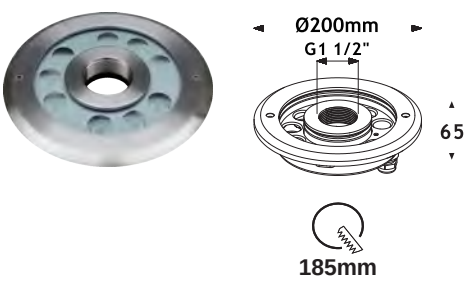


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
9x2W	CREE/OSRAM	Single	IK08	1450lm	12/24 VDC	10°/25°/40°/60°/10°30°/10°60°
9x2.5W	OSRAM	RGB 3in 1	IK08	690lm	12/24 VDC	25°/40°/60°/10°30°/10°60°
9x3.5W	OSRAM	RGBW 4in 1	IK08	960lm	12/24 VDC	25°/40°/60°/10°30°/10°60°




AUW4115R

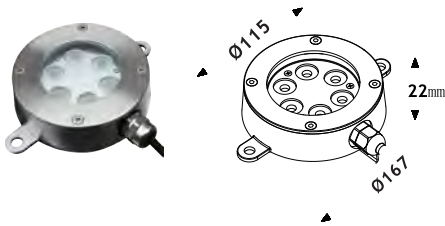

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W	CREE/OSRAM	Single	IK08	1020lm	12/24 VDC	10°/25°/40°/60°/10°30°/10°60°
6x2.5W	OSRAM	RGB 3in 1	IK08	450lm	12/24 VDC	25°/40°/60°/10°30°/10°60°
6x3.5W	OSRAM	RGBW 4in 1	IK08	630lm	12/24 VDC	25°/40°/60°/10°30°/10°60°




AUW4200R-12

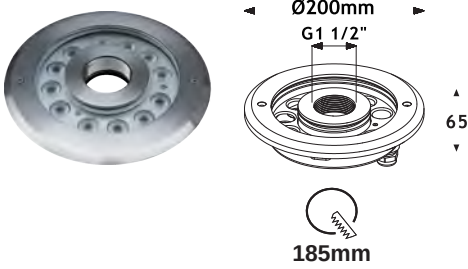

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x2W	CREE/OSRAM	Single	IK08	1950lm	12/24 VDC	10°/25°/40°/60°/10°30°/10°60°
12x2.5W	OSRAM	RGB 3in 1	IK08	900lm	12/24 VDC	25°/40°/60°/10°30°/10°60°
12x3.5W	OSRAM	RGBW 4in 1	IK08	1260lm	12/24 VDC	25°/40°/60°/10°30°/10°60°



AUW4160R

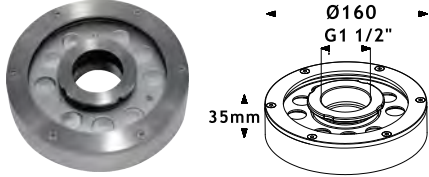

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
9x2W	CREE/OSRAM	Single	IK08	1450lm	12/24 VDC	10°/25°/40°/60°/10°30°/10°60°
9x2.5W	OSRAM	RGB 3in 1	IK08	690lm	12/24 VDC	25°/40°/60°/10°30°/10°60°
9x3.5W	OSRAM	RGBW 4in 1	IK08	960lm	12/24 VDC	25°/40°/60°/10°30°/10°60°



WARNING: Must be installed under the water to prevent the light from being burnt off because of over-heating

HIGH POWER



REFLECTIVE CUP



COB




LED Underwater Light


Manufactured with corrosion-resistant 316 stainless steel, ensuring long-term stability and durability of the underwater lights.

Waterproof Rating: Possesses excellent waterproof performance, employing special sealing design to achieve an IP68 waterproof rating, ensuring reliable operation in underwater environments.

Series UT



Ground Mounted



Wall Mounted

LED Underwater Light



Controllable Angle

IK08/IP68



LED Underwater Light

Series UT

Diverse Lighting Effects: The underwater lights offer a variety of lighting effects and color options, including mono color, multi-color, gradient, and flashing.

By using controller or remote, the brightness, color, and mode of the lights can be easily adjusted, creating different underwater visual effects and adding charm and amusement.



Easily adjust the
brightness, color,
and mode of lights




SIZE

LED Underwater Spot Light

CE ErP IP68 RoHS 1-10V Triac PWM DALI 512 RGB RGBW

AUW5042R




Overheat Sensor Inside316 SUS

Adjustable angle 1Adjustable angle 2Adjustable angle 3



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x4W	CREE COB	Single	IK08	300lm	12/24 VDC	15°/24°/36°/55°
1x3W	OSRAM	Single	IK08	210lm	12/24 VDC	10°/25°/40°/60°/80°/10°45°/25°45°
1x3W	OSRAM	RGB 3in 1	IK08	75lm	12/24 VDC	25°/40°/60°
1x4W	OSRAM	RGBW 4in 1	IK08	100lm	12/24 VDC	25°/40°/60°

AUW5095R




Overheat Sensor Inside316 SUS

Adjustable angle 1Adjustable angle 2Adjustable angle 3



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x6W	CREE COB	Single	IK08	400lm	12/24 VDC	12°/24°/35°
3x2W	CREE/OSRAM	Single	IK08	520lm	12/24 VDC	10°/25°/40°/60°/80°/10°45°/25°45°
3x2.5W	OSRAM	RGB 3in 1	IK08	200lm	12/24 VDC	25°/40°/60°
3x3.5W	OSRAM	RGBW 4in 1	IK08	260lm	12/24 VDC	25°/40°/60°

AUW5065R




Overheat Sensor Inside316 SUS

Adjustable angle 1Adjustable angle 2Adjustable angle 3



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x6W	CREE COB	Single	IK08	540lm	12/24 VDC	15°/24°/36°/55°
3x2W	OSRAM	Single	IK08	300lm	12/24 VDC	10°/25°/40°/60°/80°/10°45°/25°45°
3x2.5W	OSRAM	RGB 3in 1	IK08	200lm	12/24 VDC	25°/40°/60°
3x3.5W	OSRAM	RGBW 4in 1	IK08	260lm	12/24 VDC	25°/40°/60°

AUW5125R




Overheat Sensor Inside316 SUS

Adjustable angle 1Adjustable angle 2Adjustable angle 3



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x15W	CREE COB	Single	IK08	1200lm	24 VDC	15°/24°/36°/55°
6x2.5W	CREE/OSRAM	Single	IK08	120lm	12/24 VDC	10°/25°/40°/60°/80°/10°45°/25°45°
6x2.5W	OSRAM	RGB 3in 1	IK08	450lm	12/24 VDC	25°/40°/60°
6x3.5W	OSRAM	RGBW 4in 1	IK08	630lm	12/24 VDC	25°/40°/60°

AUW5224R1*α-XX-Z




Overheat Sensor Inside316 SUS

Adjustable angle 1Adjustable angle 2Adjustable angle 3



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x45W	CREE COB	Single	IK08	4500lm	24 VDC	15°/24°/36°/55°
18x2W	CREE/OSRAM	Single	IK08	2400lm	12/24 VDC	10°/25°/40°/60°/80°/10°45°/25°45°
18x2.5W	OSRAM	RGB 3in 1	IK08	1800lm	12/24 VDC	25°/40°/60°
18x3.5W	OSRAM	RGBW 4in 1	IK08	2900lm	12/24 VDC	25°/40°/60°

AUW5150R



Overheat Sensor Inside316 SUS

Adjustable angle 1Adjustable angle 2Adjustable angle 3




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x20W	CREE COB	Single	IK08	1600lm	24 VDC	15°/24°/36°/55°
12x2.5W	CREE/OSRAM	Single	IK08	2400lm	12/24 VDC	10°/25°/40°/60°/80°/10°45°/25°45°
12x2.5W	OSRAM	RGB 3in 1	IK08	900lm	12/24 VDC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in 1	IK08	1260lm	12/24 VDC	25°/40°/60°

WARNING: Must be installed under the water to prevent the light from being burnt off because of over-heating


LED Underwater Spot Light




AUW5061R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x2W	OSRAM	Single	IK08	160lm	12/24 VDC	15°/30°/45°/60°
1x3W	OSRAM	RGB 3in 1	IK08	70lm	12/24 VDC	25°/40°/60°




AUW5130R

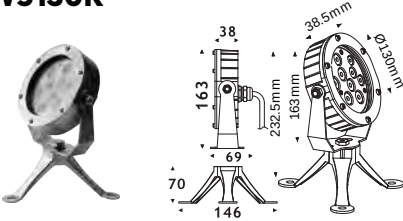


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
9x2W	CREE/OSRAM	Single	IK08	1200lm	12/24 VDC	15°/30°/45°/60°
9x2.5W	OSRAM	RGB 3in 1	IK08	560lm	12/24 VDC	15°/30°/45°/60°




AUW5113R

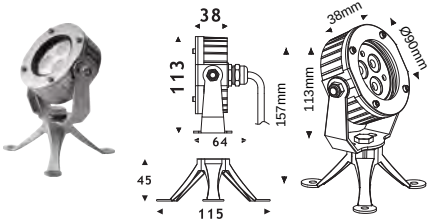


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x6W	CREE COB	Single	IK08	480lm	12/24 VDC	15°/30°/45°/60°
3x2W	CREE/OSRAM	Single	IK08	360lm	12/24 VDC	15°/30°/45°/60°
3x3W	OSRAM	RGB 3in 1	IK08	200lm	12/24 VDC	15°/30°/45°/60°




AUW5158R

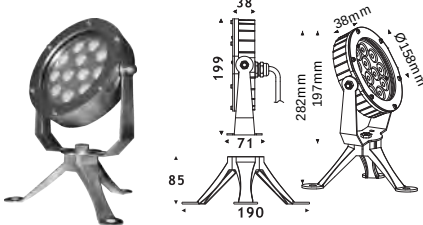


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x2W	CREE/OSRAM	Single	IK08	1600lm	12/24 VDC	15°/30°/45°/60°
12x3W	OSRAM	RGB 3in 1	IK08	900lm	12/24 VDC	15°/30°/45°/60°
12x4W	OSRAM	RGBW 4in 1	IK08	1200lm	12/24 VDC	15°/30°/45°/60°




AUW5113R

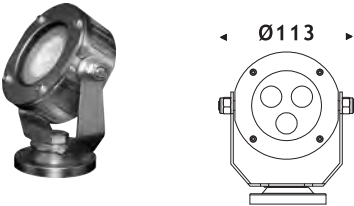


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x6W	CREE COB	Single	IK08	480lm	12/24 VDC	15°/30°/45°/60°
3x2W	CREE/OSRAM	Single	IK08	360lm	12/24 VDC	15°/30°/45°/60°
3x3W	OSRAM	RGB 3in 1	IK08	200lm	12/24 VDC	15°/30°/45°/60°




AUW5220R

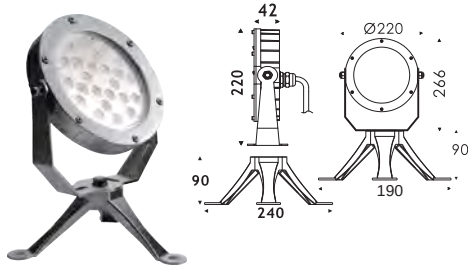


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
24x2W	CREE/OSRAM	Single	IK08	3120lm	12/24 VDC	15°/30°/45°/60°
24x2.5W	OSRAM	RGB 3in 1	IK08	1800lm	12/24 VDC	15°/30°/45°/60°
24x3W	OSRAM	RGBW 4in 1	IK08	2400lm	12/24 VDC	15°/30°/45°/60°



AUW5130R

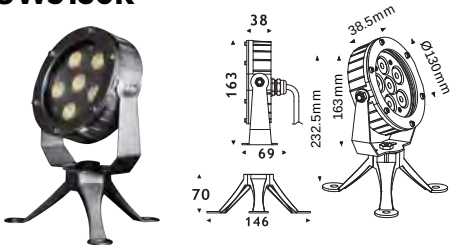

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2W	CREE/OSRAM	Single	IK08	780lm	12/24 VDC	15°/30°/45°/60°
6x3W	OSRAM	RGB 3in 1	IK08	450lm	12/24 VDC	15°/30°/45°/60°
6x4W	OSRAM	RGBW 4in 1	IK08	600lm	12/24 VDC	15°/30°/45°/60°




WARNING: Must be installed under the water to prevent the light from being burnt off because of over-heating



LED Linear Wall Washer Light

Use 6063# aluminum material for our components, known for its excellent heat dissipation properties.

The surface coating meets the Class III rating in the paint adhesion test and offers a certain level of corrosion resistance.

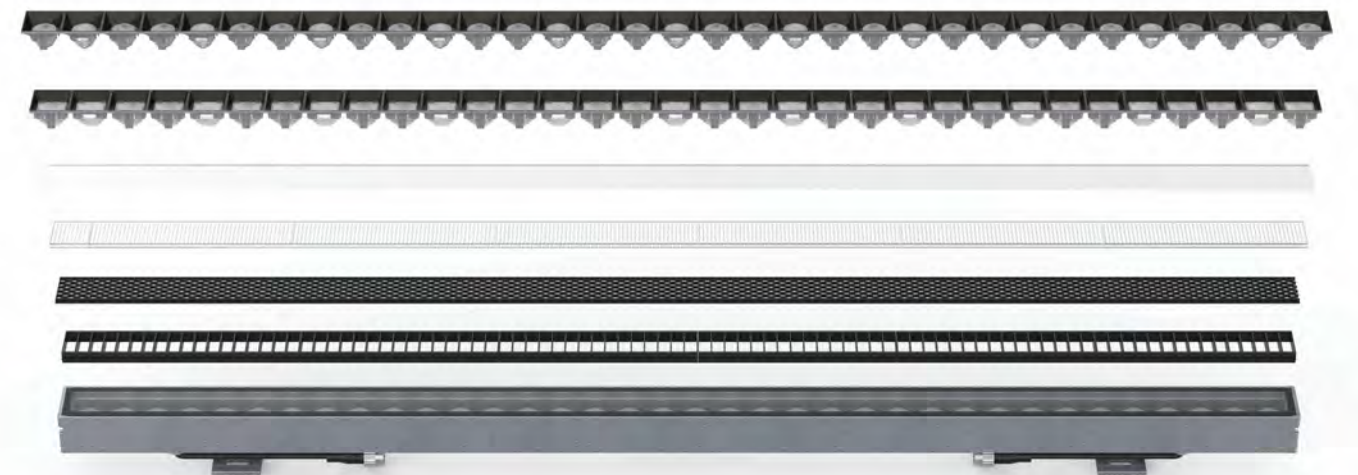




LED Wall Washer Light



Washer Light

We utilize OSRAM LED chips from a leading international brand, with a color rendering index (CRI) of 80 (optional 90, 95, or full spectrum) and uniform light distribution.

spine, the carabiner's strongest axis. The light fixtures incorporate various anti-glare accessories, enabling a UGR less than 16



Material Quality
12# Die-casting powder coated aluminum housing
Tempered glass



LED
CREE/OSRAM/BRIDGELUX, CRI>80(CRI>90 on request)
Cable 0.25m




Quality/Supporting
IP65 IK05
Life time ≥50000 hrs
Operating temperature -20 C ~40 C


LED Wall washer Light

CE ErP IP65 RoHS 1-10V Triac PWM DALI DMX RGB RGBW


AWW6025L-0.3M/0.5M/1M

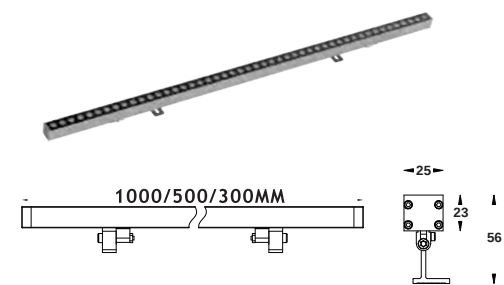


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6~10W(0.3M)	OSRAM	Single	IK05	700lm	12/24 VDC/220~240VAC	15°/20°/30°/45°/10°65°
9~14W(0.5M)	OSRAM	Single	IK05	1100lm	12/24 VDC/220~240VAC	15°/20°/30°/45°/10°65°
18~28W(1M)	OSRAM	Single	IK05	2380lm	12/24 VDC/220~240VAC	15°/20°/30°/45°/10°65°




AWW6025L-0.3M/0.5M/1M

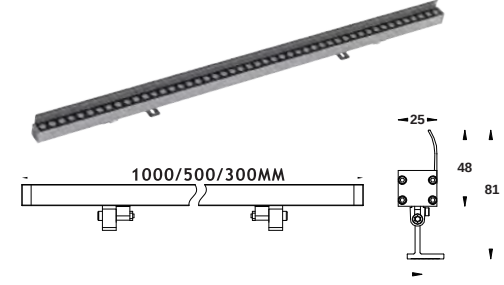

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6~10W(0.3M)	OSRAM	Single	IK05	700lm	12/24 VDC/220~240VAC	15°/20°/30°/45°/10°65°
9~14W(0.5M)	OSRAM	Single	IK05	1100lm	12/24 VDC/220~240VAC	15°/20°/30°/45°/10°65°
18~28W(1M)	OSRAM	Single	IK05	2380lm	12/24 VDC/220~240VAC	15°/20°/30°/45°/10°65°




AWW6042L-0.3M/0.5M/1M

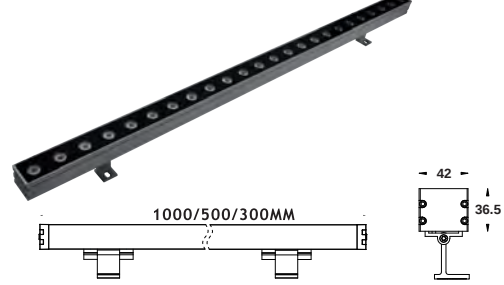


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6~9W(0.3M)	OSRAM	Single	IK05	720lm	12/24 VDC/220~240VAC	10°/24°/36°/60°/15°45°/10°60°
12~18W(0.5M)	OSRAM	Single	IK05	1400lm	12/24 VDC/220~240VAC	10°/24°/36°/60°/15°45°/10°60°
24~48W(1M)	OSRAM	Single	IK05	3800lm	12/24 VDC/220~240VAC	10°/24°/36°/60°/15°45°/10°60°
24~60W(1M)	OSRAM	RGB 3in 1	IK05	1700lm	12/24 VDC	10°/24°/36°/60°/15°45°/10°60°
72W(1M)	OSRAM	RGBW 4in 1	IK05	2500lm	12/24 VDC	10°/24°/36°/60°/15°45°/10°60°




AWW6042L-0.3M/0.5M/1M

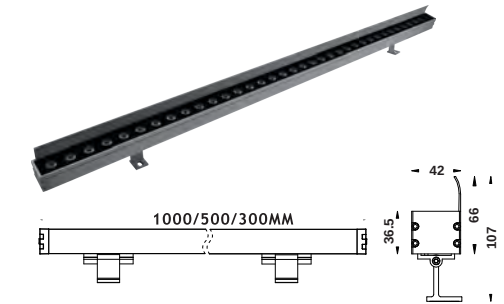


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6~9W(0.3M)	OSRAM	Single	IK05	720lm	12/24 VDC/220~240VAC	10°/24°/36°/60°/15°45°/10°60°
12~18W(0.5M)	OSRAM	Single	IK05	1400lm	12/24 VDC/220~240VAC	10°/24°/36°/60°/15°45°/10°60°
24~48W(1M)	OSRAM	Single	IK05	3800lm	12/24 VDC/220~240VAC	10°/24°/36°/60°/15°45°/10°60°
24~60W(1M)	OSRAM	RGB 3in 1	IK05	1700lm	12/24 VDC	10°/24°/36°/60°/15°45°/10°60°
72W(1M)	OSRAM	RGBW 4in 1	IK05	2500lm	12/24 VDC	10°/24°/36°/60°/15°45°/10°60°




AWW6050L-/0.5M/1M

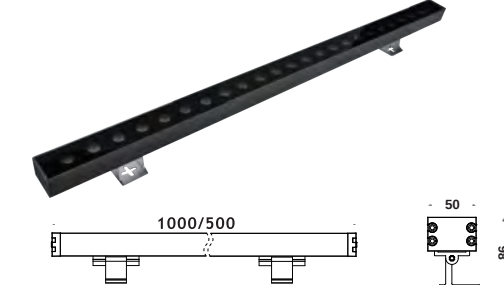


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
24W(0.5M)	OSRAM	Single	IK08	1390lm	12/24 VDC/220~240VAC	10°/15°/30°/60°/15°45°/10°60°
48W(1M)	OSRAM	Single	IK08	2870lm	12/24 VDC/220~240VAC	10°/15°/30°/60°/15°45°/10°60°
60W(1M)	OSRAM	RGB 3in 1	IK08	1680lm	12/24 VDC/220~240VAC	10°/15°/30°/60°/15°45°/10°60°
84W(1M)	OSRAM	RGBW 4in 1	IK08	2350lm	12/24 VDC/220~240VAC	10°/15°/30°/60°/15°45°/10°60°



AWW6072L-0.5M/1M

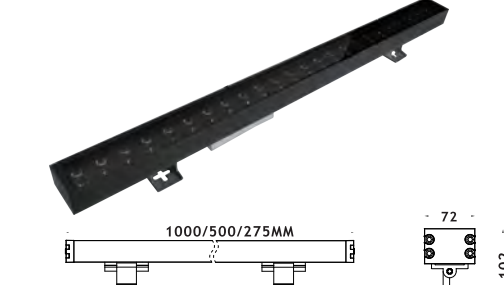

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
36W(0.5M)	OSRAM	Single	IK08	2080lm	12/24 VDC/220~240VAC	10°/15°/30°/60°/15°45°/10°60°
72W(1M)	OSRAM	Single	IK08	4180lm	12/24 VDC/220~240VAC	10°/15°/30°/60°/15°45°/10°60°
108W(1M)	OSRAM	RGB 3in 1	IK08	3140lm	12/24 VDC/220~240VAC	10°/15°/30°/60°/15°45°/10°60°
144W(1M)	OSRAM	RGBW 4in 1	IK08	4180lm	12/24 VDC/220~240VAC	10°/15°/30°/60°/15°45°/10°60°



LED Ceiling Light

Use 6063# aluminum material for our components, know for its excellent heat dissipation properties.

36 PCS LED



Outdoor Light

The surface coating meets the Class III rating in the paint adhesion test and offers a certain level of corrosion resistance.

LED Ceiling Light






LED Ceiling Light



LED Ceiling Light

We utilize OSRAM LED chips from a leading international brand, with a color rendering index (CRI) of 80 (optional 90, 95, or full spectrum) and uniform light distribution.

spine, the carabiner's strongest axis. The light fixtures incorporate various anti-glare accessories, enabling a UGR less than 16



Material Quality
12# Die-casting powder coated aluminum housing
Tempered glass



LED
CREE/OSRAM/BRIDGELUX,
CRI>80(CRI>90 on request)




Quality/Supporting
IP65 IK05
Life time ≥50000 hrs
Operating temperature -20 C ~40 C


LED IP66 Ceiling Light

CE ErP IP66 RoHS 1-10V Triac PWM DALI 12V RGB RGBW


ASM7128R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x2.5W	CREE/OSRAM	Single	IK05	900lm	12/24 VDC/220-240VAC	10°/30°/40°/60°/90°/10°45°/20°65°
1x15W	CREE COB	Single	IK05	1200lm	12/24 VDC/220-240VAC	15°/24°/36°/60°




ASM7170S




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x2W	OSRAM/CREE	Single	IK05	900lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/90°
2x12W	CREE COB	Single	IK05	1200lm	12/24 VDC/220-240VAC	20°/36°/60°




ASM7168R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x2.5W	CREE/OSRAM	Single	IK05	2100lm	12/24 VDC/220-240VAC	10°/30°/40°/60°/90°/10°45°/20°65°
1x30W	CREE COB	Single	IK05	3000lm	12/24 VDC/220-240VAC	15°/24°/36°/60°




ASM7210S




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
24x1.5W	OSRAM/CREE	Single	IK05	3200lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/90°
4x10W	CREE COB	Single	IK05	3600lm	12/24 VDC/220-240VAC	20°/36°/60°




ASM7208R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
24x2W	CREE/OSRAM	Single	IK05	3080lm	12/24 VDC/220-240VAC	10°/30°/40°/60°/90°/10°45°/20°65°
4x12W	CREE COB	Single	IK05	4050lm	12/24 VDC/220-240VAC	15°/24°/36°/60°




ASM7260S




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
36x1.5W	OSRAM/CREE	Single	IK05	4320lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/90°
4x13W	CREE COB	Single	IK05	5670lm	12/24 VDC/220-240VAC	20°/36°/60°



ASM7258R




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
36x1.5W	CREE/OSRAM	Single	IK05	3850lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/90°
4x13W	CREE COB	Single	IK05	4950lm	12/24 VDC/220-240VAC	20°/36°/60°



LED IP66 Ceiling Light




ASM7050CR




Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	1x5W	CREE COB	Single	IK05	408lm	12/24 VDC/220-240VAC	10°
Black	1x5W	CREE COB	Single	IK05	408lm	12/24 VDC/220-240VAC	18°/22°/31°/58°
Customized							

ASM7100CR

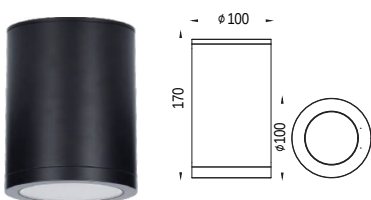


Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	1x20W	CREE COB	Single	IK05	2121lm	12/24 VDC/220-240VAC	10°
Black	1x20W	CREE COB	Single	IK05	2121lm	12/24 VDC/220-240VAC	18°/22°/31°/58°
Customized							

ASM7060CR




Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	1x10W	CREE COB	Single	IK05	1180lm	12/24 VDC/220-240VAC	10°
Black	1x10W	CREE COB	Single	IK05	1180lm	12/24 VDC/220-240VAC	18°/22°/31°/58°
Customized							

ASM7130CR

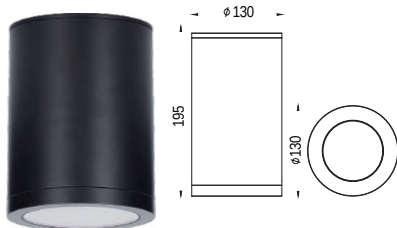

Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	1x35W	CREE COB	Single	IK05	2905lm	12/24 VDC/220-240VAC	10°
Black	1x35W	CREE COB	Single	IK05	2905lm	12/24 VDC/220-240VAC	18°/22°/30°/60°
Customized	6x4W	OSRAM SMD	RGB 3in 1	IK05	600lm	12/24 VDC	10°/20°/30°/60°
	6x4W	OSRAM SMD	RGBW 4in 1	IK05	600lm	12/24 VDC	10°/20°/30°/60°

ASM7075CR




Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	1x15W	CREE COB	Single	IK05	1412lm	12/24 VDC/220-240VAC	10°
Black	1x15W	CREE COB	Single	IK05	1412lm	12/24 VDC/220-240VAC	18°/22°/31°/58°
Customized							



LED IP66 Ceiling Light

CE ErP IP66 RoHS 1-10V Triac PWM DALI 12V RGB RGBW


ASM7050CS



Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	1x5W	CREE COB	Single	IK05	408lm	12/24 VDC/220-240VAC	10°
Black	1x5W	CREE COB	Single	IK05	408lm	12/24 VDC/220-240VAC	18°/22°/31°/58°
Customized							




ASM7100CS

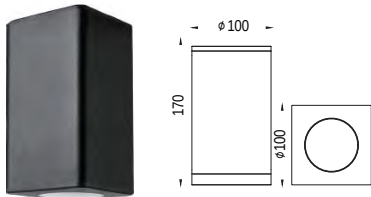

Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	1x20W	CREE COB	Single	IK05	2121lm	12/24 VDC/220-240VAC	10°
Black	1x20W	CREE COB	Single	IK05	2121lm	12/24 VDC/220-240VAC	18°/22°/31°/58°
Customized							




ASM7060CS



Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	1x10W	CREE COB	Single	IK05	1180lm	12/24 VDC/220-240VAC	10°
Black	1x10W	CREE COB	Single	IK05	1180lm	12/24 VDC/220-240VAC	18°/22°/31°/58°
Customized							




ASM7130CS

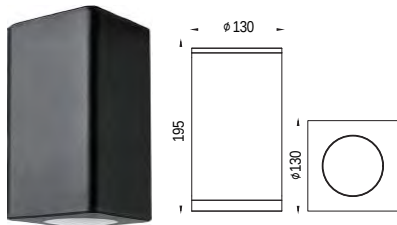

Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	1x35W	CREE COB	Single	IK05	2905lm	12/24 VDC/220-240VAC	10°
Black	1x35W	CREE COB	Single	IK05	2905lm	12/24 VDC/220-240VAC	18°/22°/30°/60°
Customized	6x4W	OSRAM SMD	RGB 3in 1	IK05	600lm	12/24 VDC	10°/20°/30°/60°
	6x4W	OSRAM SMD	RGBW 4in 1	IK05	600lm	12/24 VDC	10°/20°/30°/60°



ASM7075CS



Color	Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
White	1x15W	CREE COB	Single	IK05	1412lm	12/24 VDC/220-240VAC	10°
Black	1x15W	CREE COB	Single	IK05	1412lm	12/24 VDC/220-240VAC	18°/22°/31°/58°
Customized							



LED Recessed Ceiling Light

The lights are manufactured with high-quality 12# die-cast aluminum, ensuring durability and weather resistance to withstand various outdoor environments. The chosen material guarantees stability and a long lifespan for the lighting fixtures.

The lights are specifically designed with waterproof and dustproof features, achieving IP66/IP67 waterproof ratings.

The structural anti-glare design of our outdoor ceiling lights effectively reduces the UGR, delivering bright and comfortable light in outdoor spaces.

It provides optimal illumination while minimizing discomfort caused by glare.






LED Recessed Ceiling Light


LED IP67 Ceiling Light

CE ErP IP67 RoHS 1-10V Triac PWM DALI 512 RGB RGBW


ARM7095R

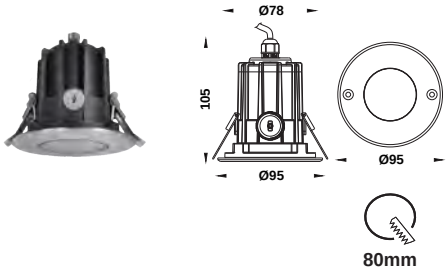


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x2W	CREE/OSRAM	Single	IK10	157lm	12/24 VDC/220-240VAC	8°/15°/25°/40°/60°/10°45°/20°65°
1x3W	OSRAM	RGB 3in 1	IK10	--	12/24 VDC	12°/25°/40°/60°
1x4W	OSRAM	RGBW 4in 1	IK10	--	12/24 VDC	12°/25°/40°/60°




ARM7210R

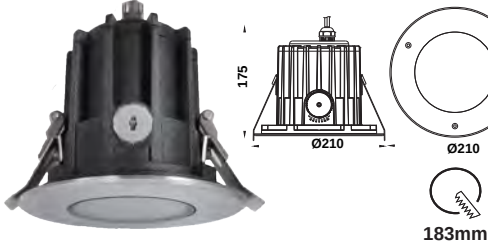


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
9x3W	CREE XPG	Single	IK10	1800lm	12/24 VDC/220-240VAC	3°/8°
12x2W	CREE/OSRAM	Single	IK10	1800lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°45°/20°65°
1x25W	CREE COB	Single	IK10	1800lm	12/24 VDC/220-240VAC	18°/24°/38°/60°




ARM7130R

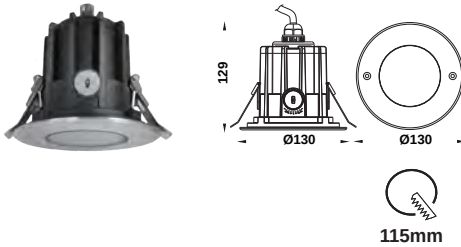


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
2x3W	CREE	Single	IK10	465lm	12/24 VDC/220-240VAC	3°/8°
3x2W	CREE/OSRAM	Single	IK10	465lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°45°/20°65°
1x6W	CREE COB	Single	IK10	465lm	12/24 VDC/220-240VAC	18°/24°/38°/60°




ARM7055R

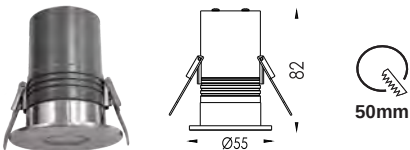


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x2W	CREE/OSRAM	Single	IK08	170lm	12/24 VDC/220-240VAC	8°/12°/25°/40°/60°/10°45°/25°45°
1x3W	CREE/OSRAM	RGB 3in 1	IK08	75lm	12/24 VDC	8°/12°/25°/40°/60°/10°45°/25°45°
1x4W	CREE/OSRAM	RGBW 4in 1	IK08	100lm	12/24 VDC	8°/12°/25°/40°/60°/10°45°/25°45°




ARM7160R

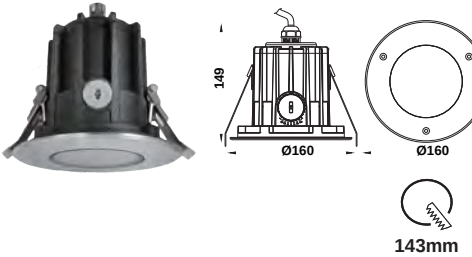


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
4x3W	CREE	Single	IK10	920lm	12/24 VDC/220-240VAC	3°/8°
6x2W	CREE/OSRAM	Single	IK10	920lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°45°/20°65°
1x12W	CREE COB	Single	IK10	920lm	12/24 VDC/220-240VAC	18°/24°/38°/60°




ARM7070R

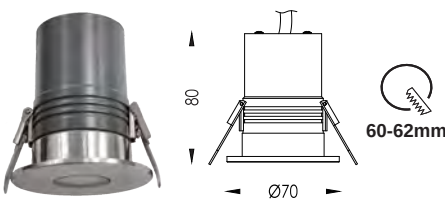


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x5W	CREE COB	Single	IK09	508lm	12/24 VDC/220-240VAC	15°/24°/36°/60°
1x6W	OSRAM	RGB 3in 1	IK09	170lm	12/24 VDC	8°/15°/25°/40°/60°
1x8W	OSRAM	RGBW 4in 1	IK09	225lm	12/24 VDC	8°/15°/25°/40°/60°



ARM7180R

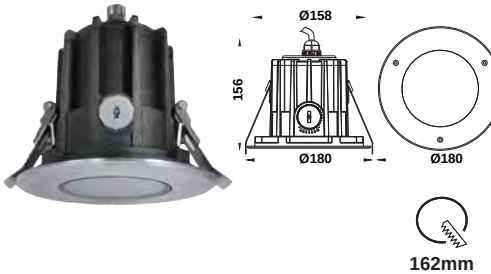

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x3W	CREE	Single	IK10	1310lm	12/24 VDC/220-240VAC	3°/8°
9x2W	CREE/OSRAM	Single	IK10	1310lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°45°/20°65°
1x20W	CREE COB	Single	IK10	1245lm	12/24 VDC/220-240VAC	18°/24°/38°/60°



LED Bollard Light

Stylish and versatile

The courtyard lamp has many shapes and is suitable for the application of various scenes.

Bring essential finishing touches to the courtyard.



Simple and fashionable design, comfortable lighting experience.





More Shape

IP65 water proof level,
IK09 is an important
parameter for outdoor
light, cus-made body
color and size.

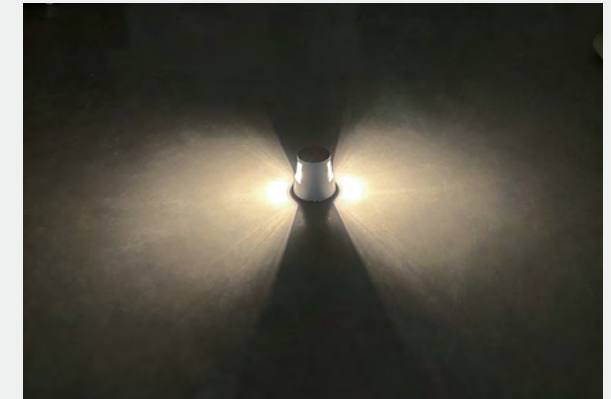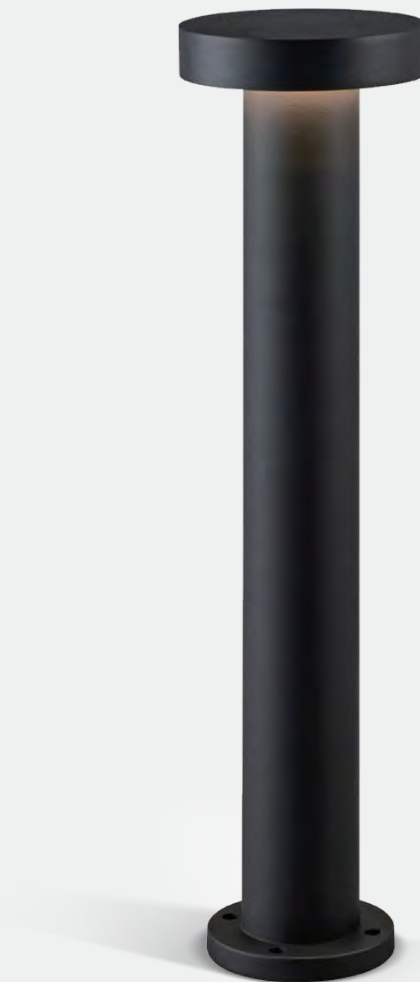



LED Garden Light




AGL8170H




Power	Installation	Color	Input Voltage	Beam Angle
7W	Inground	White	12/24 VDC/220-240VAC	120°
		Black		
		Customized		

ABL8095H

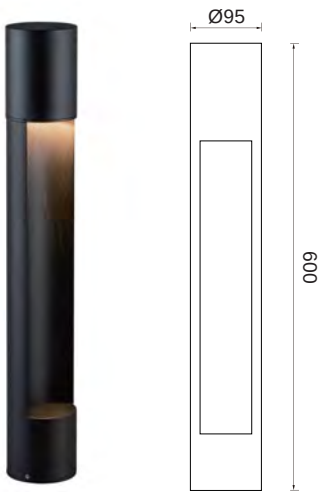


Power	Installation	Color	Input Voltage	Beam Angle
7W	Inground	White	12/24 VDC/220-240VAC	120°
		Black		
		Customized		

AGL8160H

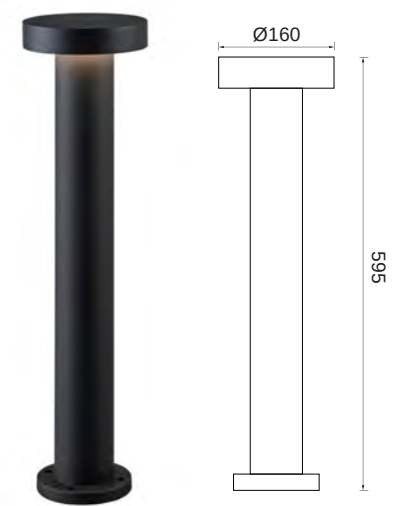

Power	Installation	Color	Input Voltage	Beam Angle
7W	Inground	White	12/24 VDC/220-240VAC	120°
		Black		
		Customized		

ABL8070H

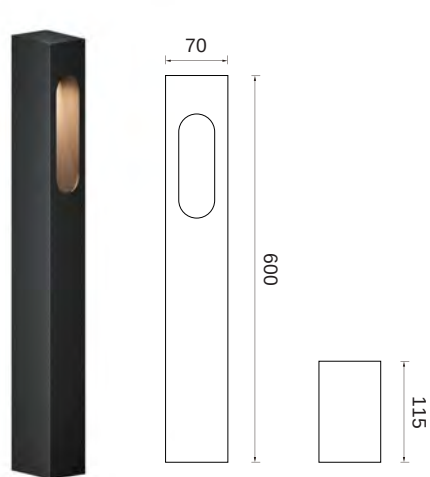


Power	Installation	Color	Input Voltage	Beam Angle
7W	Inground	White	12/24 VDC/220-240VAC	120°
		Black		
		Customized		

LED Garden Light


CE ENEC IP65 RoHS COMPLIANT 1-10V Triac PWM DALI DIMMABLE RGB RGBW

ABL8170H1C

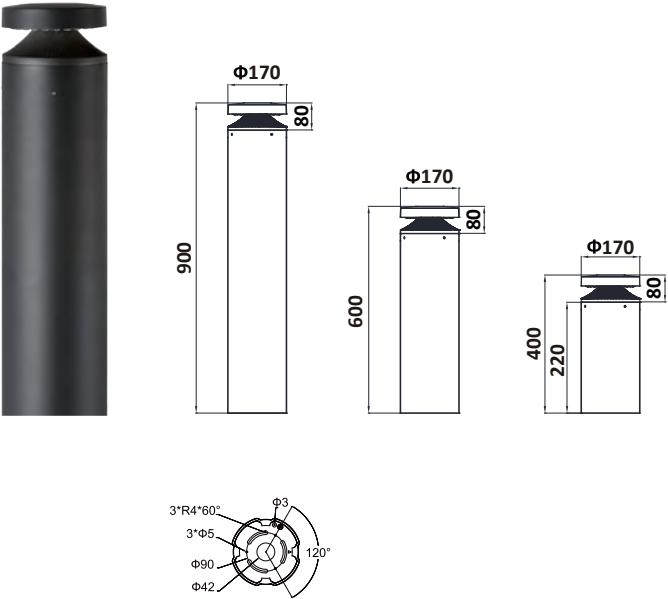


Power	Installation	CCT	IK	Luminous	Input Voltage
15W	Inground	3000K	IK09	675lm	AC 220-240V
25W	Inground	3000K	IK09	1125lm	AC 220-240V

ABL8170H1B

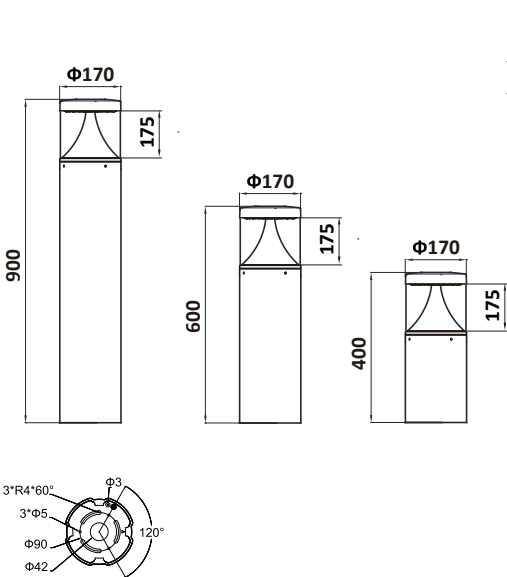


Power	Installation	CCT	IK	Luminous	Input Voltage
15W	Inground	3000K	IK09	1500lm	AC 220-240V
25W	Inground	3000K	IK09	2250lm	AC 220-240V

ABL8100H1A

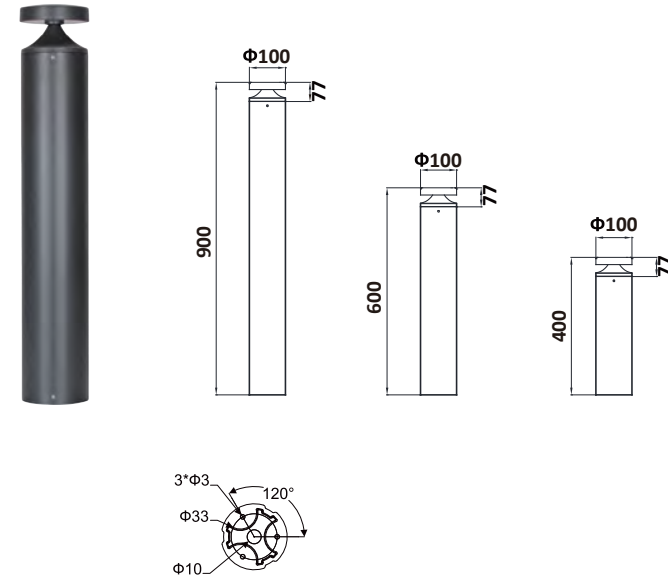

Power	Installation	CCT	IK	Luminous	Input Voltage
12W	Inground	3000K	IK09	780lm	AC 220-240V

ABL8100H1B

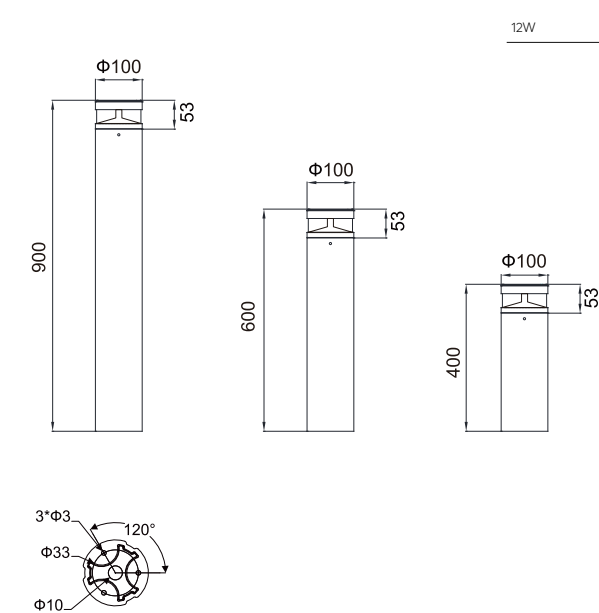


Power	Installation	CCT	IK	Luminous	Input Voltage
12W	Inground	3000K	IK09	852lm	AC 220-240V



LED Garden Light


CE ErP IP65 RoHS 1-10V Triac PWM DALI 12V RGB RGBW

AGL8172H1A

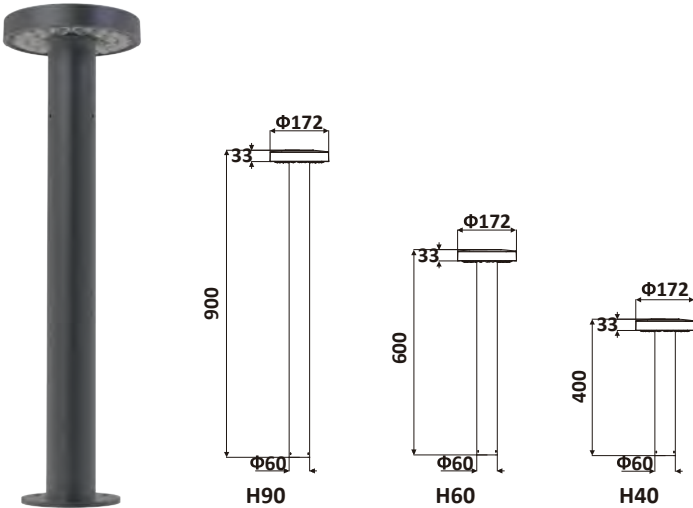

Power	Installation	CCT	IK	Luminous	Input Voltage
12W	Inground	3000K	IK09	1200lm	DC 3.7-4.2

AGL8160HB

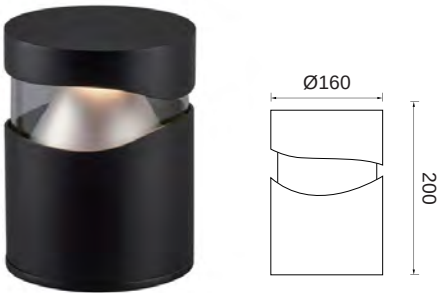


Power	Installation	Color	Input Voltage	Beam Angle
10W	Inground	White	12/24 VDC/220-240VAC	120°
		Black		
		Customized		


APT8200H1A




Power	Chip	LED QTY	CCT	IK	Luminous	Lens
20W	5050/3525	16	3000K	IK09	2940lm	4*1
40W	5050/3525	16	3000K	IK09	5640lm	4*1
60W	5050/3525	32	3000K	IK09	8460lm	4*1
80W	5050/3525	32	3000K	IK09	11200lm	4*1




L500



L650



L800

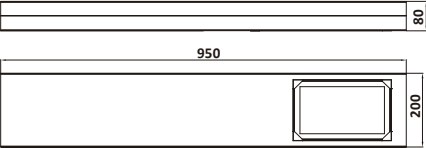


L950

LED Garden Light


CE ErP IP65 RoHS 1-10V Triac PWM DALI DMX RGB RGBW

AGL8197H1A

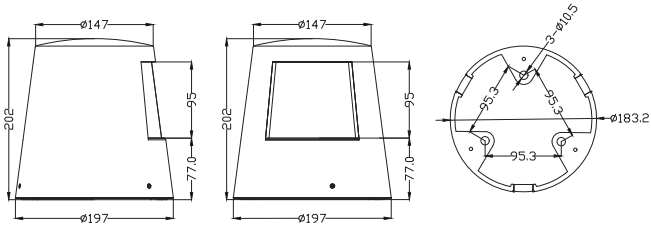


Wattage	LED	CCT	CRI	Luminous	Installation
10W	Lumileds 2835	2700-6500K	≥80	700lm	Inground
15W	Lumileds 2835	2700-6500K	≥80	1050lm	Inground
20W	Lumileds 2835	2700-6500K	≥80	1400lm	Inground

AGL8197H1C

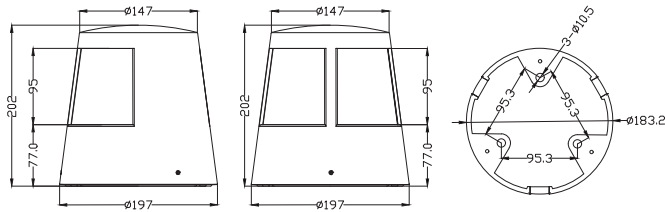


Wattage	LED	CCT	CRI	Luminous	Installation
10W	Lumileds 2835	2700-6500K	≥80	700lm	Inground
15W	Lumileds 2835	2700-6500K	≥80	1050lm	Inground
20W	Lumileds 2835	2700-6500K	≥80	1400lm	Inground

AGL8197H1B

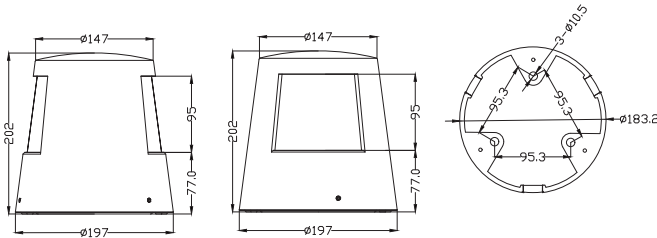

Wattage	LED	CCT	CRI	Luminous	Installation
10W	Lumileds 2835	2700-6500K	≥80	700lm	Inground
15W	Lumileds 2835	2700-6500K	≥80	1050lm	Inground
20W	Lumileds 2835	2700-6500K	≥80	1400lm	Inground

AGL8197H1D

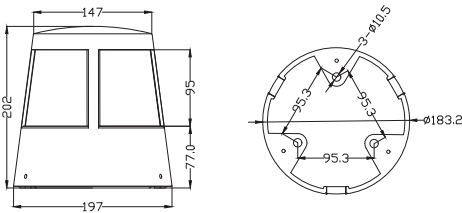


Wattage	LED	CCT	CRI	Luminous	Installation
10W	Lumileds 2835	2700-6500K	≥80	700lm	Inground
15W	Lumileds 2835	2700-6500K	≥80	1050lm	Inground
20W	Lumileds 2835	2700-6500K	≥80	1400lm	Inground

Recessed Under Water Light


1 Install condui tube

Put the conduit tube through the nut and rubber plug
#The conduit tube should reach the bottomof the rubber plug




2 Fasten the nut

Fasten the nut with the screw by using a tool.




3 Installing cables

Put the cable through the conduit tube and the hole of the mounting sleeve from outside.
Then insert the cable into the nut/rubber plug and the PG13.5 cable gland
Fix the nut of the PG13.5 cable gland tightly




4 Fix the back cover

Screw the PG13.5 with the connector on the conduit tube tightly with two wrenches.
Fix the back cover to the mounting sleeve by four screw.




5 Fixed bracket

Fix the two type "L" bracket on the mounting sleeve.
Dig a hole for the installation for mounting sleeve.
#The distance between these hole sand the ground should less than 1M.




6 Placing sleeves

Put the mounting sleeve into the hole.
Fasten it with the wall if the pool by a screw driver.




7 Connecting devices

Connect the lighting fixture with the power cable by connector.
Fasten the connector tightly to make sure it can reach Ip68.
Fix the light with the mounting sleeve by a screw driver.



8 Complete installation


Pour the water into the pool after the installation.



Recessed Inground Light


1 Installing sleeve

Install the mounting sleeves on the ground, the top side should be on the same level with the ground surface, power cable need to go through the mounting sleeve.
Note: The thickness of the gravel must ticker than 25mm.




2 Connecting devices

Connect the power cable with the lighting fixture.
Keep enough length for maintain




3 Fixed equipment

Fix the lighting fixture with the mounting sleeve by a screw diver.

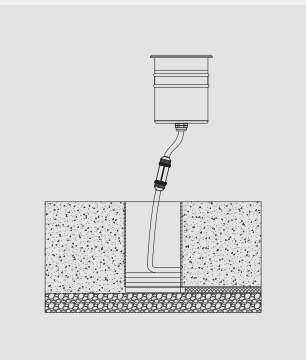

4 Complete installation


Organize cables and complete installation.



Garden Spot Light


1 Disassemble the base

Loosen the M5 screws and remove the lamp base bracket.




2 Positioning drilling

Drill two holes on the floor according to the hole position of the base support , and put rubber plugs or wood blocks into the holes.




3 Fixed base

Fix the base bracket with wood screws
On the wall or the floor.




4 Placing the power cord

Insert the power cable of the lamp into side hole of the base support.




5 Angle adjustment

Put the lamp into the base bracket, adjust the X-axis angle of the lamp, and then lock the screws.




6 Angle adjustment

Put the lamp into the base bracket, adjust the X-axis angle of the lamp, and then lock the screws.




7 Reset power cord

Put the power cord and the power cord of the lamp into the Ip67 waterproof connector.



8 Complete installation


Connect the power cord with the power cord of the lamp, and then lock the waterproof connector.



Surface Wall Light


1 Positioning drilling

Loosen the M4 screws and remove the lamp support.
Drill four fixing holes and one threading hole on the wall according to the holes on the support.
Inserta rubber plug or wood block in to the holes.




2 Fixed bracket

Pullout a power cord from the wall and pass it throught threading hole and then fix the support on the wall with wood screws.




3 Connect the power cord

Connect power cord to the power cable of the lamps,and then tie with waterproof tape (waterproof measures must be taken)













4 Complete installation


Put the long cable in place, then put the lamp into the support and lock the M4 MI screws.




Connection Diagram

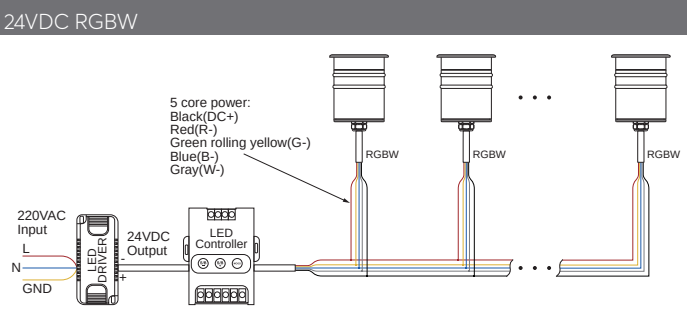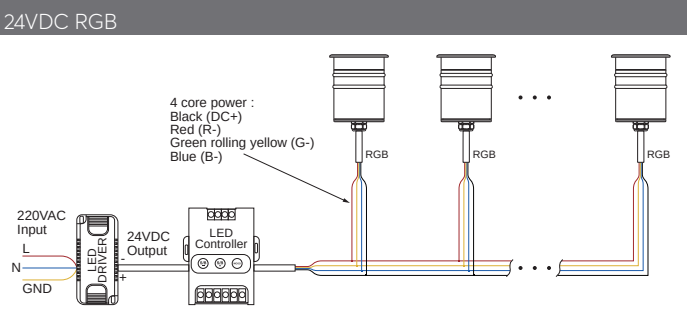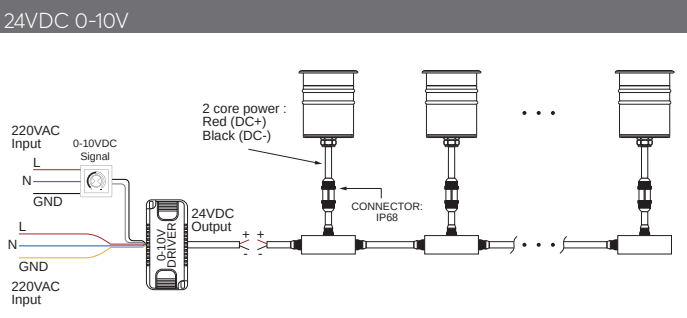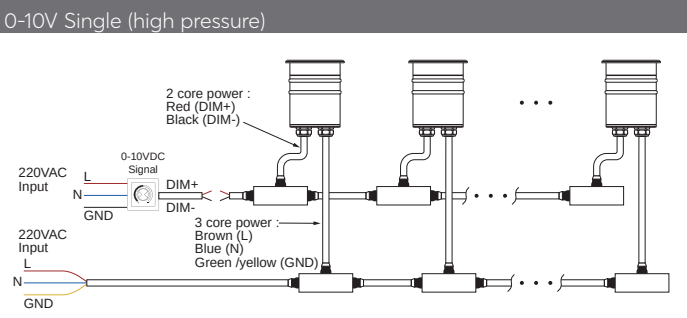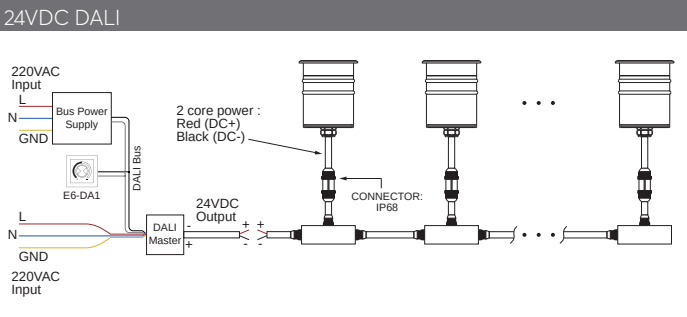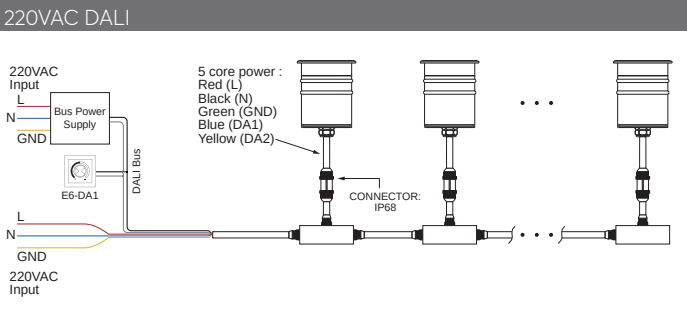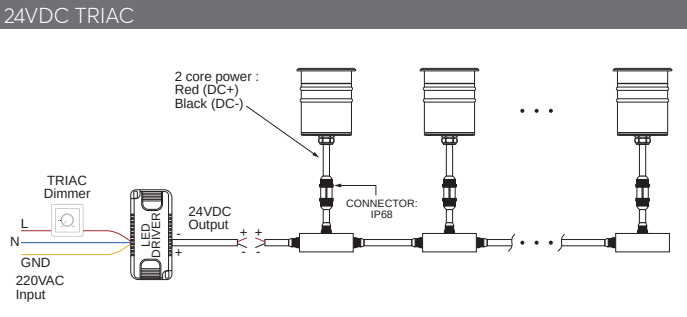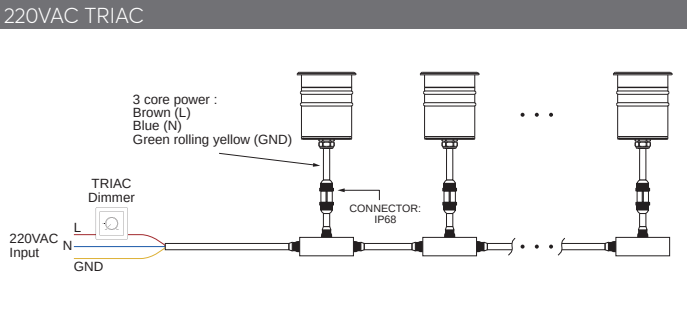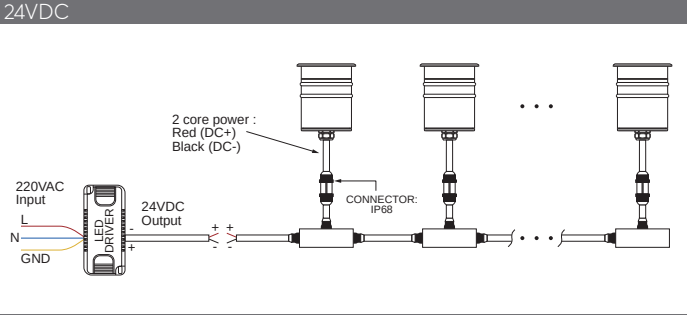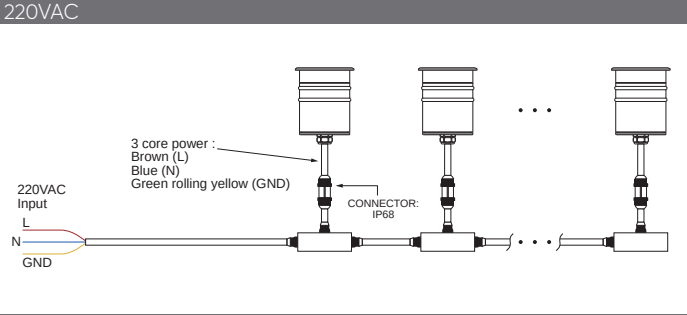


220VAC Single color/RGB/RGBW DMX512

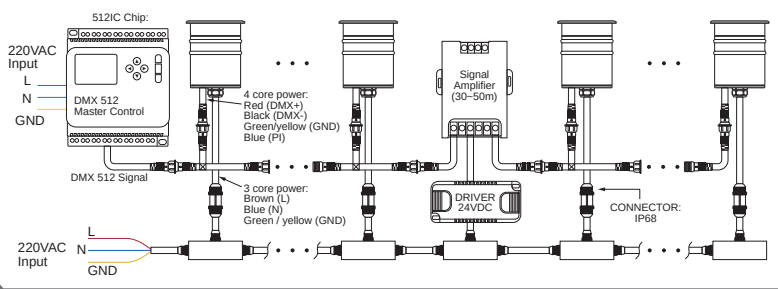

24VDC DMX512 (Type A)

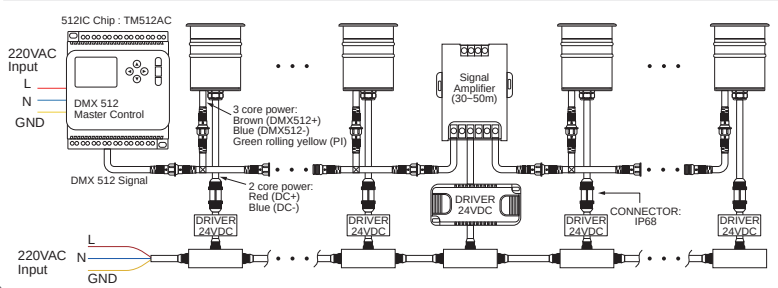

24VDC DMX512 (Type B)

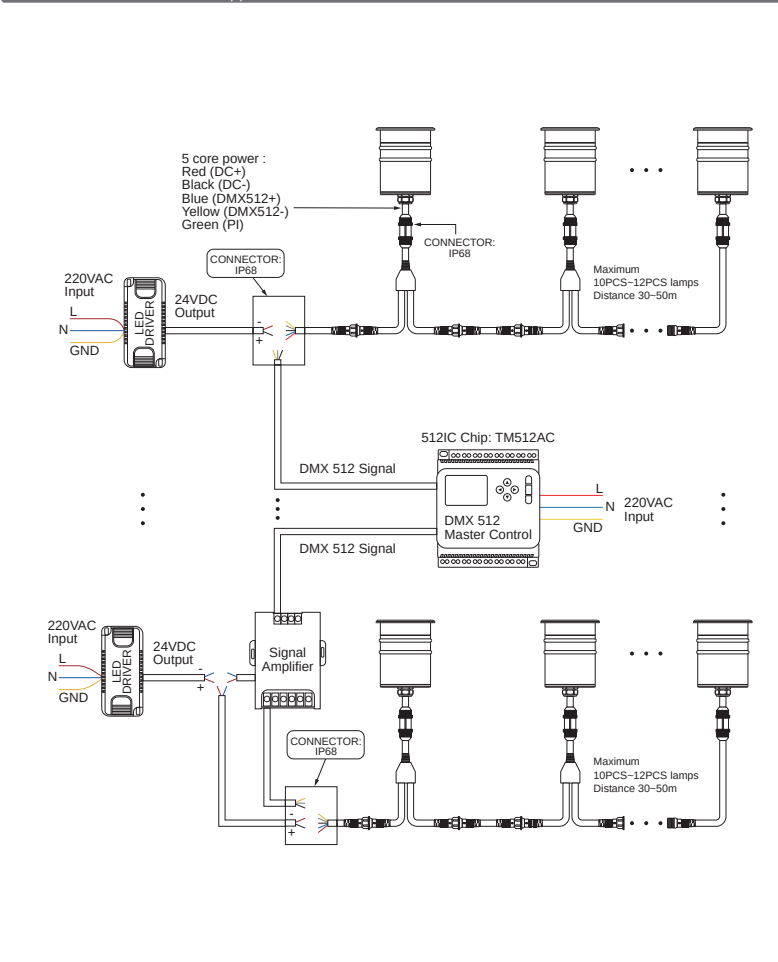


Safety tips before installation

- *Please ask an expert/authorized technician to do the installation.
- *Please cut off the power before installing to prevent electric shock.
- *Please always try to leave some space for the heat sink of the LED light. The light needs to be cooled after use.
- *Do not connect any LED lights without recommended drivers.
- *Your individual product may vary from the design shown below.
- *Do not disassemble your product.
- *Any damage caused by any modification or incorrect installation will void the warranty

Connector & Accessories



Controller

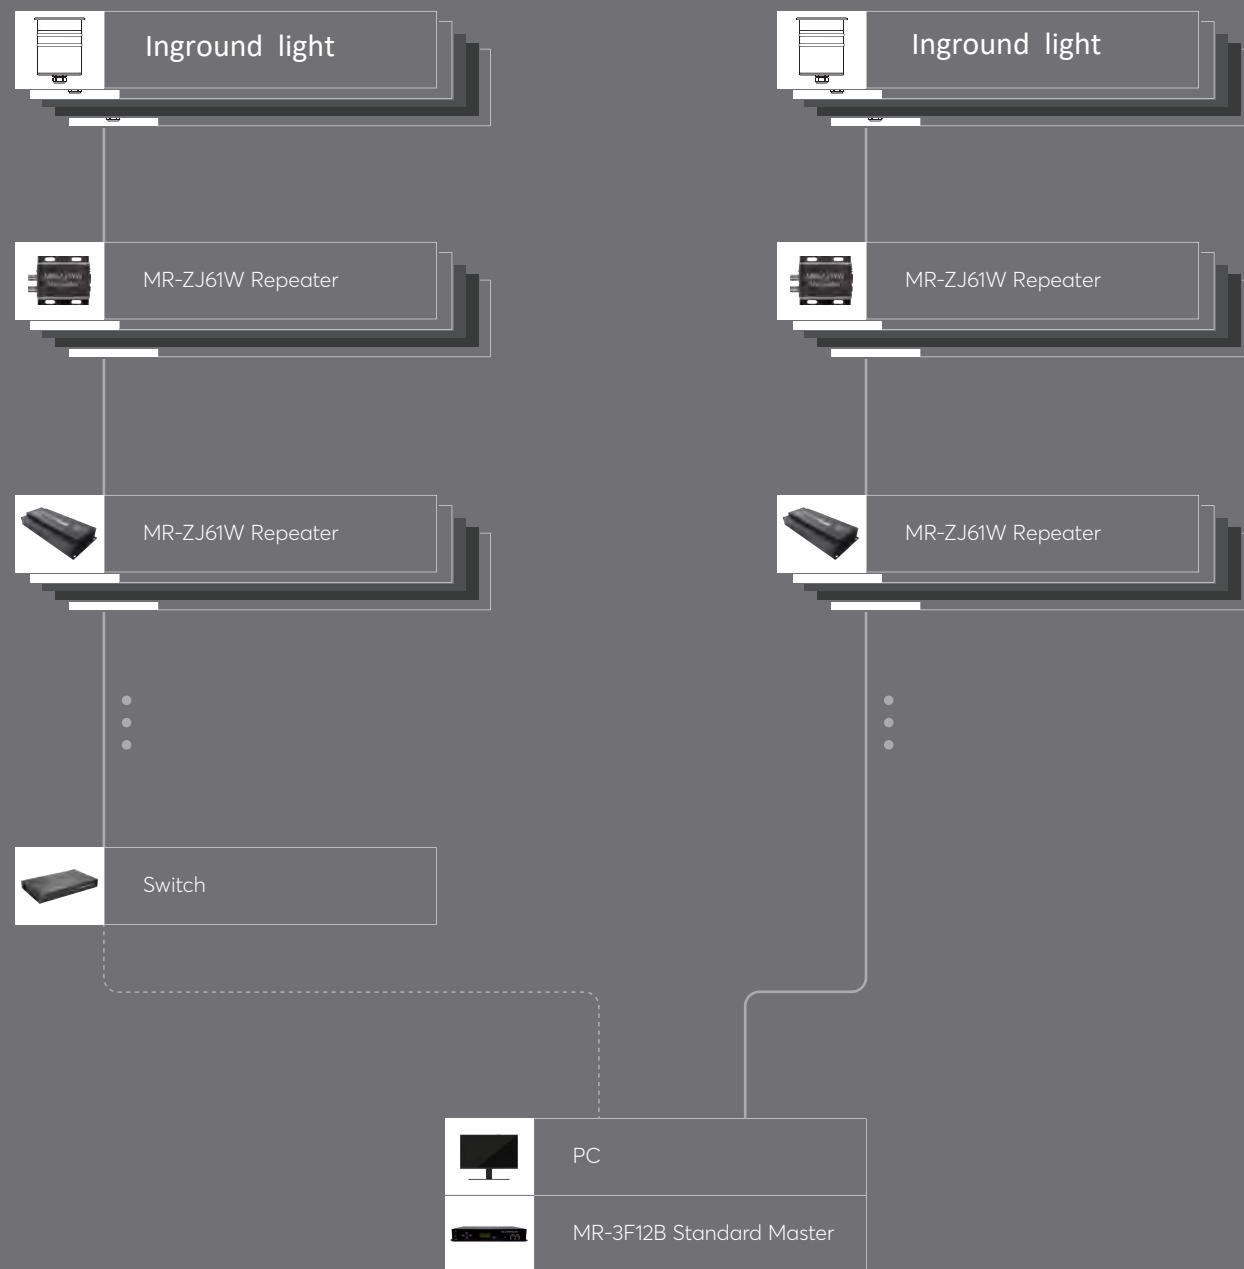


MR-3F128 Front view



MR-3F128 Rear view



Master Controller

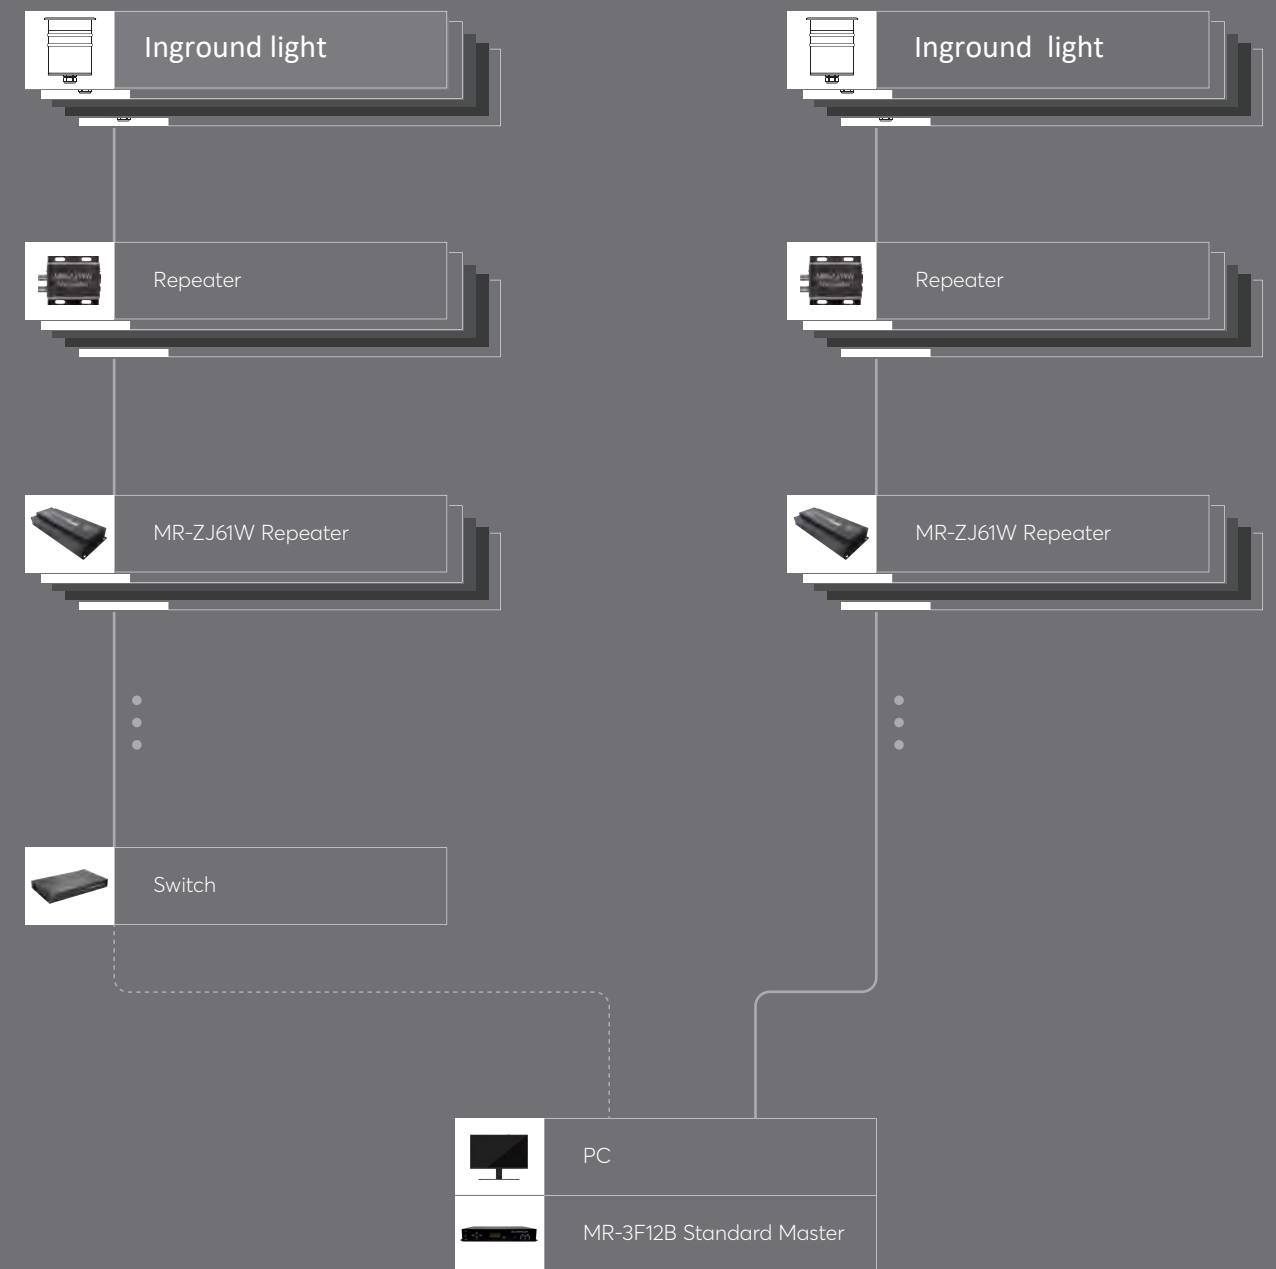

MR-228DW Front view



MR-228DW Rear view



Sub Controller