

IP65 Rated Spotlight Luminaires

ASP3425R, 240W, Round



Description:

Project: _____
 Location: _____
 Fixture Ref.: _____
 Quantity: _____
 Remarks: _____

Specifications:

Indoor/Outdoor: Outdoor
 Product No.: ASP3425R
 Input Voltage: 220-240Vac
 System Power: 240W
 Type of light source: CREE / Osram LED
 Color Rendering(CRI): Ra 80 / 90
 CCT: 2700K/3000K/4000K/5000K/6500K
 System Lumen: 10800 lm
 System Efficacy: 90 lm/W
 Light Distribution: 10°/25°/40°/60°
 Beam Angle: 10°/25°/40°/60°
 4H,8H :
 IP Rating: IP65
 Color: Aluminum
 Luminaire Lifetime: 50.000h (L80B50, Ta25°C)
 Working Temperature: -20 ~ +45 °C
 Material: ADC12 die casting body
 Electrical Class: I
 Photobiological Safety: Risk Group 1
 Dimming: ON-OFF, DMX512


Picture:



ASP3425R

ASP3425RC

Line Drawings:

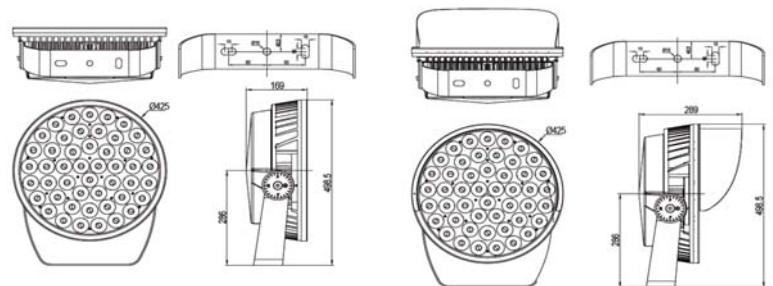

ASP3425R

ASP3425RC

Mounting / Connection:

Mounting: IP65 rated
 Cut-out: N/A
 Connection:

Packaging Information:

N.W. Fixture (Kg)
 G.W. Carton
 Mater Carton Dimension:
 Qty per Carton:

Photometrics

Please download from the website or consult the sales manager.

Ordering Information:

Model	Product Type	Wattage	Color Rendering	CCT	Beam	Dimming Options
ASP3260R		120W	8 80+ CRI	27 2700K	15°/25°/40°/60°	F ON-OFF
ASP3300R		150W	9 90+ CRI	30 3000K		
ASP3370R		200W		40 4000K		
ASP3425R		240W		50 5000K		D DALI DIM
				65 6500K		X DMX512
				RGB 3IN1		
				RGBW 4IN1		

AMAZ reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly.

Product Variants-Technical Parameters


Sub-Range	LED Type	LED Qty	CCT	Beam	Input Voltage	System Wattage
ASP3425R	240W SMD 3535	96/112	2700-6000K R/G/B	8°/15°/25°/40°/60°	24VDC DMX512	240W
	320W SMD 3535	96	RGBW 4in1	25°/40°/60°	24VDC DMX512	320W

Product Variants-Picture


Round shape




ASP3260R
120W, 15°/25°/40°/60°




ASP3260RC
120W, 15°/25°/40°/60°




ASP3300R
150W, 15°/25°/40°/60°




ASP3300RC
150W, 15°/25°/40°/60°




ASP3370R
200W, 15°/25°/40°/60°



ASP3370RC
200W, 15°/25°/40°/60°



ASP3425R
240W, 15°/25°/40°/60°



ASP3425RC
240W, 15°/25°/40°/60°

